

***banshiFMUSER FUQ-4347X/FUQ-4355X HDMI Encoder 16-24
HDMI Inputs 1 MPTS-8 SPTS Outputs MPEG4 AVC-H264 Encoding
IP Streaming for Digital Headends Broadcasting***



Product Overview

The FMUSER FUQ-4347X/FUQ-4355X encoder provides high-density HDMI encoding with 16 or 24 HDMI inputs and outputs 1 MPTS plus 8 SPTS per module. It encodes video using MPEG4 AVC/H.264 and audio with MPEG1 Layer II, LC-AAC, or HE-AAC, supporting AC3 Pass Through. The device offers web-based management for control and customization, including QR code/LOGO/caption insertion and "Null PKT Filter" support. Ideal for digital headends, cable TV systems, and broadcasting applications.

Key feature

- Supports 16 or 24 HDMI inputs with SPTS/MPTS output per module.
- Encodes video in MPEG4 AVC/H.264 and audio in MPEG1 Layer II, LC-AAC, HE-AAC with AC3 Pass Through.
- Streams via UDP/RTP/RTSP protocols over GE DATA port.
- Features web management for updates, QR code/LOGO/caption insertion, and "Null PKT Filter" support.

MPEG4 AVC/H.264 video encoding format

MPEG1 Layer II, LC-AAC ■ HE-AAC audio encoding format and AC3 Pass Through, and audio gain adjustment


IP output over UDP and RTP/RTSP protocol

Support QR code, LOGO, caption insertion

Support "Null PKT Filter" function

Control via web management, and easy updates via web

Principle Chart (Each Encoder Module)

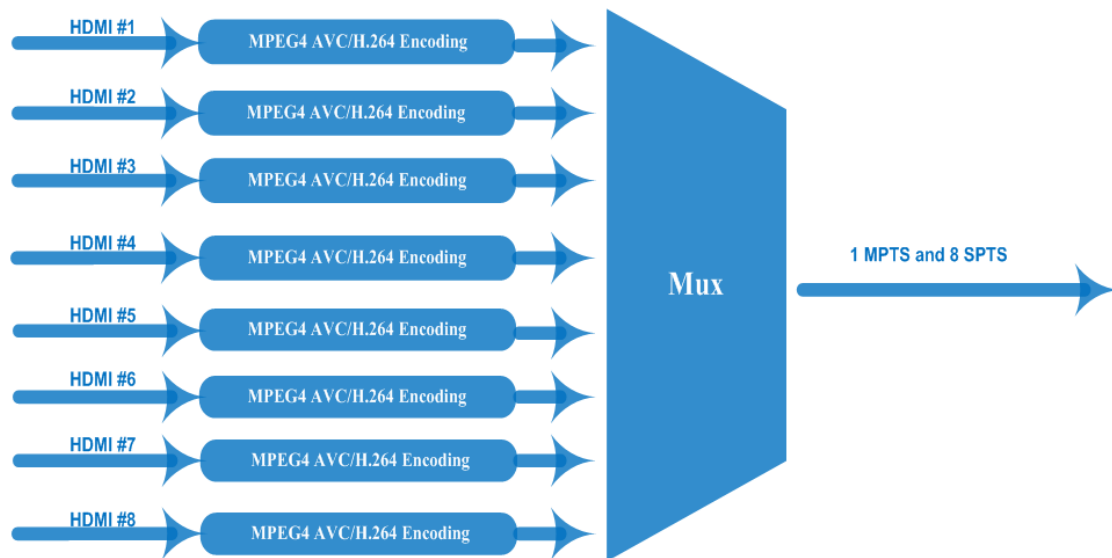

Technical specification

Input	16 HDMI inputs (FU-4347S); 24 HDMI inputs (FU-4355S)	16 HDMI inputs (FU-4347S); 24 HDMI inputs (FU-4355S)	16 HDMI inputs (FU-4347S); 24 HDMI inputs (FU-4355S)	16 HDMI inputs (FU-4347S); 24 HDMI inputs (FU-4355S)
Video	Resolution	input	input	1920×1080_60P, 1920×1080_60i, 1920×1080_50P, 1920×1080_50i, 1280×720_60P, 1280×720_50P, 720 x 576_50i, 720 x 480_60i
Video	Resolution	Output	Output	1920×1080_30P, 1920×1080_25P, 1280×720_30P, 1280×720_25P, 720 x 576_25P, 720 x 480_30P
Video	Encoding	Encoding	Encoding	MPEG-4 AVC/H.264
Video	Bit-rate	Bit-rate	Bit-rate	1~13Mbps each channel
Video	Rate Control	Rate Control	Rate Control	CBR/VBR

Video	GOP Structure	GOP Structure	GOP Structure	IP...P (P Frame adjustment, without B Frame)
Audio	Encoding	Encoding	Encoding	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass through
Audio	Sampling rate	Sampling rate	Sampling rate	48KHz
Audio	Resolution	Resolution	Resolution	24-bit
Audio	Audio Gain	Audio Gain	Audio Gain	0-255 Adjustable
Audio	MPEG-1 Layer 2 Bit-rate	MPEG-1 Layer 2 Bit-rate	MPEG-1 Layer 2 Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps
Audio	LC-AAC Bit-rate	LC-AAC Bit-rate	LC-AAC Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps
Audio	HE-AAC Bit-rate	HE-AAC Bit-rate	HE-AAC Bit-rate	48/56/64/80/96/112/128 kbps
Stream output	IP output through DATA (GE) over UDP and RTP/R TSP protocol (8 HDMI inputs with 8 SPTS and 1MPTS output for each encoder module)	IP output through DATA (GE) over UDP and RTP/R TSP protocol (8 HDMI inputs with 8 SPTS and 1MPTS output for each encoder module)	IP output through DATA (GE) over UDP and RTP/R TSP protocol (8 HDMI inputs with 8 SPTS and 1MPTS output for each encoder module)	IP output through DATA (GE) over UDP and RTP/R TSP protocol (8 HDMI inputs with 8 SPTS and 1MPTS output for each encoder module)
System function	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System function	English language	English language	English language	English language
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L×H)	Dimension(W×L×H)	440mm×324mm×44mm	440mm×324mm×44mm

Miscellaneous	Environment	Environment	0~45■(work)■-2 0~80■■■Storage ■	0~45■(work)■-2 0~80■■■Storage ■
Miscellaneous	Power requirements	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz

Order Guide

P/N	Config
FU-4347S	16 HDMI inputs
FU-4355S	24 HDMI inputs

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)