


FMUSER FUQ-4349S 8-Channel FM Receiver 8 FM Inputs MPEG1 Layer-2 Encoding ASI-IP Outputs Audio-to-Digital TS Conversion for HFC Terrestrial Systems

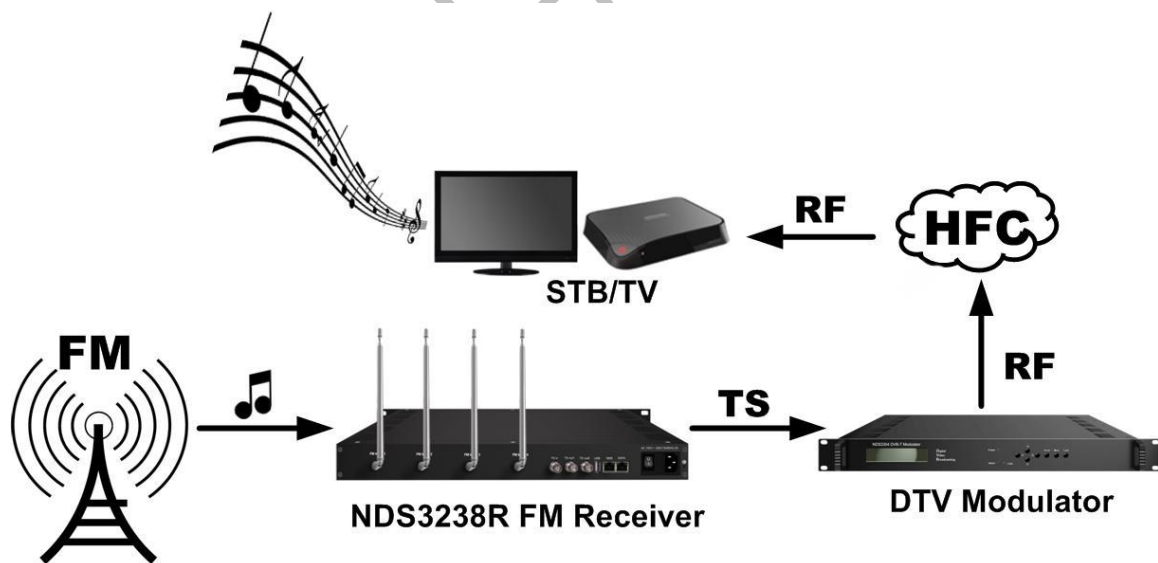

Product Overview

The FMUSER FUQ-4349S is an 8-in-1 FM receiver that captures FM audio and outputs via ASI and IP ports. It compresses audio into digital TS streams using MPEG1 Layer 2 encoding. Features LCD/keyboard control and web-based NMS for management. Ideal for professional audio distribution in HFC or terrestrial systems, integrating with STBs or TVs. Each antenna receives two audios and this unit can maximally process 8 audios. In addition, it is equipped with one ASI input port as well for Audio/Video re-mux. It is featured to operators with its high capacity and integration.

Key feature

Supports reception of 8 FM audio channels via 4 antennas for dual-audio capability.


Features ASI input for Audio/Video re-mux and remultiplexing.

Provides MPEG1 Layer 2 audio encoding with adjustable bit-rates and volume control.

Offers 2 ASI mirrored outputs and IP output over UDP/RTP for versatile distribution.

Enables control via LCD/keyboard and web-based NMS for monitoring and updates.

Inner Principle Chart

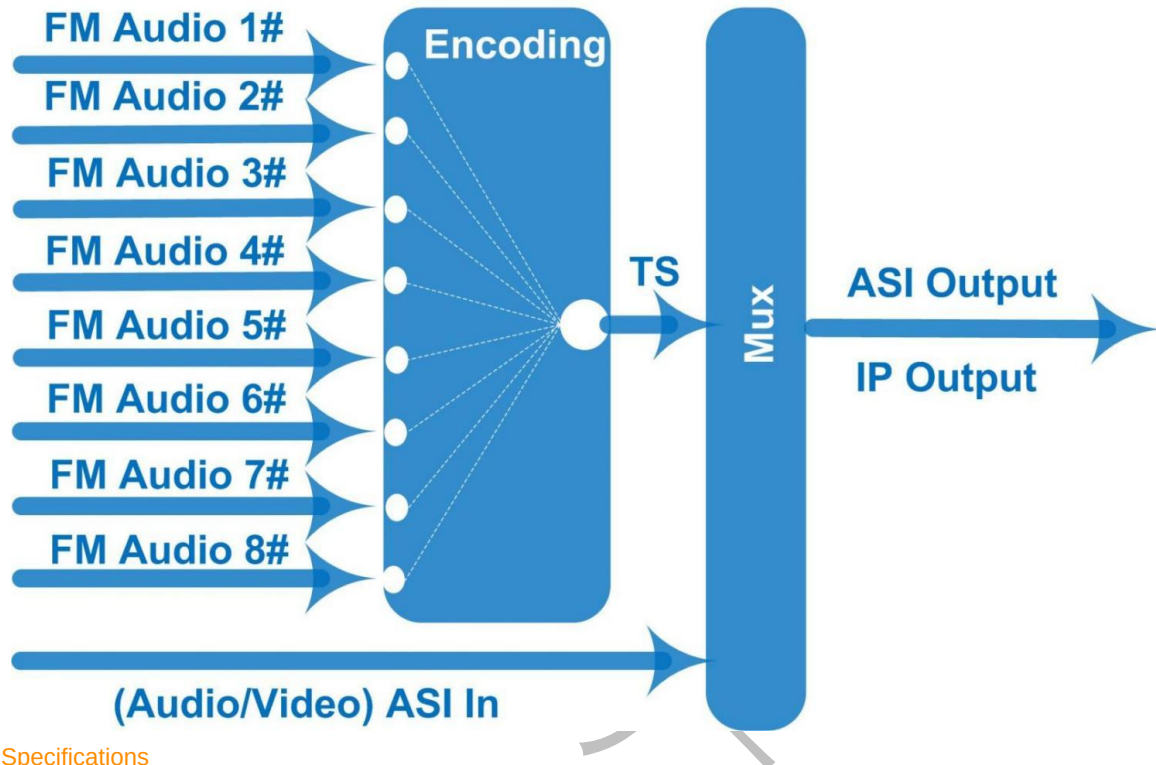

Specifications

FM Receiving	Antenna Frequency	76-108 MHz
FM Receiving	Volume Control	0%-100%
FM Receiving	FM lock status and signal quality display	FM lock status and signal quality display
Audio Encode	Encoding Format	MPEG1 Layer 2
Audio Encode	Audio Gain	0-255
Audio Encode	Sampling Rate	48KHz
Audio Encode	Bit-rate	32/48/56/64/80/96/112/128/160/192/224/256/320/384Kb/s (each channel)
Stream In/Out	1*ASI input, BNC interface	1*ASI input, BNC interface
Stream In/Out	2*ASI mirrored output, BNC interface	2*ASI mirrored output, BNC interface

Stream In/Out	8*SPTS+1*MPTS over UDP/RTP, 1000M Base-T Ethernet interface (unicast/multicast) (SPTS output is for the FM input audio)	8*SPTS+1*MPTS over UDP/RTP, 1000M Base-T Ethernet interface (unicast/multicast) (SPTS output is for the FM input audio)
System	LCD/keyboard operating, web-based NMS manage	LCD/keyboard operating, web-based NMS manage
System	Language: English/Chinese	Language: English/Chinese
System	Ethernet software & hardware upgrade	Ethernet software & hardware upgrade
Miscellaneous	Dimension	482mm×455mm×44mm (W×L× H)
Miscellaneous	Temperature	0~45■ (work), -20~80■■■Storage■
Miscellaneous	Power	AC 100V-220V±10%, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227