

FMUSER FUQ-4353B HD-SD Encoder 4 Input Channels SDI-HDMI-ASI-IP Interfaces MPEG-2 H.264 Encoding ASI Re-multiplexing Broadcast Headend System

Product Overview



The FMUSER FUQ-4353B is a professional HD/SD encoder supporting MPEG-2 and H.264 video encoding with four SDI or HDMI inputs. It processes signals by encoding and re-multiplexing into MPTS or SPTS, outputting via ASI and IP. Featuring a modular drawer design, it is ideal for broadcast, cable TV, and streaming applications. HDMI inputs supporting MPEG-2 and MPEG-4 AVC/H.264 video encoding and MPEG-2, MPEG-2 AAC, MPEG-4 AAC and DD AC3 audio encoding. The 4 encoded programs will output through ASI and IP ports in MPTS or SPTS, and there is also one ASI in port for re-multiplexing. It adopts inner drawer-type structural design which greatly facilitates the change of encoding modules if needed.

Key feature


Supports MPEG2 HD/SD and MPEG4 AVC/H.264 video encoding with resolution downscale conversion

Multiple audio encoding options: MPEG2, AAC, and AC3, including dialog normalization

Flexible input configurations: 4x SDI, 4x HDMI, or mixed inputs

Advanced features: low delay, closed caption support, and web-based NMS management

Principle Chart

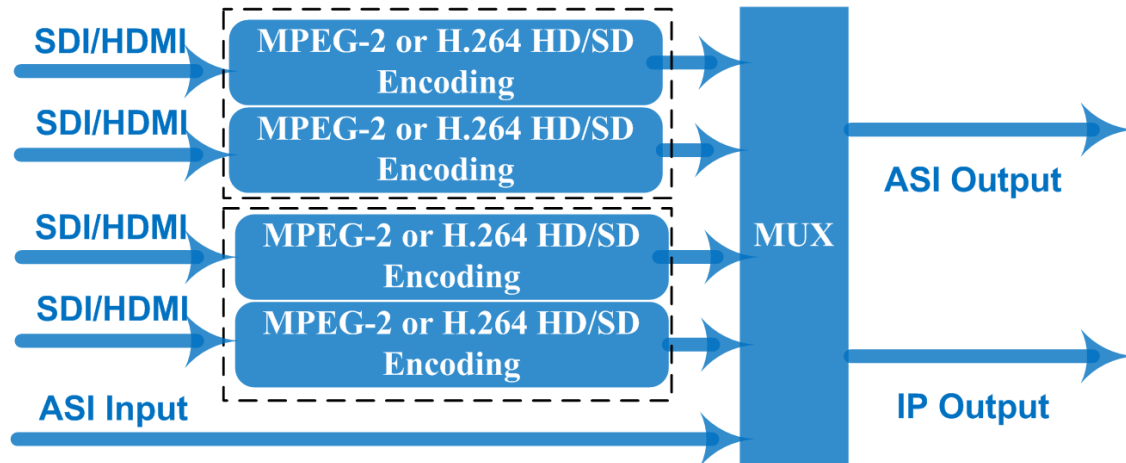

Technical Specifications

Encoding Section

Video

Encoding	MPEG2 & MPEG4 AVC/H.264
Input	SDI*4 or HDMI*4 + 1 ASI in
Resolution	1920*1080_60P, 1920*1080_50P, (-for MPEG4 AVC/H.264 only) 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P 720*480_60i, 720*576_50i
Support object resolution (for downscale conversion)	1920*1080_60P, 1920*1080_50P, (-for MPEG4 AVC/H.264 only) 1440*1080_60i, 1440*1080_50i, 1280*720_60p, 1280*720_50P 720*480_60i, 720*576_50i
Bit Rate	1~19.5Mbps
Chroma Sample	4:2:0
Aspect Ratio	16:9, 4:3

Audio

encoding	MPEG 2, MPEG2-AAC, MPEG4-AAC, Dolby Digital AC3 (2.0)
Dialog Normalization Applicable for DD AC3 encoding only)	-31 ~ -1 dB
Sample rate	48KHz
Bit rate	64kbps, 96kbps, 128kbps, 192kbps, 256kbps, 320kbps

System

Local interface	LCD + control buttons
Remote management	Web NMS
Low Delay Mode	Normal, mode 1, mode 2, Manual
output	2*ASI out (BNC type, mirror ports/the same one TS); IP (1 MPTS & 4 SPTS) over UDP, RTP/RTSP (RJ45, 1000M)
NMS interface	RJ45, 100M
Language	English

General

Power	AC 100V~240V
Dimensions	482*400*44mm
Operation temperature	0~45℃

Technical Comparision

	The Former Version	The Current Version■V2■
ASI in	No	Yes
Bit rate Mode	CBR/VBR option	CBR
Audio Group/Pair option-SDI	No	Yes
Video Bit Rate	0.5~19.5Mbps for H.264 encoding 1~19.5Mbps for MPEG-2 encoding	1~19.5Mbps
Low Delay	Normal/Mode 1/Mode 2	Normal/Mode 1/Mode 2/Manual
Character Encoding option	No	Yes
Output Protocol	UDP, RTP	UDP, RTP/RTSP
DATA Port	100M port	1000M port

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227

FMUSER 广州艾曼