

FMUSER FUQ-4353C 4-Channel Encoder 4x HDMI-YPbPr-CVBS Input 2x ASI-IP Output MPEG2 MPEG4 H.264 Dual-Output EIA608 Closed Captioning Digital TV Headend IPTV System

Product Overview





The FMUSER FUQ-4353C is a professional 4-in-1 HD encoder featuring 4x HDMI/YPbPr/CVBS inputs and dual-output via ASI (2x) + IP (UDP/RTP/RTSP). It performs real-time MPEG2/MPEG4 H.264 encoding with AC3 passthrough and EIA608 Closed Captioning support. The 1RU rack-mount unit offers web-based NMS control and firmware upgrades. Ideal for digital TV headends, IPTV systems, and satellite uplink applications.

Key feature

1. Multi-standard encoding: Supports MPEG2 & H.264 with HD-to-SD downscaling (1080i/720p/576i)
2. Flexible audio handling: AC3 2.0/5.1/7.1 passthrough + MPEG4-AAC/MP2 encoding
3. Dual-output architecture: 2x ASI outputs (SPTS/MPTS) + IP streaming (UDP/RTP/RTSP)
4. Broadcast features: EIA608 Closed Captioning, LCN support, low-latency mode
5. Remote management: Web GUI + SNMP v2/v3 for NMS integration

Principle Chart

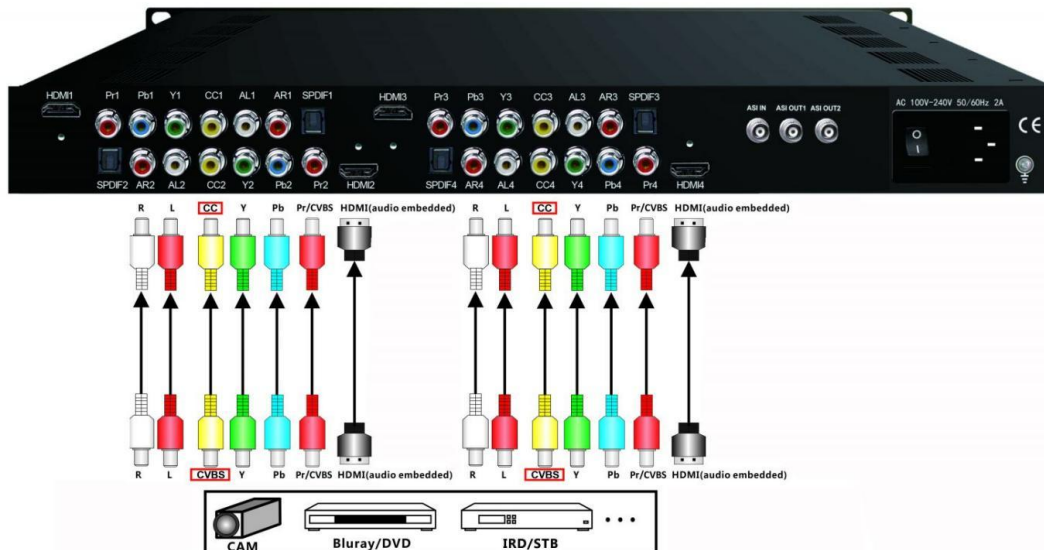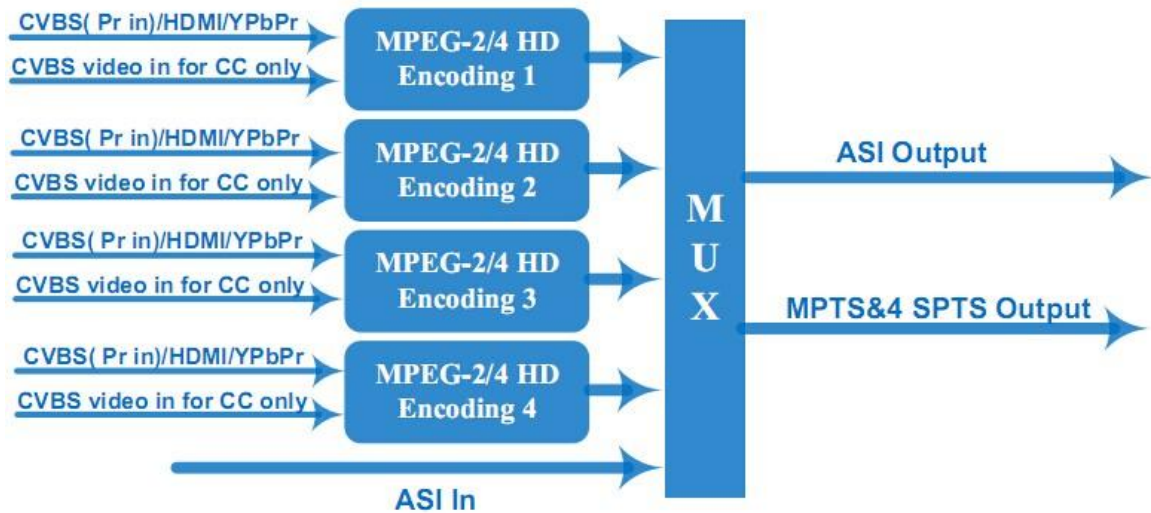

Specifications

Encoding Section	Encoding Section	Encoding Section
Video (HDMI)	Video (HDMI)	Video (HDMI)
Encoding	MPEG2; MPEG4 AVC/H.264	MPEG2; MPEG4 AVC/H.264
Interface	HDMI*4	HDMI*4
Resolution	Input	Output

Resolution	1920*1080_60P, 1920*1080_50P (For MPEG 4 AVC/H.264 only), 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P	1920*1080_60i, 1920*1080_50i, 1440*1080_60i, 1440*1080_50i 1280*720_60p, 1280*720_50P, 720*480_60i, 720*576_50i
Low Delay	Normal, Mode 1, Mode 2	Normal, Mode 1, Mode 2
Audio (HDMI)	Audio (HDMI)	Audio (HDMI)
Encoding	MPEG1 Layer II; MPEG2-AAC; MPEG4-AAC; DD AC3 (2.0) Optional; DD AC3 (2.0/5.1/7.1) passthrough	MPEG1 Layer II; MPEG2-AAC; MPEG4-AAC; DD AC3 (2.0) Optional; DD AC3 (2.0/5.1/7.1) passthrough
Interface	HDMI*4 /SPDIF*4	HDMI*4 /SPDIF*4
Sample rate	48KHz	48KHz
Bit rate	64/96/128/ 192/256/320kbps	64/96/128/ 192/256/320kbps
Video (CVBS/YPbPr)	Video (CVBS/YPbPr)	Video (CVBS/YPbPr)
Encoding	MPEG2; MPEG4 AVC/H.264	MPEG2; MPEG4 AVC/H.264
Interface	CVBS/YPbPr*4 (RCA)	CVBS/YPbPr*4 (RCA)
Resolution	CVBS: 720*576_50i, 720*480_60i	CVBS: 720*576_50i, 720*480_60i
Resolution	YPbPr Input	YPbPr Output
Resolution	1920*1080_60i, 1920*1080_50 i; 1280*720_60p, 1280*720_50P	1920*1080_60i, 1920*1080_50i, 1440*1080_60i, 1440*1080_50i 1280*720_60p, 1280*720_50P, 720*480_60i, 720*576_50i
Low Delay	Normal, Mode 1, Mode 2	Normal, Mode 1, Mode 2
Audio (L/R)	Audio (L/R)	Audio (L/R)
Encoding	MPEG1 Layer II; MPEG2-AAC; MPEG4-AAC; DD AC3 (2.0) Optional	MPEG1 Layer II; MPEG2-AAC; MPEG4-AAC; DD AC3 (2.0) Optional
Interface	4*Stereo/8*mono/4*SPDIF	4*Stereo/8*mono/4*SPDIF
Sample rate	48KHz	48KHz
Bit rate	64/96/128/ 192/256/320kbps	64/96/128/ 192/256/320kbps

System	System	System
Local interface	LCD + control buttons	LCD + control buttons
Remote management	Web NMS	Web NMS
Stream Out	2 ASI mirrored out (BNC type, 100M); IP (MPTS&4 SPTS) over UDP, RTP/RTSP out (RJ45, 100M)	2 ASI mirrored out (BNC type, 100M); IP (MPTS&4 SPTS) over UDP, RTP/RTSP out (RJ45, 100M)
NMS interface	RJ45, 100M	RJ45, 100M
Aspect Ratio	4:3; 16:9	4:3; 16:9
Language	English	English
General	General	General
Power supply	Power supply	AC 100V~240V
Dimensions	Dimensions	482*400*44mm
Weight	Weight	4.5 kg
Operation temperature	Operation temperature	0~45■

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)