

FMUSER FUQ-4354 Decoder Transcoder 32 IP 2 Tuner 1 ASI Input DVB-C-T-S2-ATSC Output IP ASI CVBS YPbPr HDMI SDI Interfaces AVS+-H.264-MPEG-2 Standards Broadcast IPTV Systems Product overview




The FUQ-4354 integrates demodulation, descrambling, decoding, and transcoding, supporting inputs like 32× IP, 2× tuner, and 1× ASI, with outputs including IP, ASI, CVBS, YPbPr, HDMI, and SDI. It processes signals by converting AVS+ to H.264/MPEG-2, transcoding video and audio, and downscaling HD to SD. Managed via web-based NMS, it is designed for broadcast systems, enabling efficient video handling for operators. It can be easily managed through web NMS system, and has become an ideal solution for operator to provide high quality video trans-coding.

KeyFeature

- Supports multi-format inputs: 32× IP (UDP/RTP), 2× tuner with CAM/CI slots, and 1× ASI.
- Enables flexible transcoding: AVS+/MPEG-2/H.264 SD/HD video conversion; MPEG-2/AAC/AC3 audio with CBR/VBR control.
- Provides diverse outputs: IP/ASI streams, CVBS, YPbPr, HDMI, and SDI.
- Features advanced control: BISS descrambling, web-based NMS, and local LCD/keyboard management.

Principle Chart

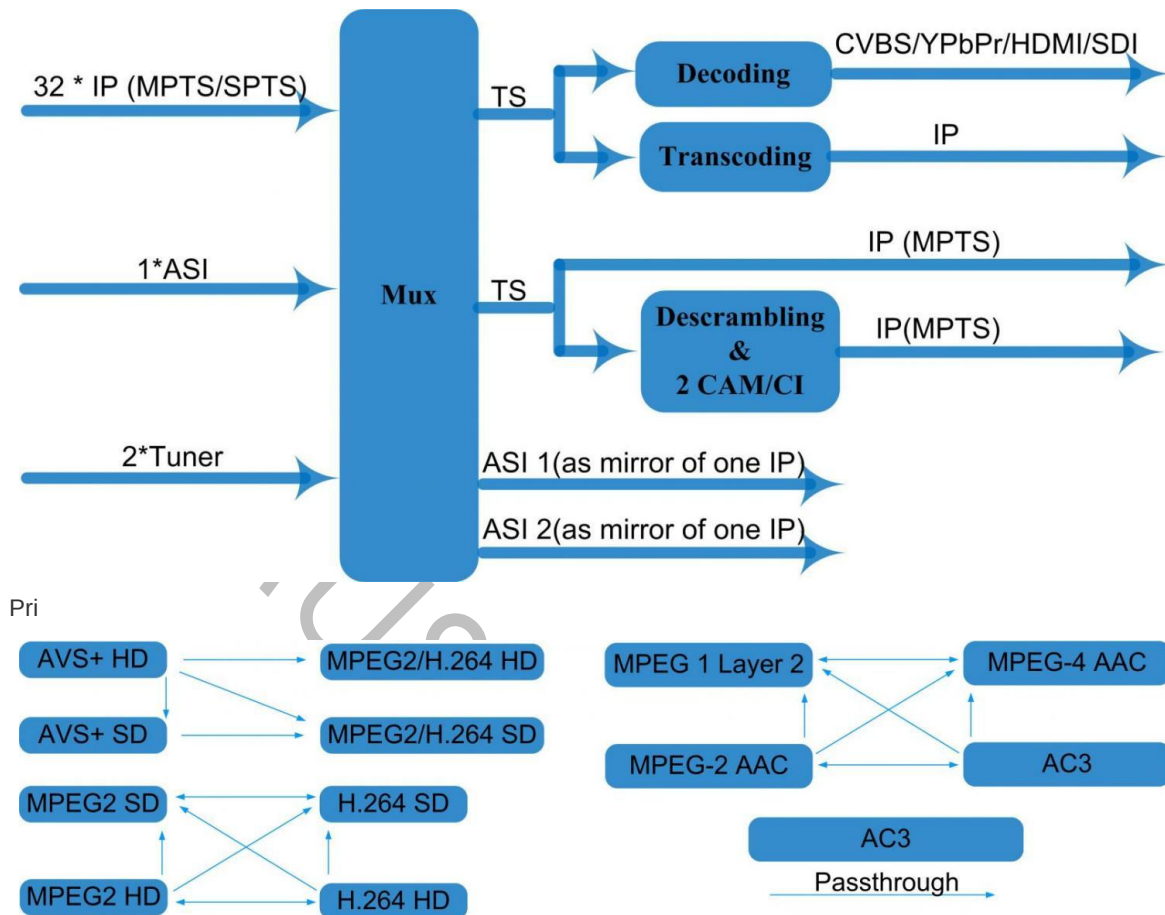

Specifications

Stream In	32 IP over UDP/RTP, 2*100/1000M Base-T Ethernet Interface	32 IP over UDP/RTP, 2*100/1000M Base-T Ethernet Interface	32 IP over UDP/RTP, 2*100/1000M Base-T Ethernet Interface
Stream In	2 * DVB-C/T/S2/ATSC Tuners	2 * DVB-C/T/S2/ATSC Tuners	2 * DVB-C/T/S2/ATSC Tuners
Stream In	1 ASI input	1 ASI input	1 ASI input
BISS Descramble	1 program	1 program	1 program
BISS Descramble	Mode 0, Mode1, Mode E	Mode 0, Mode1, Mode E	Mode 0, Mode1, Mode E
Transcoding	Video	AVS+ HD → MPEG2/H.264 HD AVS+ HD → MPEG2/H.264 SD AVS+ SD → MPEG2/H.264 SD	AVS+ HD → MPEG2/H.264 HD AVS+ HD → MPEG2/H.264 SD AVS+ SD → MPEG2/H.264 SD

Transcoding	Video	MPEG2 HD → MPEG2/H.264 HD ; MPEG2 HD → MPEG2/H.264 SD ; MPEG2 SD → MPEG2/H.264 SD	MPEG2 HD → MPEG2/H.264 HD ; MPEG2 HD → MPEG2/H.264 SD ; MPEG2 SD → MPEG2/H.264 SD
Transcoding	Video	H.264 HD → MPEG2/H.264 HD ; H.264 HD → MPEG2/H.264 SD ; H.264 SD → MPEG2/H.264 SD	H.264 HD → MPEG2/H.264 HD ; H.264 HD → MPEG2/H.264 SD ; H.264 SD → MPEG2/H.264 SD
Transcoding	Audio	MPEG-2, MPEG-2 AAC, MPEG-4 AAC and AC3 any to any; AC3 pass through	MPEG-2, MPEG-2 AAC, MPEG-4 AAC and AC3 any to any; AC3 pass through
Decoding	Video Output	1×CVBS; 1×YPbPr ; 1×HDMI; 2×HD-SDI	1×CVBS; 1×YPbPr ; 1×HDMI; 2×HD-SDI
Decoding	Resolution	480i■480p■576i■576 p■720p@50■720p@ 60■1080i@50■1080i @60, 1080p@50, 1080p@60	480i■480p■576i■576 p■720p@50■720p@ 60■1080i@50■1080i @60, 1080p@50, 1080p@60
Decoding	Rate Control	CBR/VBR	CBR/VBR
Decoding	Audio Output	1*Stereo /2*mono, HDMI■SDI	1*Stereo /2*mono, HDMI■SDI
Decoding	Audio Sampling	48KHz	48KHz
Decoding	Audio Bit Rate	64Kbps-384Kbps	64Kbps-384Kbps
Stream Out	3*IP over UDP protocol, 2*100M/1000M Base-T Ethernet Interface, one for backup	3*IP over UDP protocol, 2*100M/1000M Base-T Ethernet Interface, one for backup	3*IP over UDP protocol, 2*100M/1000M Base-T Ethernet Interface, one for backup
Stream Out	2 groups separate ASI outputs (each group has 2 channels, as a copy of one of IP) output, BNC interface	2 groups separate ASI outputs (each group has 2 channels, as a copy of one of IP) output, BNC interface	2 groups separate ASI outputs (each group has 2 channels, as a copy of one of IP) output, BNC interface
System Function	LCD & Key board control; web-based NMS management	LCD & Key board control; web-based NMS management	LCD & Key board control; web-based NMS management

System Function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimensions	Dimensions	430mm×405mm×45mm (WxDxH)
General	Approx weight	Approx weight	4.8 Kg
General	Temperature range	Temperature range	0~45■(Operation), -20~80■(Storage)
General	Power requirements	Power requirements	AC 200V-240V, 50/60Hz, 2A

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)