

FMUSER FUQ-4354 Transcoder Single Channel 32 IP Streams 2 Tuners ASI Input DVB-C-T-S2-ATSC Demodulation Decoding Transcoding for Broadcast Operators

Product overview



The FMUSER FUQ-4354 is a single-channel transcoder integrating demodulation (optional DVB-C/T/S2/ATSC), descrambling, decoding, and transcoding. It processes signals by accepting inputs via 2 tuners with CAM/CI slots, ASI, and 32 IP streams (UDP/RTP), supporting any-to-any conversion between AVS+ and H.264/MPEG-2 with HD-to-SD downscaling. Controlled via web NMS, this unit is ideal for broadcast transmission and cable distribution systems.

KeyFeature

Supports flexible inputs: 32 IP streams (UDP/RTP), 2 tuners with CAM/CI slots, and ASI.


Enables multi-format video transcoding: any-to-any conversion between AVS+, MPEG-2, and H.264 in SD/HD, including HD-to-SD downscaling.

Features advanced audio handling: any-to-any transcoding of MPEG-2, AAC, and AC3 with AC3 pass-through.

Provides robust outputs: 3 IP (UDP), 2 ASI groups, and decoded video/audio (CVBS/YPbPr/HDMI/SDI).

Offers secure management: BISS descrambling, CBR/VBR control, and web NMS for remote monitoring.

Principle Chart

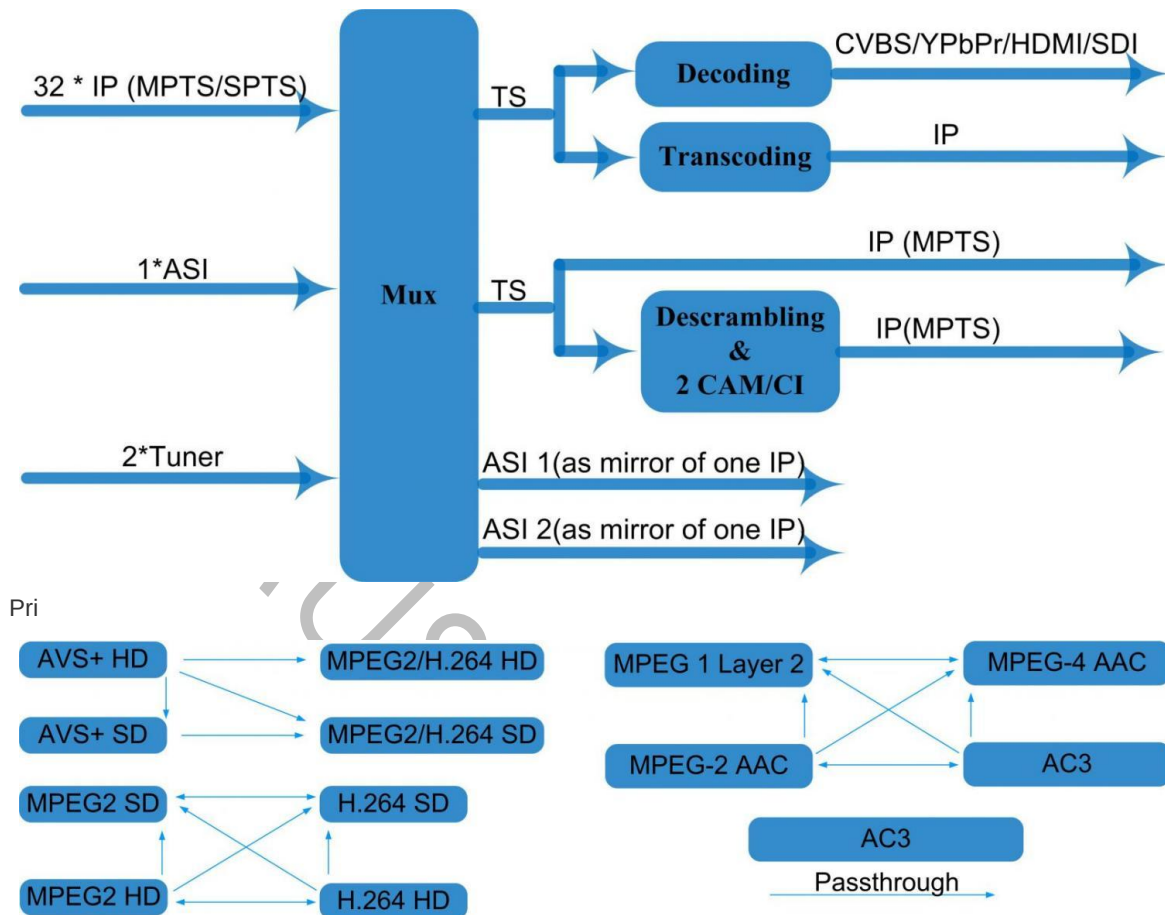

Specifications

Stream In	32 IP over UDP/RTP, 2*100/1000M Base-T Ethernet Interface	32 IP over UDP/RTP, 2*100/1000M Base-T Ethernet Interface	32 IP over UDP/RTP, 2*100/1000M Base-T Ethernet Interface
Stream In	2 * DVB-C/T/S2/ATSC Tuners	2 * DVB-C/T/S2/ATSC Tuners	2 * DVB-C/T/S2/ATSC Tuners
Stream In	1 ASI input	1 ASI input	1 ASI input
BISS Descramble	1 program	1 program	1 program
BISS Descramble	Mode 0, Mode1, Mode E	Mode 0, Mode1, Mode E	Mode 0, Mode1, Mode E
Transcoding	Video	AVS+ HD → MPEG2/H.264 HD AVS+ HD → MPEG2/H.264 SD AVS+ SD → MPEG2/H.264 SD	AVS+ HD → MPEG2/H.264 HD AVS+ HD → MPEG2/H.264 SD AVS+ SD → MPEG2/H.264 SD

Transcoding	Video	MPEG2 HD → MPEG2/H.264 HD ; MPEG2 HD → MPEG2/H.264 SD ; MPEG2 SD → MPEG2/H.264 SD	MPEG2 HD → MPEG2/H.264 HD ; MPEG2 HD → MPEG2/H.264 SD ; MPEG2 SD → MPEG2/H.264 SD
Transcoding	Video	H.264 HD → MPEG2/H.264 HD ; H.264 HD → MPEG2/H.264 SD ; H.264 SD → MPEG2/H.264 SD	H.264 HD → MPEG2/H.264 HD ; H.264 HD → MPEG2/H.264 SD ; H.264 SD → MPEG2/H.264 SD
Transcoding	Audio	MPEG-2, MPEG-2 AAC, MPEG-4 AAC and AC3 any to any; AC3 pass through	MPEG-2, MPEG-2 AAC, MPEG-4 AAC and AC3 any to any; AC3 pass through
Decoding	Video Output	1×CVBS; 1×YPbPr ; 1×HDMI; 2×HD-SDI	1×CVBS; 1×YPbPr ; 1×HDMI; 2×HD-SDI
Decoding	Resolution	480i■480p■576i■576 p■720p@50■720p@ 60■1080i@50■1080i @60, 1080p@50, 1080p@60	480i■480p■576i■576 p■720p@50■720p@ 60■1080i@50■1080i @60, 1080p@50, 1080p@60
Decoding	Rate Control	CBR/VBR	CBR/VBR
Decoding	Audio Output	1*Stereo /2*mono, HDMI■SDI	1*Stereo /2*mono, HDMI■SDI
Decoding	Audio Sampling	48KHz	48KHz
Decoding	Audio Bit Rate	64Kbps-384Kbps	64Kbps-384Kbps
Stream Out	3*IP over UDP protocol, 2*100M/1000M Base-T Ethernet Interface, one for backup	3*IP over UDP protocol, 2*100M/1000M Base-T Ethernet Interface, one for backup	3*IP over UDP protocol, 2*100M/1000M Base-T Ethernet Interface, one for backup
Stream Out	2 groups separate ASI outputs (each group has 2 channels, as a copy of one of IP) output, BNC interface	2 groups separate ASI outputs (each group has 2 channels, as a copy of one of IP) output, BNC interface	2 groups separate ASI outputs (each group has 2 channels, as a copy of one of IP) output, BNC interface
System Function	LCD & Key board control; web-based NMS management	LCD & Key board control; web-based NMS management	LCD & Key board control; web-based NMS management

System Function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimensions	Dimensions	430mm×405mm×45mm (WxDxH)
General	Approx weight	Approx weight	4.8 Kg
General	Temperature range	Temperature range	0~45■(Operation), -20~80■(Storage)
General	Power requirements	Power requirements	AC 200V-240V, 50/60Hz, 2A

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)