

**FMUSER FUQ-4359 Bidirectional Transcoder 8 IP + 6 Tuner-ASI
Inputs MPTS-SPTS Outputs UDP-RTP-RTSP MPEG-2 H.264 HD-SD
BISS Descramble Broadcast Operators**



AC3 trans-coding (Optional)
CC (Closed Caption)
BISS Descrambling

Product overview

The FMUSER FUQ-4359 is a bidirectional transcoder supporting H.264/MPEG-2 and HD/SD conversion, with 6 tuner inputs and ASI/IP inputs for reception, and outputs MPTS/SPTS via IP or ASI. It performs any-to-any transcoding with CBR/VBR rate control. Features include BISS descrambling, CC support, and web NMS management with LCD/keyboard interface. Ideal for satellite TV operators and broadcast content distribution.

Key feature

Supports versatile inputs: 8×IP (SPTS/MPTS) plus 6×tuners or 6×ASI.


Delivers flexible outputs: 8×SPTS & 1×MPTS via UDP/RTP/RTSP, plus ASI output.

Enables advanced transcoding: Any-to-any MPEG-2/H.264 conversion in HD/SD with CBR/VBR control.


Features integrated security: BISS descrambling and CC support.

Provides centralized control: Web NMS management with LCD/keyboard interface.

Principle Chart (FU-4359)

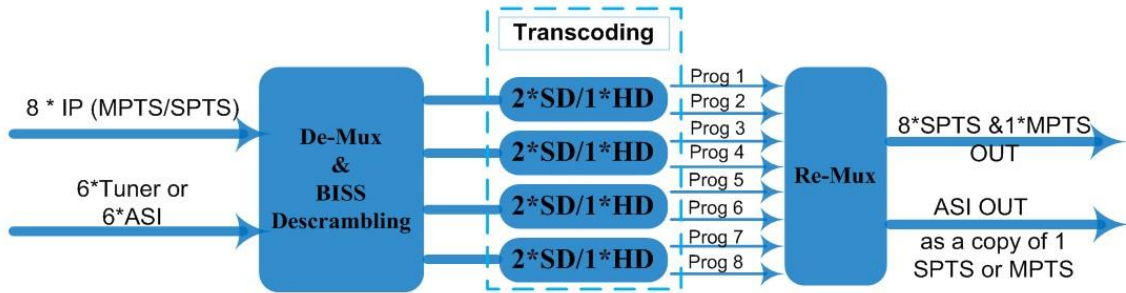

Transcoding Mode Example

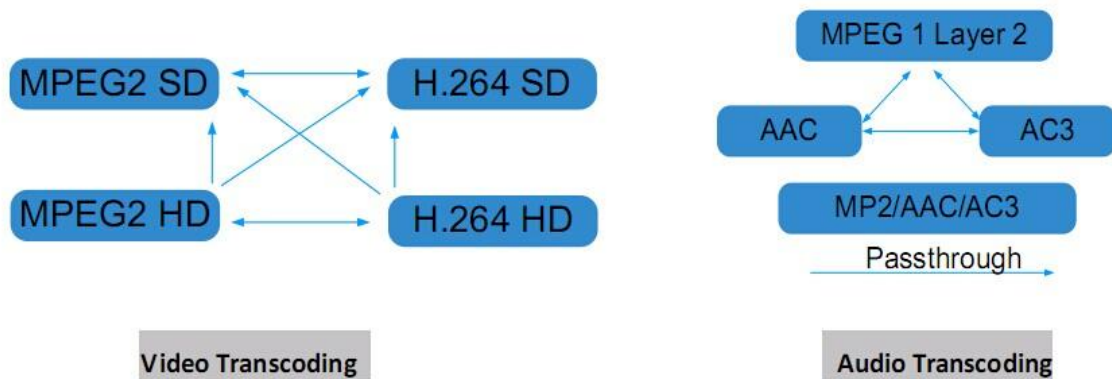

Technical Specifications

Stream In	MPTS/SPTS over UD P/RTP, 1000M Base-T Ethernet Interface/ SFP interface	MPTS/SPTS over UD P/RTP, 1000M Base-T Ethernet Interface/ SFP interface	MPTS/SPTS over UD P/RTP, 1000M Base-T Ethernet Interface/ SFP interface
Stream In	6 * (DVB-S/S2/C/T/IS DB-T/ATSC) Tuners; 6 * ASI (optional)	6 * (DVB-S/S2/C/T/IS DB-T/ATSC) Tuners; 6 * ASI (optional)	6 * (DVB-S/S2/C/T/IS DB-T/ATSC) Tuners; 6 * ASI (optional)
BISS Descramble	Maximum 8 programs	Maximum 8 programs	Maximum 8 programs
Video	Resolution	1920x1080P, 1920x1080i, 1280x720P, 720x576i, 720x480i, 480x576, 544x576, 640x576, 704x576	1920x1080P, 1920x1080i, 1280x720P, 720x576i, 720x480i, 480x576, 544x576, 640x576, 704x576
Video	Trans-coding	4 * MPEG2 HD → 4 * MPEG2/H.264 HD ; 4 * MPEG2 HD → 4 * MPEG2/H.264 SD ; 8 * MPEG2 SD → 8 * MPEG2/H.264 SD	4 * MPEG2 HD → 4 * MPEG2/H.264 HD ; 4 * MPEG2 HD → 4 * MPEG2/H.264 SD ; 8 * MPEG2 SD → 8 * MPEG2/H.264 SD

Video	Trans-coding	4* H.264 HD → 4*MP EG2/H.264 HD ; 4* H.264 HD → 4*MPEG 2/H.264 SD ; 8* H.264 SD → 8 *MPEG2/H.264 SD	4* H.264 HD → 4*MP EG2/H.264 HD ; 4* H.264 HD → 4*MPEG 2/H.264 SD ; 8* H.264 SD → 8 *MPEG2/H.264 SD
Video	Rate Control	CBR/VBR	CBR/VBR
Audio	Trans-coding	MPEG-1 Layer 2, AAC and AC3(Optional) any-to-any or pass through	MPEG-1 Layer 2, AAC and AC3(Optional) any-to-any or pass through
Audio	Sampling rate	48KHz	48KHz
Audio	Bit Rate	64Kbps-384Kbps	64Kbps-384Kbps
Stream Out	8*SPTS & 1*MPTS over UDP/RTP/RTSP, 1000M Base-T Ethernet Interface (UDP/RTP uni-cast / multicast) /SFP interface	8*SPTS & 1*MPTS over UDP/RTP/RTSP, 1000M Base-T Ethernet Interface (UDP/RTP uni-cast / multicast) /SFP interface	8*SPTS & 1*MPTS over UDP/RTP/RTSP, 1000M Base-T Ethernet Interface (UDP/RTP uni-cast / multicast) /SFP interface
Stream Out	1*ASI (as a copy of one of the 8 SPTS or the MPTS) output, BNC interface	1*ASI (as a copy of one of the 8 SPTS or the MPTS) output, BNC interface	1*ASI (as a copy of one of the 8 SPTS or the MPTS) output, BNC interface
System Function	LCD & Key board control; web NMS management	LCD & Key board control; web NMS management	LCD & Key board control; web NMS management
System Function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimensions	Dimensions	430mm×405mm×45m m(WxDxH)
General	Approx weight	Approx weight	4.8 Kg
General	Temperature range	Temperature range	0~45■(Operation), -20~80■(Storage)
General	Power requirements	Power requirements	AC 110V±10%, 50/60Hz or AC 220V±10%,50/60Hz
General	Power consumption	Power consumption	20W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227