

**FMUSER FUQ-4359B Bidirectional Video Transcoder 4 Tuner & 8
IP Inputs 8 SPTS-1 MPTS Outputs DVB-S-S2-C-T ISDB-T ATSC
H.264-MPEG2 MPEG-2 AVC AVC Broadcast Operators**



AC3 trans-coding
CC (Closed Caption)
BISS Descrambling for tuner input

Remarks: All H.264 mentioned in this sheet refers to MPEG-4 AVC/H.264.


Product overview

The FMUSER FUQ-4359B is a bidirectional transcoder converting video between H.264 and MPEG-2 formats, including HD to SD. It supports 4 tuner inputs with CAM/CI slots and IP input, outputting MPTS and SPTS via IP or ASI. Features BISS descrambling, CC, and web-based NMS management for broadcast systems requiring flexible format conversion.


Key feature

- Bidirectional Video Transcoding: Converts between H.264 and MPEG-2 for HD/SD resolutions.
- Flexible I/O Configuration: Supports 8 IP inputs, 4 tuner inputs with CAM/CI, outputs 8 SPTS and 1 MPTS via IP/ASI.
- Audio Processing: Handles LC-AAC, MP2, and AC3 with any-to-any conversion.
- Advanced Control: Features CBR/VBR rate control, BISS descrambling, and CC.
- Management System: Web-based NMS for monitoring and control.

Principle Chart

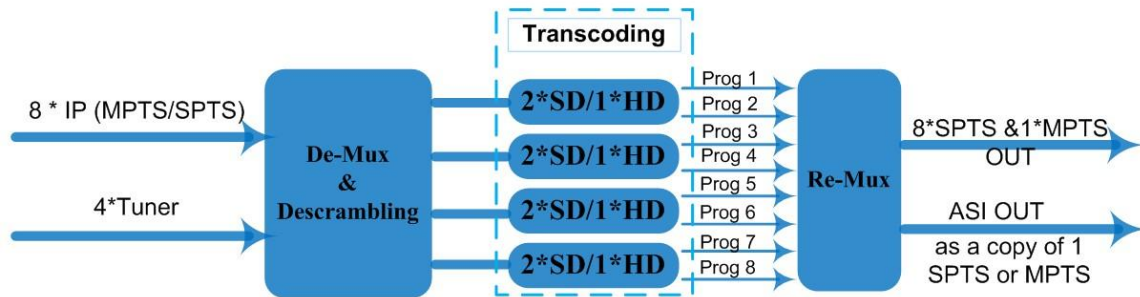

Transcoding Mode Example

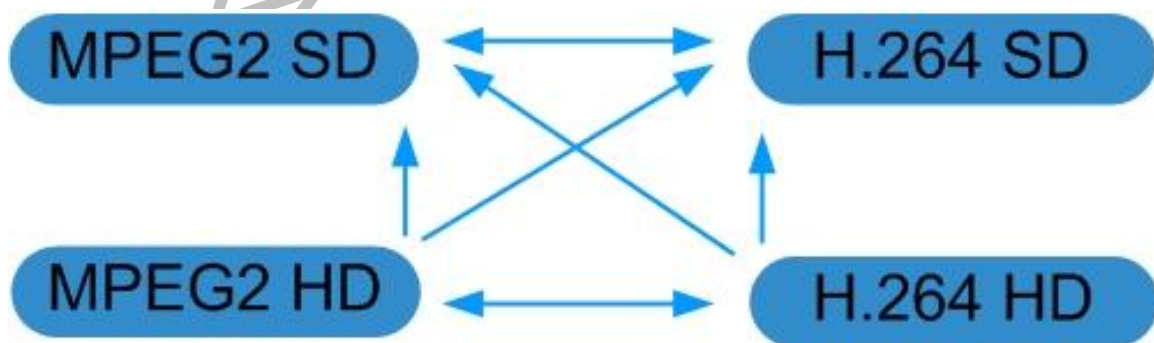

Technical Specifications

Stream In	MPTS/SPTS over UD P/RTP, 1000M Base-T Ethernet Interface/SFP interface	MPTS/SPTS over UD P/RTP, 1000M Base-T Ethernet Interface/SFP interface	MPTS/SPTS over UD P/RTP, 1000M Base-T Ethernet Interface/SFP interface
Stream In	4 * (DVB-S/S2/C/T/IS DB-T/ATSC Optional) Tuners	4 * (DVB-S/S2/C/T/IS DB-T/ATSC Optional) Tuners	4 * (DVB-S/S2/C/T/IS DB-T/ATSC Optional) Tuners
BISS Descramble	8 programs	8 programs	8 programs
Video	Resolution	1920x1080P, 1920x1080i, 1280x720P, 720x576i, 720x480i, 480x576, 544x576, 640x576, 704x576	1920x1080P, 1920x1080i, 1280x720P, 720x576i, 720x480i, 480x576, 544x576, 640x576, 704x576

Video	Trans-coding	4*MPEG2 HD → 4*MPEG2/H.264 HD ; 4*MPEG2 HD → 4*MPEG2/H.264 SD ; 8 *MPEG2 SD → 8 *MPEG2/H.264 SD	4*MPEG2 HD → 4*MPEG2/H.264 HD ; 4*MPEG2 HD → 4*MPEG2/H.264 SD ; 8 *MPEG2 SD → 8 *MPEG2/H.264 SD
Video	Trans-coding	4* H.264 HD → 4*MPEG2/H.264 HD ; 4* H.264 HD → 4*MPEG2/H.264 SD ; 8* H.264 SD → 8 *MPEG2/H.264 SD	4* H.264 HD → 4*MPEG2/H.264 HD ; 4* H.264 HD → 4*MPEG2/H.264 SD ; 8* H.264 SD → 8 *MPEG2/H.264 SD
Video	Rate Control	CBR/VBR	CBR/VBR
Audio	Trans-coding	MPEG-1 Layer 2, LC-AAC and AC3 any-to-any or pass through	MPEG-1 Layer 2, LC-AAC and AC3 any-to-any or pass through
Audio	Sampling rate	48KHz	48KHz
Audio	Bit Rate	64Kbps-384Kbps	64Kbps-384Kbps
Stream Out	8*SPTS & 1*MPTS over UDP/RTP/RTSP, 1000M Base-T Ethernet Interface (UDP/RTP uni-cast / multicast) /SFP interface	8*SPTS & 1*MPTS over UDP/RTP/RTSP, 1000M Base-T Ethernet Interface (UDP/RTP uni-cast / multicast) /SFP interface	8*SPTS & 1*MPTS over UDP/RTP/RTSP, 1000M Base-T Ethernet Interface (UDP/RTP uni-cast / multicast) /SFP interface
Stream Out	1*ASI (as a copy of one of the 8 SPTS or the MPTS) output, BNC interface	1*ASI (as a copy of one of the 8 SPTS or the MPTS) output, BNC interface	1*ASI (as a copy of one of the 8 SPTS or the MPTS) output, BNC interface
System Function	LCD & Key board control; web-based NMS management	LCD & Key board control; web-based NMS management	LCD & Key board control; web-based NMS management
System Function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimensions	Dimensions	430mm×405mm×45m m (WxDxH)
General	Approx weight	Approx weight	4.8 Kg
General	Temperature range	Temperature range	0~45■(Operation), -20~80■(Storage)

General	Power requirements	Power requirements	AC 200V-240V, 50/60Hz, 2A
General	Power consumption	Power consumption	20W

Order Information

Version	4* ASI or Tuner Input	6* ASI or Tuner Input	4* Tuner input	IP Input	CAM/CI
Simple Version (FU-4359B)	*				
Advanced Version (FU-4359)		*		*	
FU-4359A			*	*	*

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227