

FMUSER FUQ-44105R DVB-T Modulator 24-16 Tuner 256 IP 1 ASI Input 8 RF 8 IP Output EN300 744 QPSK-16QAM-64QAM BISS Descrambling For Digital Broadcasting Headend

Product overview




The FMUSER FUQ-44105R modulator processes 24/16 FTA DVB-S/S2/S2X tuner inputs, 256 IP inputs via GE ports, and ASI input. It performs multiplexing and DVB-T modulation to deliver 8 RF carriers and 8 IP MPTS streams. Controlled via web management with optional dual power supply, this rack-mountable device supports broadcast redundancy in digital terrestrial television systems.

FU-44105T is also characterized with high integrated level, high performance and low cost. It supports dual power supply (optional). This is very adaptable to newly generation broadcasting system.

Key feature

- Supports 24/16 FTA DVB-S/S2/S2X tuners, 256 UDP/RTP IP inputs, and ASI input
- Generates 8 non-adjacent DVB-T RF outputs with 8 mirrored IP MPTS streams
- Performs BISS descrambling (Version B), multiplexing, and PSI/SI editing
- Provides web-based control for configuration and monitoring
- Optional redundant power supply ensures continuous operation

Working Principle

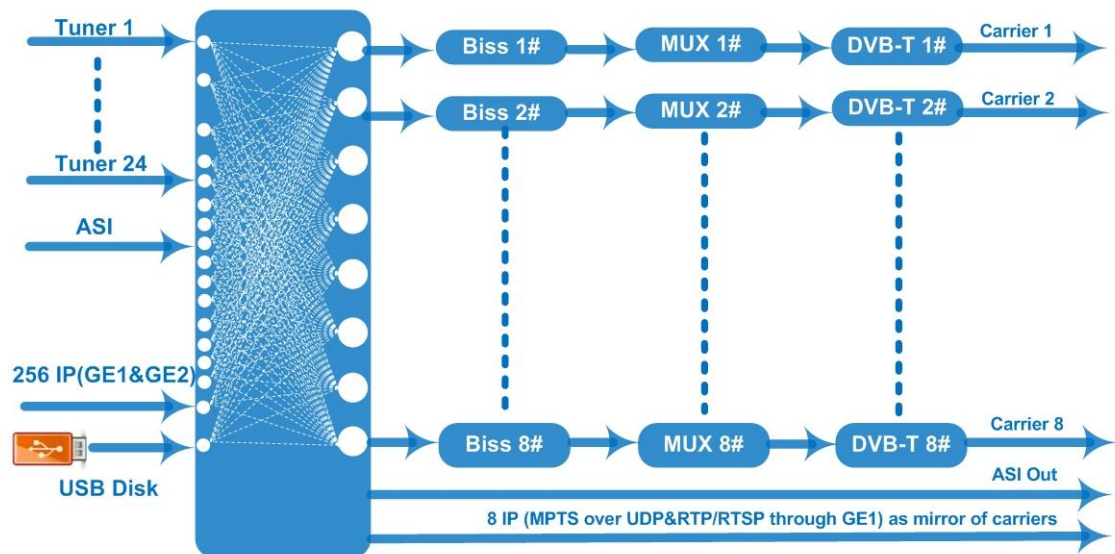

Specifications

Input	24 or 16 FTA DVB-S /-S2/-S2X Tuner input	24 or 16 FTA DVB-S /-S2/-S2X Tuner input	24 or 16 FTA DVB-S /-S2/-S2X Tuner input	24 or 16 FTA DVB-S /-S2/-S2X Tuner input	24 or 16 FTA DVB-S /-S2/-S2X Tuner input	24 or 16 FTA DVB-S /-S2/-S2X Tuner input
Input	256 IP (GE 1&GE2) input over UDP and RTP protocol	256 IP (GE 1&GE2) input over UDP and RTP protocol	256 IP (GE 1&GE2) input over UDP and RTP protocol	256 IP (GE 1&GE2) input over UDP and RTP protocol	256 IP (GE 1&GE2) input over UDP and RTP protocol	256 IP (GE 1&GE2) input over UDP and RTP protocol
Input	1 ASI input, BNC interface	1 ASI input, BNC interface	1 ASI input, BNC interface	1 ASI input, BNC interface	1 ASI input, BNC interface	1 ASI input, BNC interface
Input	TS files input and playing via the USB disk (FAT 32)	TS files input and playing via the USB disk (FAT 32)	TS files input and playing via the USB disk (FAT 32)	TS files input and playing via the USB disk (FAT 32)	TS files input and playing via the USB disk (FAT 32)	TS files input and playing via the USB disk (FAT 32)
Input	Tuners	DVB-S	DVB-S	DVB-S	Frequency In	950~2150 MHz
Input	Tuners	DVB-S	DVB-S	DVB-S	Symbol rate	0.5~45Mps
Input	Tuners	DVB-S	DVB-S	DVB-S	Signal Strength	- 65~-25dBm

Input	Tuners	DVB-S	DVB-S	DVB-S	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Input	Tuners	DVB-S	DVB-S	DVB-S	Constellation	QPSK
Input	Tuners	DVB-S	DVB-S	DVB-S	Max input bitrate	≤120 Mbps
Input	Tuners	DVB-S2	DVB-S2	DVB-S2	Frequency In	950~2150 MHz
Input	Tuners	DVB-S2	DVB-S2	DVB-S2	Symbol rate	QPSK/8PSK /16APSK : 0.5~45 Msp 32APSK: 0.5~40Msp;
Input	Tuners	DVB-S2	DVB-S2	DVB-S2	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8 PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 1 6APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Input	Tuners	DVB-S2	DVB-S2	DVB-S2	Constellation	QPSK, 8PSK, 16APSK, 32APSK
Input	Tuners	DVB-S2	DVB-S2	DVB-S2	Max input bitrate	≤120 Mbps

Input	Tuners	DVB-S2X	DVB-S2X	DVB-S2X	Frequency In	950-2150M Hz
Input	Tuners	DVB-S2X	DVB-S2X	DVB-S2X	Symbol rate	QPSK/8PSK /16APSK: 0.5~45 Mps 8APSK: K/32APSK: 0.5~40Mps
Input	Tuners	DVB-S2X	DVB-S2X	DVB-S2X	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10, 2/3-L, 32/45, 11/15, 7/9

Input	Tuners	DVB-S2X	DVB-S2X	DVB-S2X	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Input	Tuners	DVB-S2X	DVB-S2X	DVB-S2X	Max input bitrate	≤120 Mbps
Multiplexing	Maximum PID Remapping	Maximum PID Remapping	256 output per channel	256 output per channel	256 output per channel	256 output per channel
Multiplexing	Function	Function	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)
Multiplexing	Function	Function	A/V PID filtering (not for FU-44105T version B)	A/V PID filtering (not for FU-44105T version B)	A/V PID filtering (not for FU-44105T version B)	A/V PID filtering (not for FU-44105T version B)
Multiplexing	Function	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Modulation	Standard	Standard	EN300 744	EN300 744	EN300 744	EN300 744
Modulation	FFT	FFT	2K 4K 8K	2K 4K 8K	2K 4K 8K	2K 4K 8K
Modulation	Bandwidth	Bandwidth	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M
Modulation	Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Modulation	Guard interval	Guard interval	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32
Modulation	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	MER	MER	≥42 dB	≥42 dB	≥42 dB	≥42 dB

Modulation	RF out	RF out	8 non-adjacent carrier output	8 non-adjacent carrier output	8 non-adjacent carrier output	8 non-adjacent carrier output
Modulation	RF frequency	RF frequency	50~960MHz	50~960MHz	50~960MHz	50~960MHz
Modulation	RF output level	RF output level	-20~+10dBm, 0.1dB step	-20~+10dBm, 0.1dB step	-20~+10dBm, 0.1dB step	-20~+10dBm, 0.1dB step
Stream out	8 DVB-T RF output (F type interface)	8 DVB-T RF output (F type interface)	8 DVB-T RF output (F type interface)	8 DVB-T RF output (F type interface)	8 DVB-T RF output (F type interface)	8 DVB-T RF output (F type interface)
Stream out	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers 2 ASI output, one as mirror	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers 2 ASI output, one as mirror	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers 2 ASI output, one as mirror	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers 2 ASI output, one as mirror	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers 2 ASI output, one as mirror	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers 2 ASI output, one as mirror
System	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language
System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimension(W*D*H)	Dimension(W*D*H)	Dimension(W*D*H)	482mm×230mm×44mm	482mm×230mm×44mm	482mm×230mm×44mm
General	Temperature	Temperature	Temperature	0~45℃(Operation) ; -20~80℃(Storage)	0~45℃(Operation) ; -20~80℃(Storage)	0~45℃(Operation) ; -20~80℃(Storage)

General	Power	Power	Power	AC 100V±1 050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1 050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1 050/60Hz; AC 220V±10%, 50/60HZ
---------	-------	-------	-------	--	--	--

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227