

FMUSER FUQ-44105R V3 DVB-T Modulator 24-16 Tuner Inputs 128 IP 2 ASI Input Multi-Standard DVB-S-S2-S2X-C-T-T2-ISDB-T Input 8 DVB-T 8 IP 2 ASI Output Integrated Multiplexing PSI-SI Editing Broadcasting Headend

Product overview



The FMUSER FUQ-44105R V3 is a DVB-T modulator with 24/16 FTA tuner inputs for DVB-S/S2/S2X, DVB-C/T/T2, or ISDB-T, plus 128 IP inputs and 2 ASI inputs. It modulates signals into 8 non-adjacent DVB-T carriers and outputs 8 IP (MPTS) and 2 TS via ASI. Controlled via web management, this device supports multiplexing and PSI/SI editing. Ideal for broadcast, IPTV, and cable TV systems. FU-44105T is also characterized with high integrated level, high performance and low cost. This is very adaptable to a new generation broadcasting system.

Key feature

Integrated demodulating, re-multiplexing, BISS descrambling, and modulating in one unit.


Supports 4 tuner inputs for DVB-S/S2/S2X or DVB-C/T/T2/ISDB-T standards.

Provides 4 DVB-C RF or 2 DVB-T RF outputs for versatile distribution.

Enables PID pass-through for seamless program identifier transmission.

Features LCD/keyboard and web-based NMS for control and upgrades.

Working Principle

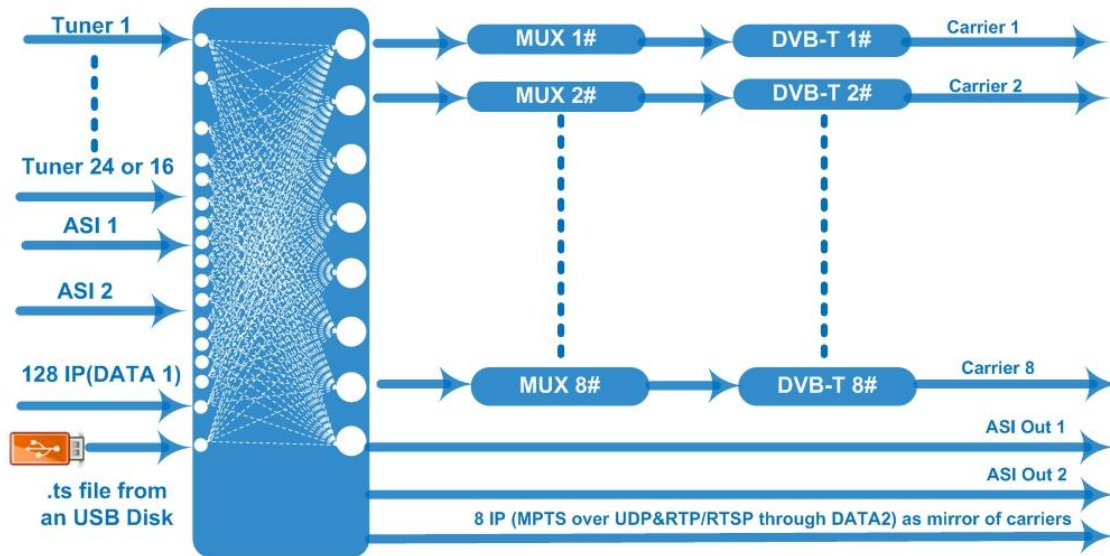

Specifications

Input	24 or 16 FTA DVB-S /-S2/-S2X or DVB-C/T /T2/ISDB-T Multi-Mode switchable tuner inputs	24 or 16 FTA DVB-S /-S2/-S2X or DVB-C/T /T2/ISDB-T Multi-Mode switchable tuner inputs	24 or 16 FTA DVB-S /-S2/-S2X or DVB-C/T /T2/ISDB-T Multi-Mode switchable tuner inputs	24 or 16 FTA DVB-S /-S2/-S2X or DVB-C/T /T2/ISDB-T Multi-Mode switchable tuner inputs	24 or 16 FTA DVB-S /-S2/-S2X or DVB-C/T /T2/ISDB-T Multi-Mode switchable tuner inputs	24 or 16 FTA DVB-S /-S2/-S2X or DVB-C/T /T2/ISDB-T Multi-Mode switchable tuner inputs
Input	128 IP inputs over UDP and RTP protocol	128 IP inputs over UDP and RTP protocol	128 IP inputs over UDP and RTP protocol	128 IP inputs over UDP and RTP protocol	128 IP inputs over UDP and RTP protocol	128 IP inputs over UDP and RTP protocol
Input	2 ASI inputs, BNC interface	2 ASI inputs, BNC interface	2 ASI inputs, BNC interface	2 ASI inputs, BNC interface	2 ASI inputs, BNC interface	2 ASI inputs, BNC interface
Input	TS files input by playing ts via the USB disk (FAT 32, USB 2.0)	TS files input by playing ts via the USB disk (FAT 32, USB 2.0)	TS files input by playing ts via the USB disk (FAT 32, USB 2.0)	TS files input by playing ts via the USB disk (FAT 32, USB 2.0)	TS files input by playing ts via the USB disk (FAT 32, USB 2.0)	TS files input by playing ts via the USB disk (FAT 32, USB 2.0)
Input	Tuner Option 1	DVB-S	DVB-S	DVB-S	Frequency In	950~2150 MHz

Input	Tuner Option 1	DVB-S	DVB-S	DVB-S	Symbol rate	0.5~45Mps
Input	Tuner Option 1	DVB-S	DVB-S	DVB-S	Signal Strength	-65~-25dBm
Input	Tuner Option 1	DVB-S	DVB-S	DVB-S	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Input	Tuner Option 1	DVB-S	DVB-S	DVB-S	Constellation	QPSK
Input	Tuner Option 1	DVB-S	DVB-S	DVB-S	Max input bitrate	≤120 Mbps
Input	Tuner Option 1	DVB-S2	DVB-S2	DVB-S2	Frequency In	950~2150 MHz
Input	Tuner Option 1	DVB-S2	DVB-S2	DVB-S2	Symbol rate	QPSK/8PSK /16APSK : 0.5~45 Mps 32APSK: 0.5~40Mps;
Input	Tuner Option 1	DVB-S2	DVB-S2	DVB-S2	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Input	Tuner Option 1	DVB-S2	DVB-S2	DVB-S2	Constellation	QPSK, 8PSK, 16APSK, 32APSK
Input	Tuner Option 1	DVB-S2	DVB-S2	DVB-S2	Max input bitrate	≤120 Mbps

Input	Tuner Option 1	DVB-S2X	DVB-S2X	DVB-S2X	Frequency In	950-2150MHz
Input	Tuner Option 1	DVB-S2X	DVB-S2X	DVB-S2X	Symbol rate	QPSK/8PSK /16APSK: 0.5~45 Mps 8PSK: K/32APSK: 0.5~40Mps
Input	Tuner Option 1	DVB-S2X	DVB-S2X	DVB-S2X	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10, 2/3-L, 32/45, 11/15, 7/9

Input	Tuner Option 1	DVB-S2X	DVB-S2X	DVB-S2X	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Input	Tuner Option 1	DVB-S2X	DVB-S2X	DVB-S2X	Max input bitrate	≤120 Mbps
Input	Tuner Option 2	DVB-C	DVB-C	DVB-C	Standard	J.83A(DVB-C), J.83B, J.83C
Input	Tuner Option 2	DVB-C	DVB-C	DVB-C	Frequency In	50~960MHz
Input	Tuner Option 2	DVB-C	DVB-C	DVB-C	Constellation	16/32/64/128/256 QAM
Input	Tuner Option 2	DVB-T/T2	DVB-T/T2	DVB-T/T2	Frequency In	50~960MHz
Input	Tuner Option 2	DVB-T/T2	DVB-T/T2	DVB-T/T2	Bandwidth	6/7/8 M bandwidth
Input	Tuner Option 2	ISDB-T	ISDB-T	ISDB-T	Frequency In	50~960MHz
Multiplexing	Maximum PID Remapping	Maximum PID Remapping	256 output per channel	256 output per channel	256 output per channel	256 output per channel
Multiplexing	Function	Function	PID remapping (automatically or manually)/ CA Filter	PID remapping (automatically or manually)/ CA Filter	PID remapping (automatically or manually)/ CA Filter	PID remapping (automatically or manually)/ CA Filter
Multiplexing	Function	Function	A/V PID filtering	A/V PID filtering	A/V PID filtering	A/V PID filtering
Multiplexing	Function	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Modulation	Standard	Standard	EN300 744	EN300 744	EN300 744	EN300 744
Modulation	FFT	FFT	2K 4K 8K	2K 4K 8K	2K 4K 8K	2K 4K 8K

Modulation	Bandwidth	Bandwidth	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M
Modulation	Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Modulation	Guard interval	Guard interval	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32
Modulation	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	MER	MER	≥40 dB	≥40 dB	≥40 dB	≥40 dB
Modulation	RF out	RF out	8 non-adjacent carrier output within 192MHz bandwidth	8 non-adjacent carrier output within 192MHz bandwidth	8 non-adjacent carrier output within 192MHz bandwidth	8 non-adjacent carrier output within 192MHz bandwidth
Modulation	RF frequency	RF frequency	50~960MHz	50~960MHz	50~960MHz	50~960MHz
Modulation	RF output level	RF output level	-20~+3dBm, 0.1dB step	-20~+3dBm, 0.1dB step	-20~+3dBm, 0.1dB step	-20~+3dBm, 0.1dB step
Stream out	8 DVB-T carriers output (F type interface)	8 DVB-T carriers output (F type interface)	8 DVB-T carriers output (F type interface)	8 DVB-T carriers output (F type interface)	8 DVB-T carriers output (F type interface)	8 DVB-T carriers output (F type interface)
Stream out	8 IP (MPTS) output over UDP and RTP/RTSP (DATA2, as mirror of carriers) 2 ASI outputs (2 TS as mirror)	8 IP (MPTS) output over UDP and RTP/RTSP (DATA2, as mirror of carriers) 2 ASI outputs (2 TS as mirror)	8 IP (MPTS) output over UDP and RTP/RTSP (DATA2, as mirror of carriers) 2 ASI outputs (2 TS as mirror)	8 IP (MPTS) output over UDP and RTP/RTSP (DATA2, as mirror of carriers) 2 ASI outputs (2 TS as mirror)	8 IP (MPTS) output over UDP and RTP/RTSP (DATA2, as mirror of carriers) 2 ASI outputs (2 TS as mirror)	8 IP (MPTS) output over UDP and RTP/RTSP (DATA2, as mirror of carriers) 2 ASI outputs (2 TS as mirror)
System	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)

System	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language
System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimension(W*D*H)	Dimension(W*D*H)	Dimension(W*D*H)	482mm×270mm×44mm	482mm×270mm×44mm	482mm×270mm×44mm
General	Temperature	Temperature	Temperature	0~45℃(Operation) ; -20~80℃(Storage)	0~45℃(Operation) ; -20~80℃(Storage)	0~45℃(Operation) ; -20~80℃(Storage)
General	Power	Power	Power	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ

Major Technical Comparison

FU-44105T	v1	v2	v3
LCD/KEY Feature	NO	NO	Yes
ASI inputs	2	1	2
ASI outputs	NO	2 for one TS	2 for two TS
Tuner inputs	16	16 or 24	16 or 24 (FTA DVB-S/S2/S2X or DVB-C/T/T2/ISDB-T Multi-Mode switchable tuner inputs with loop out)
RF loop out	Yes	No	Yes
IP outputs	1 MPTS output	8 MPTS output	8 MPTS output
USB	N/A	Playing TS	Playing TS
DATA Ports	IP inputs/outputs via GE1	IP inputs via DATA 1 IP outputs via DATA 2	IP inputs via DATA 1 IP outputs via DATA2
Reboot in Web after firmware upgrading	N/A	N/A	Yes

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227

FMUSER 广东艾盛