

FMUSER FUQ-44105R DVB-T Modulator 16 Tuner 256 IP 2 ASI Input 8 RF 8 IP Output GE-ASI Interface BISS Descrambling Multiplexing EN300744 Broadcasting Systems

Product overview



The FMUSER FUQ-44105R is a DVB-T modulator with 16 FTA tuner inputs, 256 IP inputs via GE1 & GE2, and 2 ASI ports, delivering 8 DVB-T RF outputs and 8 IP outputs. It processes signals through BISS descrambling (version B only), multiplexing, DVB-T modulation, PCR adjustment, and PSI/SI editing. Managed via web-based interface, this modulator is ideal for modern broadcasting systems, ensuring efficient signal distribution and integration. FU-44105T is also characterized with high integrated level, high performance and low cost. It supports dual power supply (optional). This is very adaptable to newly generation broadcasting system.

Key feature

Supports 16 FTA tuner inputs with standards including DVB-C, DVB-T, DVB-S/S2/S2X, ATSC, and ISDB-T.


Features 256 IP inputs and 2 ASI inputs via UDP and RTP protocols for flexible re-muxing.

Delivers 8 DVB-T RF outputs and 8 IP outputs with non-adjacent carriers and MPTS streams.

Includes BISS descrambling (version B only), multiplexing, DVB-T modulation, PCR adjustment, and PSI/SI editing.

Enables web-based management for remote control, updates, and monitoring.

Working Principle

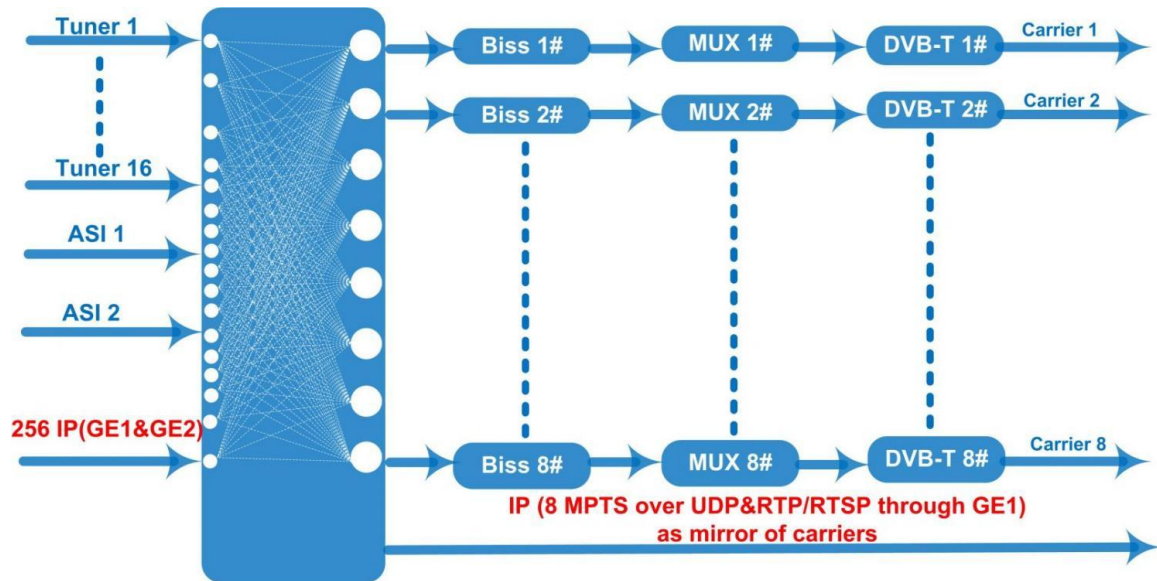

Specifications

Input	16 DVB-C (DVB-T/(T)/-S/S2/S2X, ATSC, ISDB-T optional) FTA Tuner (DVB-S2X is only for FU-44105T version B)	16 DVB-C (DVB-T/(T)/-S/S2/S2X, ATSC, ISDB-T optional) FTA Tuner (DVB-S2X is only for FU-44105T version B)	16 DVB-C (DVB-T/(T)/-S/S2/S2X, ATSC, ISDB-T optional) FTA Tuner (DVB-S2X is only for FU-44105T version B)	16 DVB-C (DVB-T/(T)/-S/S2/S2X, ATSC, ISDB-T optional) FTA Tuner (DVB-S2X is only for FU-44105T version B)	16 DVB-C (DVB-T/(T)/-S/S2/S2X, ATSC, ISDB-T optional) FTA Tuner (DVB-S2X is only for FU-44105T version B)	16 DVB-C (DVB-T/(T)/-S/S2/S2X, ATSC, ISDB-T optional) FTA Tuner (DVB-S2X is only for FU-44105T version B)
Input	256 IP (GE 1&GE2) input over UDP and RTP protocol	256 IP (GE 1&GE2) input over UDP and RTP protocol	256 IP (GE 1&GE2) input over UDP and RTP protocol	256 IP (GE 1&GE2) input over UDP and RTP protocol	256 IP (GE 1&GE2) input over UDP and RTP protocol	256 IP (GE 1&GE2) input over UDP and RTP protocol
Input	2 ASI input, BNC interface	2 ASI input, BNC interface	2 ASI input, BNC interface	2 ASI input, BNC interface	2 ASI input, BNC interface	2 ASI input, BNC interface
Tuner Section		DVB-C	DVB-C	DVB-C	Standard	J.83A(DVB -C), J.83B, J.83C
Tuner Section		DVB-C	DVB-C	DVB-C	Frequency In	60~890MH z

Tuner Section		DVB-C	DVB-C	DVB-C	Constellation	16/32/64/128/256 QAM
Tuner Section		DVB-T/(T)	DVB-T/(T)	DVB-T/(T)	Frequency In	60~890MHz
Tuner Section		DVB-T/(T)	DVB-T/(T)	DVB-T/(T)	Bandwidth	6/7/8 M bandwidth
Tuner Section		ISDB-T	ISDB-T	ISDB-T	Frequency In	60~890MHz
Tuner Section	Version 1	DVB-S/S2	DVB-S/S2	DVB-S/S2	Frequency In	950~2150 MHz
Tuner Section	Version 1	DVB-S/S2	DVB-S/S2	DVB-S/S2	Symbol rate	QPSK 1~45 Mbauds 8PSK 1~45 Mbauds
Tuner Section	Version 1	DVB-S/S2	DVB-S/S2	DVB-S/S2	Code rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	Version 1	DVB-S/S2	DVB-S/S2	DVB-S/S2	Constellation	QPSK, 8PSK
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S	DVB-S	DVB-S	Frequency In	950~2150 MHz
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S	DVB-S	DVB-S	Symbol rate	0.5~45 Msp/s
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S	DVB-S	DVB-S	Signal Strength	-65~-25dBm
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S	DVB-S	DVB-S	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S	DVB-S	DVB-S	Constellation	QPSK

Tuner Section	Version 2 (For FU-44105T version B)	DVB-S	DVB-S	DVB-S	Max input bitrate	≤120 Mbps
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S2	DVB-S2	DVB-S2	Frequency In	950~2150 MHz
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S2	DVB-S2	DVB-S2	Symbol rate	QPSK/8PSK: /16APSK: 0.5~45 Msp/s 32APSK: 0.5~40Msp/s;
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S2	DVB-S2	DVB-S2	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S2	DVB-S2	DVB-S2	Constellation	QPSK, 8PSK, 16APSK, 32APSK

Tuner Section	Version 2 (For FU-44105T version B)	DVB-S2	DVB-S2	DVB-S2	Max input bitrate	≤120 Mbps
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S2X	DVB-S2X	DVB-S2X	Frequency In	950-2150M Hz
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S2X	DVB-S2X	DVB-S2X	Symbol rate	QPSK/8PSK /16APSK: 0.5~45 Mps 8APS K/32APSK: 0.5~40Mps s

Tuner Section	Version 2 (For FU-44105T version B)	DVB-S2X	DVB-S2X	DVB-S2X	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10, 2/3-L, 32/45, 11/15, 7/9
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S2X	DVB-S2X	DVB-S2X	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Tuner Section	Version 2 (For FU-44105T version B)	DVB-S2X	DVB-S2X	DVB-S2X	Max input bitrate	≤120 Mbps
Tuner Section		ATSC	ATSC	ATSC	Frequency In	30~1000M Hz

Tuner Section		ATSC	ATSC	ATSC	Bandwidth	6M
Tuner Section		ATSC	ATSC	ATSC	Constellation	8VSB
BISS Descrambling	Mode 1, Mode E (descramble individual program) (only for FU-44105T version B)	Mode 1, Mode E (descramble individual program) (only for FU-44105T version B)	Mode 1, Mode E (descramble individual program) (only for FU-44105T version B)	Mode 1, Mode E (descramble individual program) (only for FU-44105T version B)	Mode 1, Mode E (descramble individual program) (only for FU-44105T version B)	Mode 1, Mode E (descramble individual program) (only for FU-44105T version B)
Multiplexing	Maximum PID Remapping	Maximum PID Remapping	256 output per channel	256 output per channel	256 output per channel	256 output per channel
Multiplexing	Function	Function	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)
Multiplexing	Function	Function	A/V PID filtering (not for FU-44105T version B)	A/V PID filtering (not for FU-44105T version B)	A/V PID filtering (not for FU-44105T version B)	A/V PID filtering (not for FU-44105T version B)
Multiplexing	Function	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Modulation	Standard	Standard	EN300 744	EN300 744	EN300 744	EN300 744
Modulation	FFT	FFT	2K 4K 8K	2K 4K 8K	2K 4K 8K	2K 4K 8K
Modulation	Bandwidth	Bandwidth	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M
Modulation	Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Modulation	Guard interval	Guard interval	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32

Modulation	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	MER	MER	≥42 dB	≥42 dB	≥42 dB	≥42 dB
Modulation	RF out	RF out	8 non-adjacent carrier output	8 non-adjacent carrier output	8 non-adjacent carrier output	8 non-adjacent carrier output
Modulation	RF frequency	RF frequency	50~960MHz	50~960MHz	50~960MHz	50~960MHz
Modulation	RF output level	RF output level	-20~+10dBm, 0.1dB step	-20~+10dBm, 0.1dB step	-20~+10dBm, 0.1dB step	-20~+10dBm, 0.1dB step
Stream out	8 DVB-T RF output (F type interface)	8 DVB-T RF output (F type interface)	8 DVB-T RF output (F type interface)	8 DVB-T RF output (F type interface)	8 DVB-T RF output (F type interface)	8 DVB-T RF output (F type interface)
Stream out	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers	8 IP (MPTS) output over UDP and RTP/RTSP (GE1 only), as mirror of carriers
System	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language
System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimension(W*D*H)	Dimension(W*D*H)	Dimension(W*D*H)	482mm×300mm×44.5mm	482mm×300mm×44.5mm	482mm×300mm×44.5mm
General	Temperature	Temperature	Temperature	0~45℃(Operation) ; -20~80℃(Storage)	0~45℃(Operation) ; -20~80℃(Storage)	0~45℃(Operation) ; -20~80℃(Storage)

General	Power	Power	Power	AC 100V±1 050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1 050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1 050/60Hz; AC 220V±10%, 50/60HZ
---------	-------	-------	-------	--	--	--

Order Guide

	FU-44105T	FU-44105T (version B)	FU-44105C
DVB-S2X tuner in	×	√	√
Biss descrambling	×	√	×
Scrambling	×	×	√
A/V PID filtering	√	×	×
IP Input	256	256	512
IP Output	8 MPTS	8 MPTS	1 MPTS

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)