

FMUSER FUQ-4415B DVB-T Modulator 128 IP Inputs 4 Non-Adjacent RF Outputs UDP-RTP DVB-T EN300744 Multiplexing Modulation for DTV Systems *Product overview*




The FMUSER FUQ-4415B is a DVB-T modulator with 128 IP inputs over UDP/RTP and outputs 4 DVB-T carriers and 4 MPTS streams. It integrates multiplexing and modulating functions for efficient signal processing. Features web-based NMS management for easy control. Ideal for DTV broadcasting systems, providing reliable transmission in modern headend setups.

Key feature

Enables web-based NMS management for monitoring and configuration.

Principle Chart

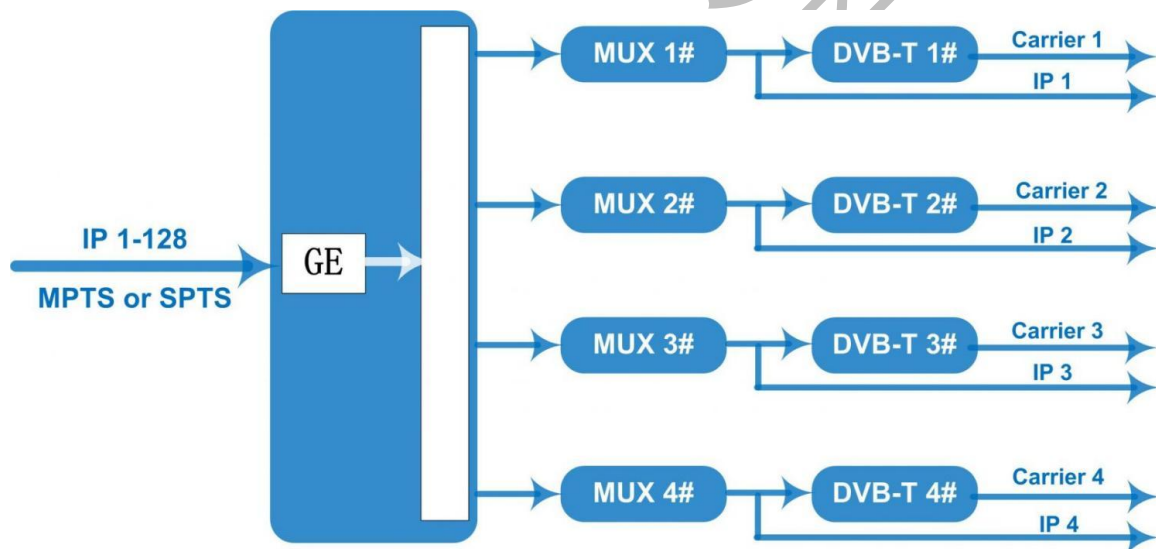

Specifications

Input	128 IP(SPTS/MPTS) input over UDP and RTP, RJ45, 1000M/100M, Unicast/Multicast	128 IP(SPTS/MPTS) input over UDP and RTP, RJ45, 1000M/100M, Unicast/Multicast	128 IP(SPTS/MPTS) input over UDP and RTP, RJ45, 1000M/100M, Unicast/Multicast
Multiplexing	Maximum PID Remapping	256 per input channel	256 per input channel
Multiplexing	Function	PID Remapping	PID Remapping
Multiplexing	Function	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Modulation	DVB-T	Standard	EN300744
Modulation	DVB-T	FFT mode	2K
Modulation	DVB-T	Bandwidth	6M, 7M, 8M
Modulation	DVB-T	Constellation	QPSK, 16QAM, 64QAM
Modulation	DVB-T	Guard Interval	1/4, 1/8, 1/16, 1/32
Modulation	DVB-T	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	DVB-T	MER	≥42 dB
Modulation	DVB-T	RF frequency	50~960MHz, 1KHz step
Modulation	DVB-T	RF out	1 RF port
Modulation	DVB-T	RF out	4*DVB-T non-adjacent carriers combined output , 40M total bandwidth limitation
Modulation	DVB-T	RF output level	-28~ -3 dBm, 0.1db step
Stream Out	4*MPTS over UDP and RTP out (RJ45, 1000M/100M Unicast/Multicast)	4*MPTS over UDP and RTP out (RJ45, 1000M/100M Unicast/Multicast)	4*MPTS over UDP and RTP out (RJ45, 1000M/100M Unicast/Multicast)
System	LCD/Keyboard operating and web-based NMS support	LCD/Keyboard operating and web-based NMS support	LCD/Keyboard operating and web-based NMS support

System	Ethernet software upgrading	Ethernet software upgrading	Ethernet software upgrading
General	Dimension (W*D*H)	482mm×300mm×44.5 mm	482mm×300mm×44.5 mm
General	Temperature	0~45■(Operation) ; -20~80■(Storage)	0~45■(Operation) ; -20~80■(Storage)
General	Power supply	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227