

FMUSER FUQ-4417J ISDB-T Modulator 24-48 Channels IP to RF Conversion 1024 IP Input ARIB STD-B31 Web-Based NMS Digital TV Broadcast Systems




Product Overview

The FMUSER FUQ-4417J is a high-density ISDB-T modulator converting IP streams to 24/48 RF carriers (50-960MHz) through 4xRJ45 and 2xSFP ports. It processes transport streams with PID remapping and PCR correction, featuring web-based control and 1U rack-mount design. Ideal for digital TV headends, cable network upgrades, and multiscreen distribution systems requiring simultaneous RF/IP output.


Key feature

Centralized management via web-based NMS with real-time monitoring

Inner Principle Chart - (24 carriers out per daughter card):

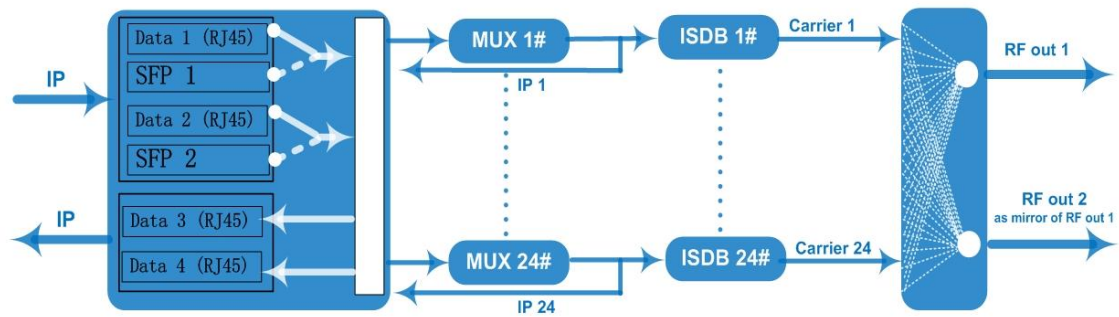

Carrier Setting Illustration

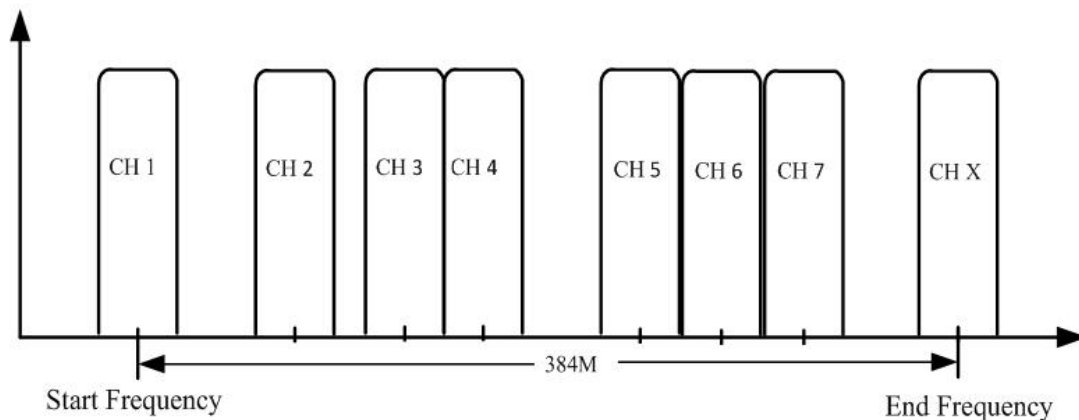

Specifications

Input	Input	Max 1024 IP input through data ports 1 & 2 ■ 100/1000M Ethernet Ports per daughter card (RJ45 and SFP interface alternative)
Input	Transport Protocol	TS over UDP/RTP, unicast and multicast, IGMP V2/V3
Input	Transmission Rate	Max 840Mbps for each GE input
Mux	Input Channel	1024 IP streams
Mux	Output Channel	24 (or 48)
Mux	Max PIDs	256 per channel
Mux	Functions	PID remapping (auto/manually optional)
Mux	Functions	PCR accurate adjusting

Mux	Functions	PSI/SI table automatically generating
Modulation Parameters	Standard	ARIB STD-B31
Modulation Parameters	Bandwidth	6M
Modulation Parameters	Constellation	QPSK, 16QAM, 64QAM
Modulation Parameters	Guard Interval	1/32, 1/16, 1/8, 1/4
Modulation Parameters	Transmission Mode	2K, 4K, 8K
Modulation Parameters	Code rate	1/2, 2/3, 3/4, 5/6, 7/8
Modulation Parameters	MER	≥40dB
Modulation Parameters	RF frequency	50~960MHz, 1KHz step
Modulation Parameters	RF output level	-20dBm~+10dBm(87~117dbμV), 0.1dB stepping
Modulation Parameters	Output Channel	24 (or 48) non-adjacent carriers output
RF Output	Interface	2 F type port mirror out, 75Ω impedance - 24ch model 4 F type port (with 2 ports located in each daughter card), 75Ω impedance - 48ch model
RF Output	ACLR	-50 dBc
IP output	24 (or 48) IP output over UDP/RTP/RTSP through data ports 3&4, unicast/multicast, 100/1000M Ethernet Ports	24 (or 48) IP output over UDP/RTP/RTSP through data ports 3&4, unicast/multicast, 100/1000M Ethernet Ports
System	Web-based NMS management	Web-based NMS management
General	Demission	480mm×327mm×44.5mm (W×L×H)
General	Weight	5.5kg
General	Temperature	0~45℃(operation), -20~80℃(storage)
General	Power Supply	AC 100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz

Order Guide

	24ch Model	48ch Model
--	------------	------------

1024 IP input to 24ch ISDB-T carriers out, 24 IP out (with single card)	x	
1024 x2 IP input to 24ch x2 ISDB-T carriers out, 24 x2 IP out (with two daughter cards)		x
10G Ethernet	As per order	As per order
Dual Power Supply	As per order	As per order

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227