

FMUSER FUQ-4419BX ATSC Modulator 256 IP Inputs 8 RF Outputs GE Ports ATSC A-53 8VSB RS(208-188) Encoding Multiplexing Web-Based Control for Broadcasting and STB Testing

Product Overview




The FMUSER FUQ-4419BX is an ATSC modulator supporting up to 256 IP inputs via three GE ports and delivering 8 RF output channels. It performs multiplexing and modulation compliant with ATSC A/53, including 8VSB and RS(208,188) encoding, with web-based network management for control. Ideal for ATSC broadcasting network setup and set-top box testing.


Key feature

- Supports high-capacity IP input with up to 256 streams via three GE ports
- Provides robust ATSC modulation compliant with ATSC A/53, featuring 8VSB and RS(208,188) encoding
- Enables advanced signal processing including PID remapping and PSI/SI editing
- Features web-based network management for remote control and monitoring

Inner Principle Chart

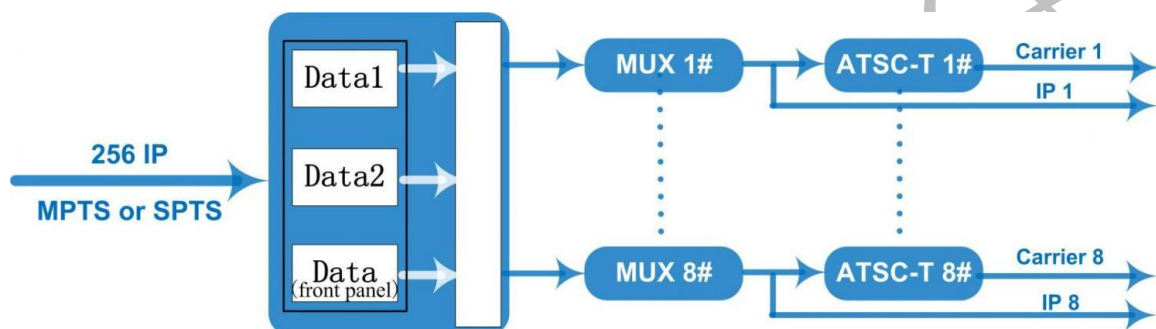

Carrier Setting Illustration

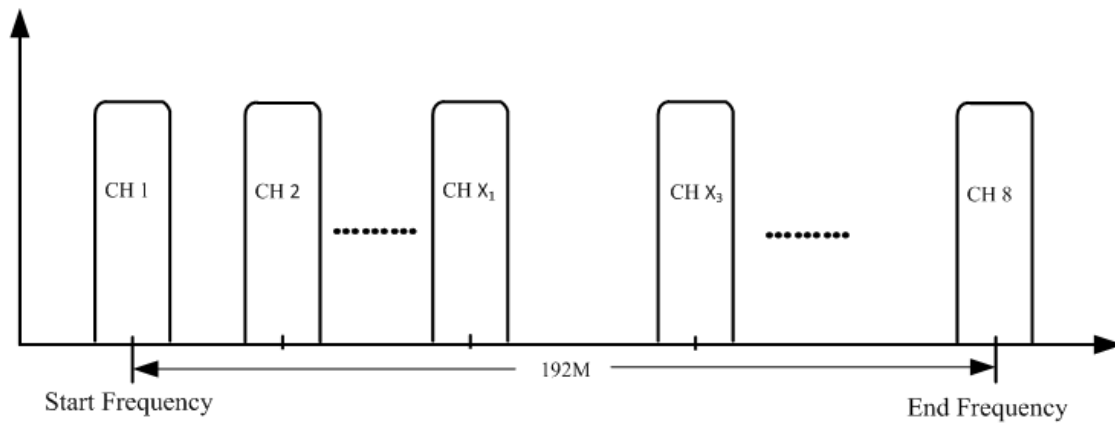

Specifications

Input	Input	Max 256 IP input through 3 (front-panel Data port, Data 1 and Data 2) 100/1000M Ethernet Port (SFP interface optional). Each Data1 or Data 2 port can input max 256 IP, while front-panel Data port can input max 128 IP
Input	Transport Protocol	TS over UDP/RTP, unicast and multicast, IGMP V2/V3
Input	Transmission Rate	Max 840Mbps for each input channel
Mux	Input Channel	256
Mux	Output Channel	8
Mux	Max PIDs	180 per channel
Mux	Functions	PID remapping(auto/manually optional)
Mux	Functions	PCR accurate adjusting
Mux	Functions	PSI/SI table automatically generating
Modulation Parameters	Channel	8
Modulation Parameters	Modulation Standard	ATSC A/53
Modulation Parameters	Constellation	8VSB
Modulation Parameters	Bandwidth	6MHz
Modulation Parameters	FEC	RS(208 188)+Trellis

RF Output	Interface	F typed output port for 8 non-adjacent carriers
RF Output	RF Range	50~960MHz, 1kHz stepping
RF Output	Output Level	-20~+10dbm (for all carriers), 0.5db stepping
RF Output	MER	≥ 40dB
RF Output	ACL	-55 dBc
TS output	8 IP output over UDP/RTP/RTSP, unicast/multicast, 2 100/1000M Ethernet Ports	8 IP output over UDP/RTP/RTSP, unicast/multicast, 2 100/1000M Ethernet Ports
System	Web-based Network management	Web-based Network management
General	Demission	420mm×440mm×44.5mm (WxLxH)
General	Weight	3kg
General	Temperature	0~45■(operation), -20~80■(storage)
General	Power Supply	AC 100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz
General	Consumption	≤20W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227