

FMUSER FUQ-4419R V2 DVB-T Modulator 8-16 Carriers 1024 IP Inputs 6 ASI Inputs ETSI EN300 744 PID Remapping Web-Based Management for DTV Headends Product Overview



The FMUSER FUQ-4419R (V2) is a high-density DVB-T modulator converting IP inputs to RF outputs. It processes signals via modulation with inputs including max 1024 IP streams through 4 GE/SFP ports and 6 ASI inputs. Controlled through web-based management for seamless operation. Ideal for next-generation DTV broadcasting systems and cable headends.

Key feature

Supports high-capacity input with up to 1024 IP streams via 4 GE/SFP ports and 6 ASI inputs.


Delivers flexible modulation for 8 or 16 DVB-T carriers compliant with ETSI EN300 744.

Enables advanced processing including PID remapping, PCR adjustment, and PSI/SI editing.


Features web-based management for easy configuration and monitoring.

Inner Principle Chart


For 8 carriers out:

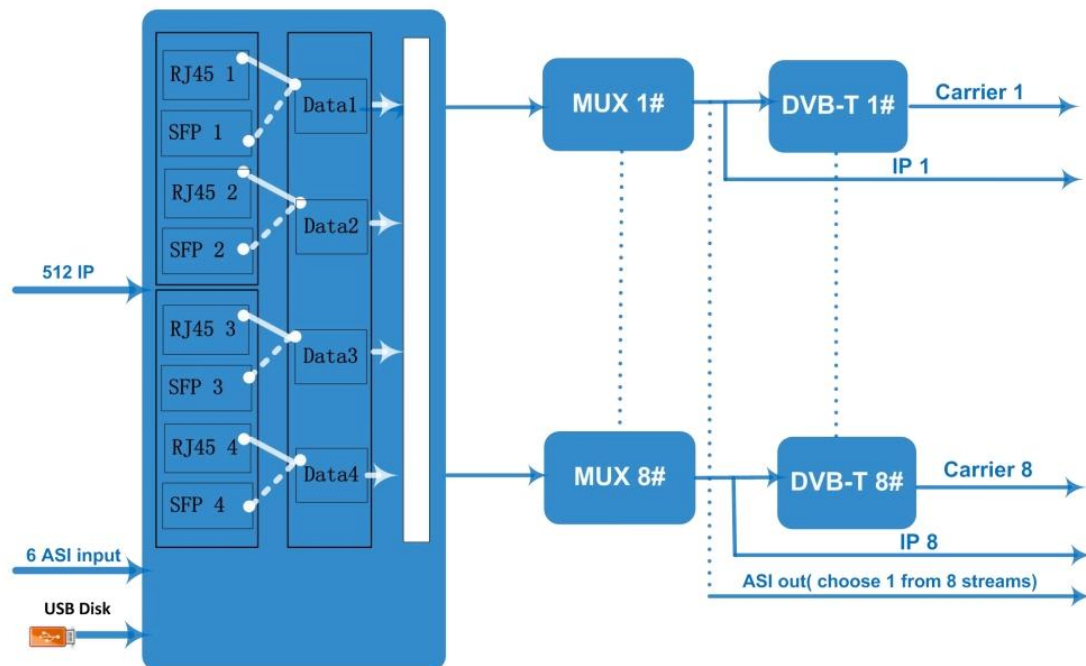

For 16 carriers out:

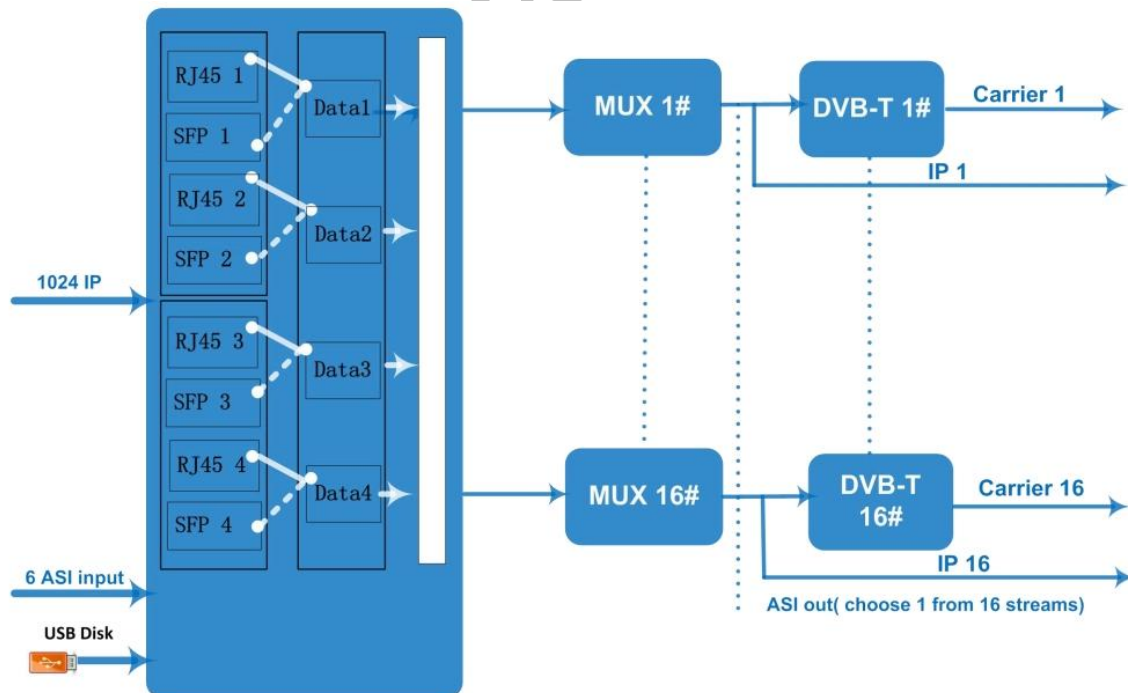

Carrier Setting Illustration:

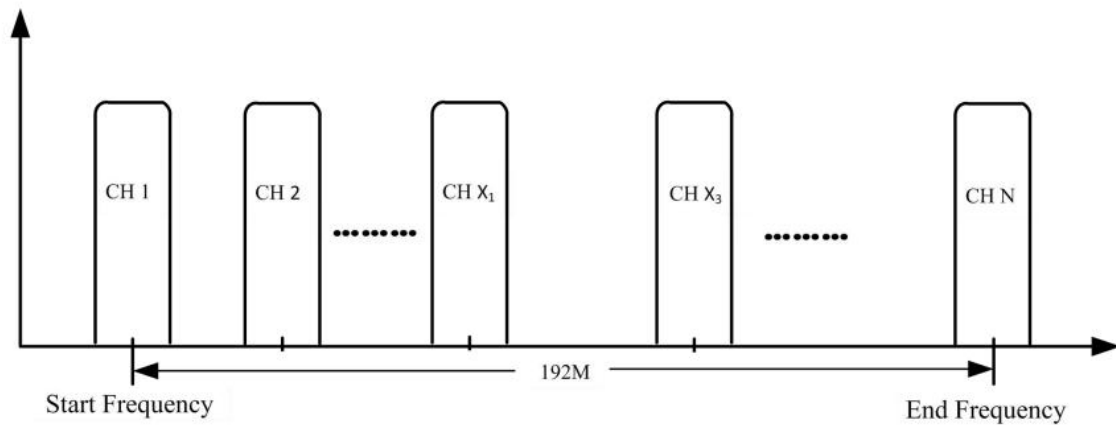

Specifications

Input	Input	8 DVB-T carriers: Max 512 IP input through Date1-Date4 100/1000M Ethernet Port (or SFP interface optional). Each Data port can input max 512 IP. 16 DVB-T carriers: Max 1024 IP input through Date1-Date4 100/1000M Ethernet Port (or SFP interface optional). Each Data port can input max 1024 IP.
Input	Input	6 ASI input, BNC interface
Input	Transport Protocol	TS over UDP/RTP, unicast and multicast, IGMP V2/V3
Input	Transmission Rate	Max 840Mbps for each input channel
Mux	Input Channel	512(or 1024)
Mux	Output Channel	8 (or 16)
Mux	Max PIDs	256 per channel
Mux	Functions	PID remapping(auto/manually optional)
Mux	Functions	PCR accurate adjusting
Mux	Functions	PSI/SI table automatically generating

Modulation Parameters	Channel	8(or 16)
Modulation Parameters	Modulation Standard	ETSI EN300 744
Modulation Parameters	Constellation	QPSK/16QAM/64QAM
Modulation Parameters	Bandwidth	6/7/8 MHz
Modulation Parameters	Trans mode	2K/4K/8K
Modulation Parameters	FEC	1/2,2/3,3/4,5/6,7/8
RF Output	Interface	F typed output port for8(or 16) non-adjacent carriers
RF Output	RF Range	50~960MHz, 1kHz stepping
RF Output	Output Level	-20~+10dbm(for all carriers), 0.5db stepping
RF Output	MER	≥ 40dB
RF Output	ACL	-55 dBc
TS output	8 (or 16) IP output over UDP/RTP/RTSP, unicast/multicast, Data1 100/1000M Ethernet Ports	8 (or 16) IP output over UDP/RTP/RTSP, unicast/multicast, Data1 100/1000M Ethernet Ports
TS output	2 ASI output, one as mirror	2 ASI output, one as mirror
System	Web-based Network management	Web-based Network management
General	Demission	420mm×440mm×44.5mm (WxLxH)
General	Temperature	0~45■(operation), -20~80■(storage)
General	Power Supply	AC100V±10%, 50/60Hz or AC 220V±10%,50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227