

FMUSER FUQ-4419U DVB-T Modulator 256-512-768 IP Input to 8-16-24 RF Output GE-SFP Interface TS over UDP-RTP QPSK-16QAM-64QAM ETSI EN300 744 PID Remapping PSI-SI Editing Digital TV Broadcasting Cable Headend IPTV Product Overview



The FMUSER FUQ-4419R is a DVB-T modulator that accepts up to 768 IP inputs via GE/SFP ports and outputs 8, 16, or 24 non-adjacent RF carriers (50-960MHz). It processes IP streams through multiplexing and modulation into DVB-T compliant signals. With high integration, low cost, and web-based network management, this device is ideal for digital TV broadcasting, cable headends, and IPTV systems.

Key feature


Supports up to 768 IP inputs via GE/SFP ports with max 840Mbps per input.

Features PID remapping, PSI/SI editing, and outputs DVB-T carriers compliant with ETSI EN300 744.


Enables web-based network management for easy configuration and monitoring.

Inner Principle Chart


Version I & II - For 8&16 carriers out):

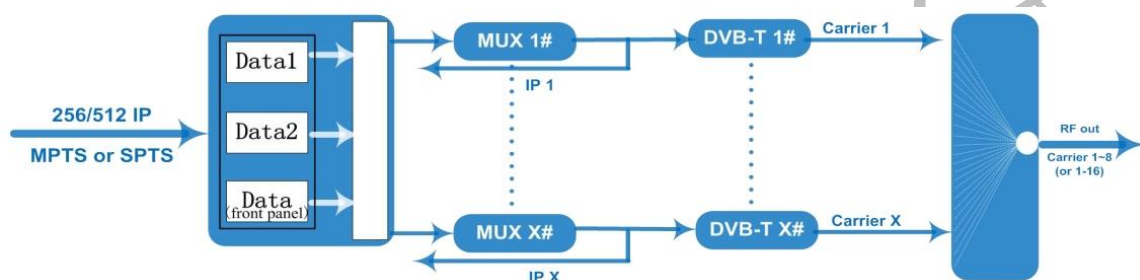

Version III - For 24 carriers out)::

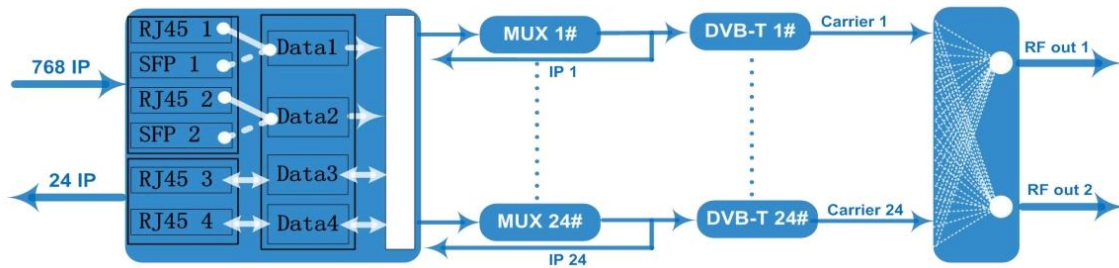

Carrier Setting Illustration

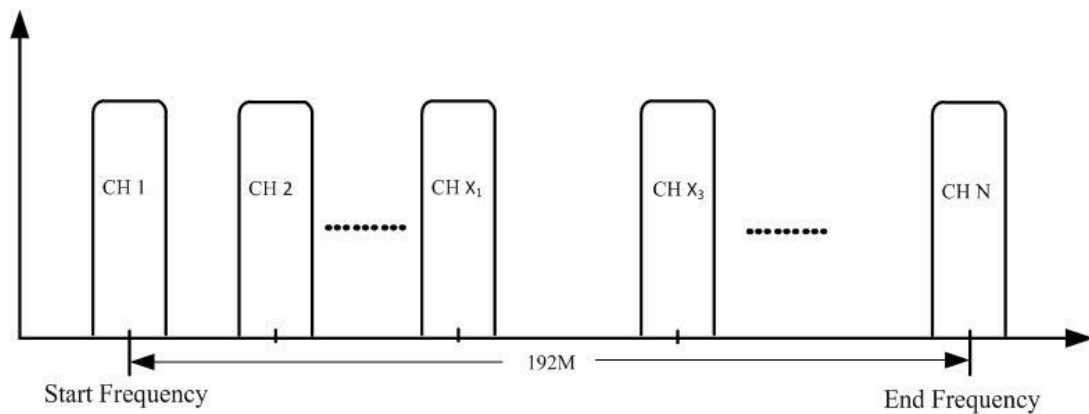

Specifications

Input	Input	Max 256/512 IP input through 3 (front-panel Data port, Data 1 and Data 2) 100/1000M Ethernet Port (SFP interface optional). - For Version I & II Max 768 IP input through data ports 1 to 4 100/1000M Ethernet Ports (RJ45 and SFP interface alternative). -For Version III
Input	Transport Protocol	TS over UDP/RTP, unicast and multicast, IGMP V2/V3
Input	Transmission Rate	Max 840Mbps for each input channel
Mux	Input Channel	256 IP streams - Version I 512 IP streams - Version II 768 IP streams - Version III
Mux	Output Channel	8 (or 16, or 24)

Mux	Max PIDs	180 per channel
Mux	Functions	PID remapping(auto/manually optional)
Mux	Functions	PCR accurate adjusting
Mux	Functions	PSI/SI table automatically generating
Modulation Parameters	Output Channel	8 non-adjacent carriers output - Version I 16 non-adjacent carriers output - Version II 24 non-adjacent carriers output - Version III
Modulation Parameters	Modulation Standard	ETSI EN300 744
Modulation Parameters	Constellation	QPSK/16QAM/64QAM
Modulation Parameters	Bandwidth	6/7/8 MHz
Modulation Parameters	Trans mode	2K/4K/8K
Modulation Parameters	FEC	1/2, 2/3, 3/4, 5/6, 7/8
RF Output	Interface	F typed output port for 8 (or 16) non-adjacent carriers
RF Output	RF Range	50~960MHz, 1kHz stepping
RF Output	Output Level	-20~+10dbm (for all carriers), 0.5db stepping
RF Output	MER	≥ 40dB
RF Output	ACL	-55 dBc
TS output	8 (or 16, or 24) IP output over UDP/RTP/RTSP, unicast/multicast, 2 100/1000M Ethernet Ports	8 (or 16, or 24) IP output over UDP/RTP/RTSP, unicast/multicast, 2 100/1000M Ethernet Ports
System	Web-based Network management	Web-based Network management
General	Demission	420mm×440mm×44.5mm (W×L×H)
General	Temperature	0~45℃(operation), -20~80℃(storage)
General	Power Supply	AC 100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz

Order Guide:

	Version I	Version II	Version III
256 IP input to 8ch DVB-T carriers out, 8 IP out	x		
512 IP input to 16ch DVB-T carriers out, 16 IP out		x	
768 IP input to 24ch DVB-T carriers out, 24 IP out			x

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)