

FMUSER FUQ-4443 V2 IP QAM Modulator 1024 IP + 6 ASI Inputs 16-32 DVB-C Outputs IP-ASI-RF Interfaces ITU-T J.83 A-B Multiplexing Scrambling for Cable Headends Hotel IPTV

Product Overview




The FMUSER FUQ-4443 (V2) is an IP QAM modulator with inputs via 4 GE/SFP ports for up to 1024 IP streams and 6 ASI inputs. It processes signals by modulating them into 16 or 32 non-adjacent DVB-C carriers. Featuring web-based network management, this device is ideal for cost-effective DTV broadcasting systems.

Key feature


Enables web-based network management for remote monitoring and control.

Principle Chart


For 16 carriers out:

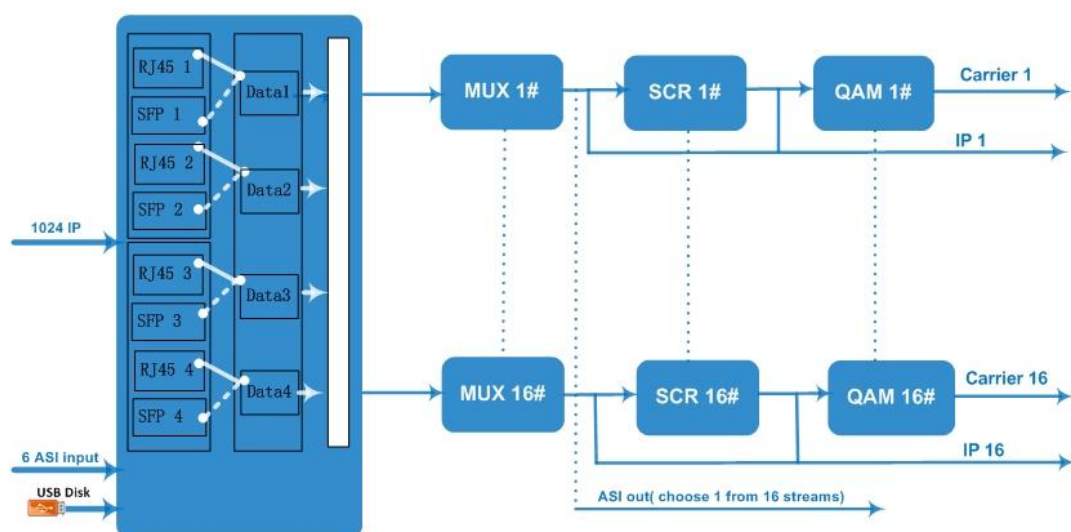

For 32 carriers out:

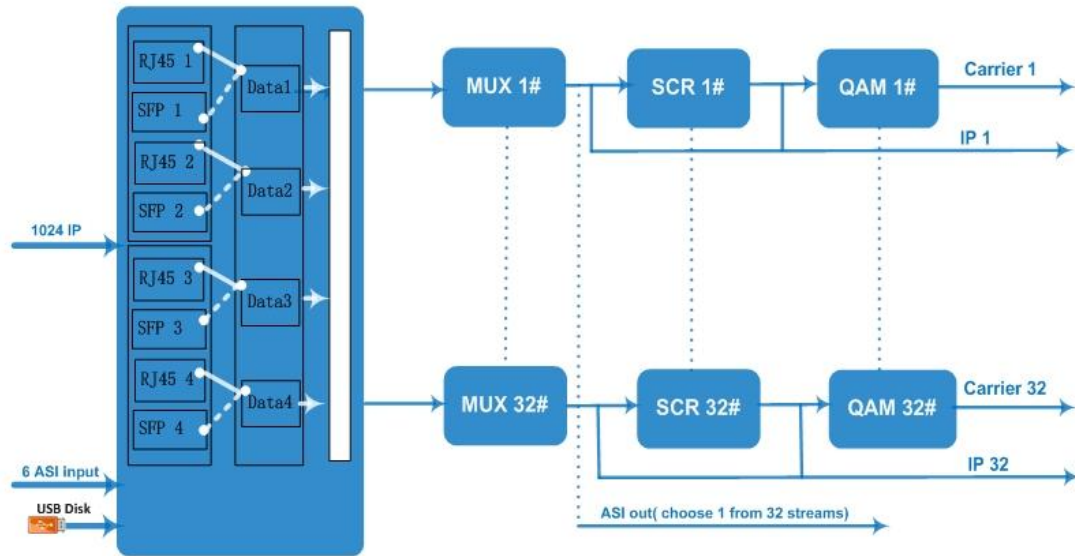

Carrier Setting Illustration:

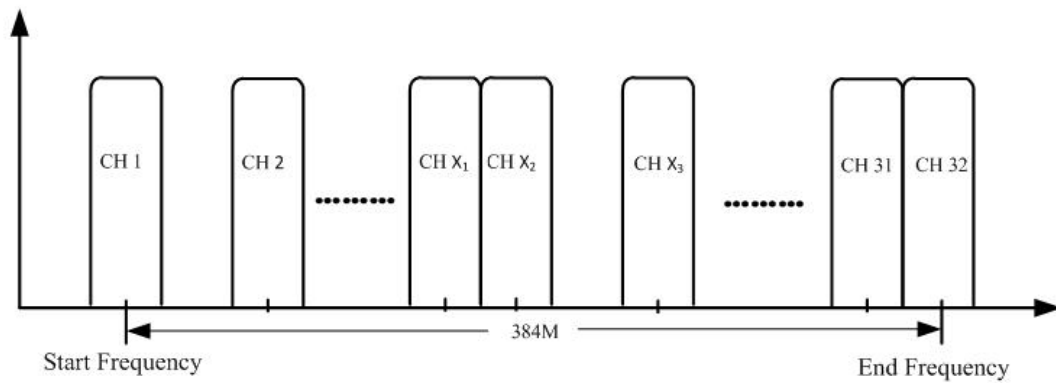

Specifications

Input	Input	16/32 DVB-C carriers: Max 1024 IP input through Data1-D ate4 100/1000M Ethernet Port (or SFP interface optional). Each Data port can input max 1024 IP.	16/32 DVB-C carriers: Max 1024 IP input through Data1-D ate4 100/1000M Ethernet Port (or SFP interface optional). Each Data port can input max 1024 IP.
Input	Input	6 ASI input, BNC interface	6 ASI input, BNC interface
Input	Transport Protocol	TS over UDP/RTP, unicast and multicast, IGMP V2/V3	TS over UDP/RTP, unicast and multicast, IGMP V2/V3

Input	Transmission Rate	Max 840Mbps for each GE input	Max 840Mbps for each GE input
Mux	Input Channel	1024	1024
Mux	Output Channel	16/32	16/32
Mux	Max PIDs	256 per channel	256 per channel
Mux	Functions	PID remapping(auto/manually optional)	PID remapping(auto/manually optional)
Mux	Functions	PCR accurate adjusting	PCR accurate adjusting
Mux	Functions	PSI/SI table automatically generating	PSI/SI table automatically generating
Scrambling Parameters	Max simulcrypt CA	6	6
Scrambling Parameters	Scramble Standard	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197
Scrambling Parameters	Connection	Local/remote connection	Local/remote connection
Modulation Parameters	DVB-C Modulator Section	J.83A	Constellation : 16/32/64/128/256QAM
Modulation Parameters	DVB-C Modulator Section	J.83A	Bandwidth :8M
Modulation Parameters	DVB-C Modulator Section	J.83B	Constellation : 64QAM / 256QAM
Modulation Parameters	DVB-C Modulator Section	J.83B	Bandwidth :6M
Modulation Parameters	QAM Channel	16/32 non-adjacent carrier	16/32 non-adjacent carrier
Modulation Parameters	Modulation Standard	EN300 429/ITU-T J.83A/B(DVB-C)	EN300 429/ITU-T J.83A/B(DVB-C)
Modulation Parameters	Symbol Rate	5.0~7.0Msps, 1ksps stepping	5.0~7.0Msps, 1ksps stepping
Modulation Parameters	Constellation	16, 32, 64 , 128, 256QAM	16, 32, 64 , 128, 256QAM
Modulation Parameters	FEC	RS (204, 188)	RS (204, 188)

RF Output	Interface	1 F typed output port for 16/32 carriers, 75Ω	1 F typed output port for 16/32 carriers, 75Ω
RF Output	RF Range	50~960MHz, 1kHz stepping	50~960MHz, 1kHz stepping
RF Output	Output Level	-20dBm~+10dBm(87~117dbμV), 0.1dB stepping	-20dBm~+10dBm(87~117dbμV), 0.1dB stepping
RF Output	MER	≥ 40dB	≥ 40dB
TS output	16/32 IP output over UDP/RTP/RTSP, unicast/multicast, Data100/1000M Ethernet Ports	16/32 IP output over UDP/RTP/RTSP, unicast/multicast, Data100/1000M Ethernet Ports	16/32 IP output over UDP/RTP/RTSP, unicast/multicast, Data100/1000M Ethernet Ports
TS output	2 ASI output, one as mirror	2 ASI output, one as mirror	2 ASI output, one as mirror
System	Network management software (NMS) supporting	Network management software (NMS) supporting	Network management software (NMS) supporting
General	Demission	420mm×440mm×44.5 mm (W×L×H)	420mm×440mm×44.5 mm (W×L×H)
General	Temperature	0~45■(operation), -20~80■(storage)	0~45■(operation), -20~80■(storage)
General	Power Supply	AC 100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz	AC 100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227