

FMUSER FUQ-4454B-C 4-Channel Encoder Modulator 4x CVBS-YPbPr-S-Video Input DVB-C Tuner & IP Re-Mux MPEG-2 Encoding QAM Modulation for CATV and IPTV Headends Product overview



The FUQ-4454B-C is a 1RU 4-in-1 mux-scrambling encoder modulator with 4× CVBS/YPbPr/S-Video inputs, 1-2× DVB-C tuners, and 2× IP interfaces. It performs MPEG-2 encoding, ETSI-compliant scrambling, and 16-256QAM modulation in a single pass. The unit features 30–999 MHz RF output with web/USB management and complies with DVB-C (EN300 429) and ITU-T J.83A/B/C. Ideal for CATV digital migration and IPTV edge QAM deployments.

Key feature

Modular upgradability: Features pluggable modules and dual web/USB control for future-proof operation.

Specifications


Input	1 or 2 DVB-C Tuner input for remux; 2 IP input for re-mux	1 or 2 DVB-C Tuner input for remux; 2 IP input for re-mux	1 or 2 DVB-C Tuner input for remux; 2 IP input for re-mux	1 or 2 DVB-C Tuner input for remux; 2 IP input for re-mux	1 or 2 DVB-C Tuner input for remux; 2 IP input for re-mux
Input	4 CVBS/YPb Pr/S-Video Input for encoding	4 CVBS/YPb Pr/S-Video Input for encoding	4 CVBS/YPb Pr/S-Video Input for encoding	4 CVBS/YPb Pr/S-Video Input for encoding	4 CVBS/YPb Pr/S-Video Input for encoding
Tuner Input	DVB-C	Standard	J.83A(DVB-C), J.83B, J.83C	J.83A(DVB-C), J.83B, J.83C	J.83A(DVB-C), J.83B, J.83C

Tuner Input	DVB-C	Input Frequency	30MHz-1000 Mhz	30MHz-1000 Mhz	30MHz-1000 Mhz
Tuner Input	DVB-C	Constellation	16/32/64/128/256 QAM	16/32/64/128/256 QAM	16/32/64/128/256 QAM
Encoding	Video	Format	MPEG-2 MP@ML (4:2:0)	MPEG-2 MP@ML (4:2:0)	MPEG-2 MP@ML (4:2:0)
Encoding	Video	Interface	S-Video/YPb Pr/CVBS*4	S-Video/YPb Pr/CVBS*4	S-Video/YPb Pr/CVBS*4
Encoding	Video	Bitrate	1-19.5Mbps	1-19.5Mbps	1-19.5Mbps
Encoding	Video	Resolution	720*480_60i, 720*576_50i	720*480_60i, 720*576_50i	720*480_60i, 720*576_50i
Encoding	Video	Rate mode	VBR/CBR	VBR/CBR	VBR/CBR
Encoding	Video	Chroma	4:2:0	4:2:0	4:2:0
Encoding	Video	Aspect	16:9,4:3, 1:1, 2.21:1	16:9,4:3, 1:1, 2.21:1	16:9,4:3, 1:1, 2.21:1
Encoding	Audio	Format	MPEG1 Layer II, AC3	MPEG1 Layer II, AC3	MPEG1 Layer II, AC3
Encoding	Audio	Sampling	48KHz	48KHz	48KHz
Encoding	Audio	Bitrate	64kbps,96kbps,128kbps,192kbps,256kbps,320kbps	64kbps,96kbps,128kbps,192kbps,256kbps,320kbps	64kbps,96kbps,128kbps,192kbps,256kbps,320kbps
Multiplexing	Maximum PID Remapping	128per input channel	128per input channel	128per input channel	128per input channel
Multiplexing	Function	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)
Multiplexing	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Scrambling	Maximum simulcrypt CA	4	4	4	4

Scrambling	Standard	ETSI 101 197, ETSI 103 197	ETSI 101 197, ETSI 103 197	ETSI 101 197, ETSI 103 197	ETSI 101 197, ETSI 103 197
Scrambling	Connection	Local/remote connection	Local/remote connection	Local/remote connection	Local/remote connection
Modulation	QAM Channel	4	4	4	4
Modulation	Standard	EN300 429/ITU-T J.83A/B/C	EN300 429/ITU-T J.83A/B/C	EN300 429/ITU-T J.83A/B/C	EN300 429/ITU-T J.83A/B/C
Modulation	MER	≥40db	≥40db	≥40db	≥40db
Modulation	RF frequency	30~999MHz, 1KHz step	30~999MHz, 1KHz step	30~999MHz, 1KHz step	30~999MHz, 1KHz step
Modulation	RF output level	-20~0dbm(87~107 dbμV), 0.1db step	-20~0dbm(87~107 dbμV), 0.1db step	-20~0dbm(87~107 dbμV), 0.1db step	-20~0dbm(87~107 dbμV), 0.1db step
Modulation	Symbol Rate	5.0Msps~9.0 Msps, 1ksps stepping	5.0Msps~9.0 Msps, 1ksps stepping	5.0Msps~9.0 Msps, 1ksps stepping	5.0Msps~9.0 Msps, 1ksps stepping
Modulation	Constellation	16/32/64/128/ 256QAM	16/32/64/128/ 256QAM	16/32/64/128/ 256QAM	16/32/64/128/ 256QAM
Modulation		J.83A	J.83A	J.83B	J.83C
Modulation	Constellation	16/32/64/128/ 256QAM	16/32/64/128/ 256QAM	64/256 QAM	64/256 QAM
Modulation	Bandwidth	8M	8M	6M	6M
System	Local interface	LCD + control buttons	LCD + control buttons	LCD + control buttons	LCD + control buttons
System	Remote management	Web NMS	Web NMS	Web NMS	Web NMS
System	Stream Out	4*MPTS IP over UDP out (RJ45, 1000M, Unicast/Multicast)	4*MPTS IP over UDP out (RJ45, 1000M, Unicast/Multicast)	4*MPTS IP over UDP out (RJ45, 1000M, Unicast/Multicast)	4*MPTS IP over UDP out (RJ45, 1000M, Unicast/Multicast)
System	Language	English	English	English	English
System	Software Upgrading	Web and USB port	Web and USB port	Web and USB port	Web and USB port

General	Dimension (W*D*H)	482mm×300mm×44.5mm	482mm×300mm×44.5mm	482mm×300mm×44.5mm	482mm×300mm×44.5mm
General	Weight	3.7kg	3.7kg	3.7kg	3.7kg
General	Temperature	0~45■(Operation) ; -20~80 ■(Storage)	0~45■(Operation) ; -20~80 ■(Storage)	0~45■(Operation) ; -20~80 ■(Storage)	0~45■(Operation) ; -20~80 ■(Storage)
General	Power	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ
General	Consumption	25W	25W	25W	25W

Working Principle

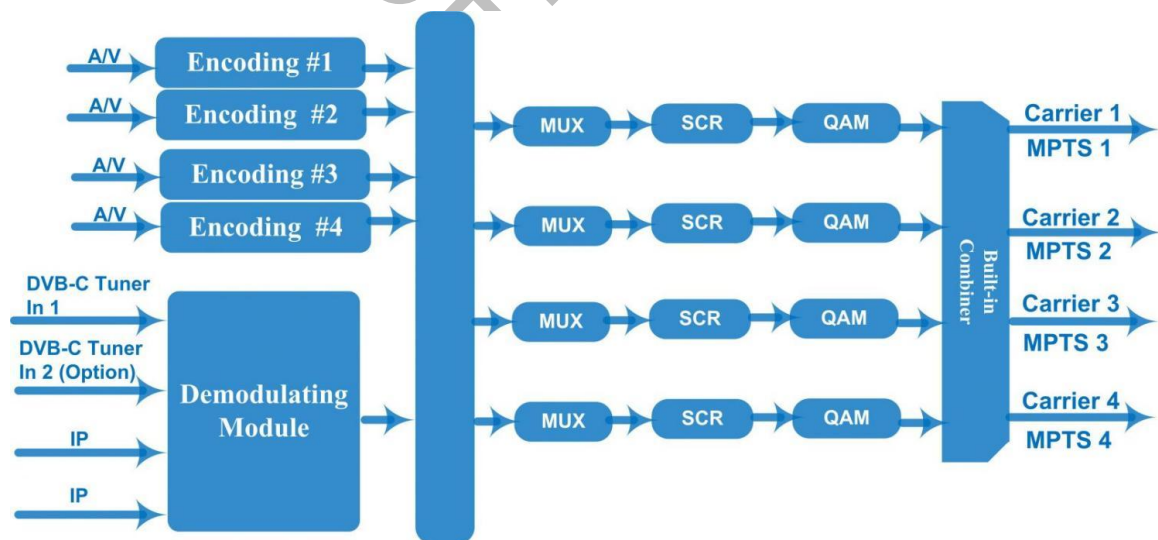

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)