


FMUSER FUQ-4455B IP QAM Modulator 192 IP Inputs UDP-RTP DVB-C EN300-429 ITU-T J.83 A-B-C PID Remapping PCR Adjusting IPTV Cable TV Headend

Product overview

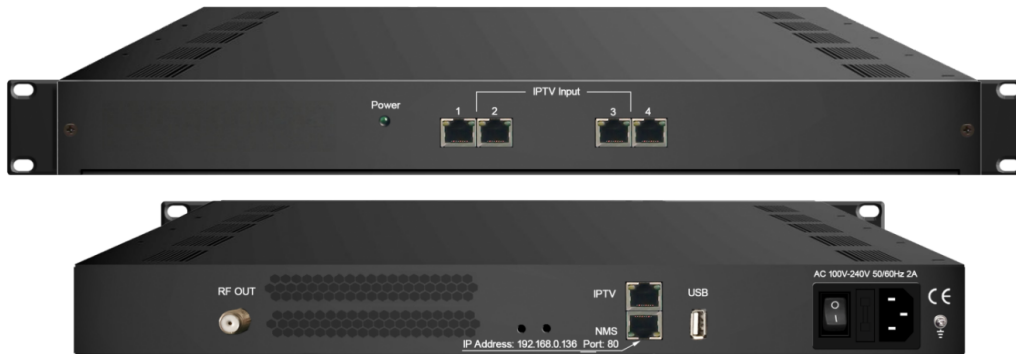

The FUQ-4455B IP QAM Modulator integrates multiplexing, scrambling, and modulation, processing 192 IP inputs via 4×FE and 1×GE ports to output 4 DVB-C RF carriers. It handles SPTS/MPTS streams using UDP/RTP, with PID remapping and PSI/SI editing for compliance. Features web-based control and USB upgrades in a compact chassis. Ideal for IPTV systems and cable TV headends, enabling flexible integration.

Key Features


Handles High-Capacity IP Inputs: Supports 192 SPTS/MPTS streams via UDP/RTP with 4×FE and 1×GE ports. **FMUSER FUQ-4455B IP QAM Modulator 192 IP Inputs UDP-RTP DVB-C EN300-429 ITU-T J.83 A-B-C PID Remapping PCR Adjusting IPTV Cable TV Headend**

Supports Precision Signal Control: Enables PID remapping, PCR adjusting, and PSI/SI editing for DVB-C standards. **FMUSER FUQ-4455B IP QAM Modulator 192 IP Inputs UDP-RTP DVB-C EN300-429 ITU-T J.83 A-B-C PID Remapping PCR Adjusting IPTV Cable TV Headend**

Generates Multi-Standard RF Output: Delivers 4 adjacent QAM carriers (30MHz–1000MHz) meeting EN 300 429/ITU-T J.83 A/B/C. **FMUSER FUQ-4455B IP QAM Modulator 192 IP Inputs UDP-RTP DVB-C EN300-429 ITU-T J.83 A-B-C PID Remapping PCR Adjusting IPTV Cable TV Headend**

Features Unified Management: Includes web-based control, USB upgrades, and IPTV Sync/NTP synchronization.

Working Principle

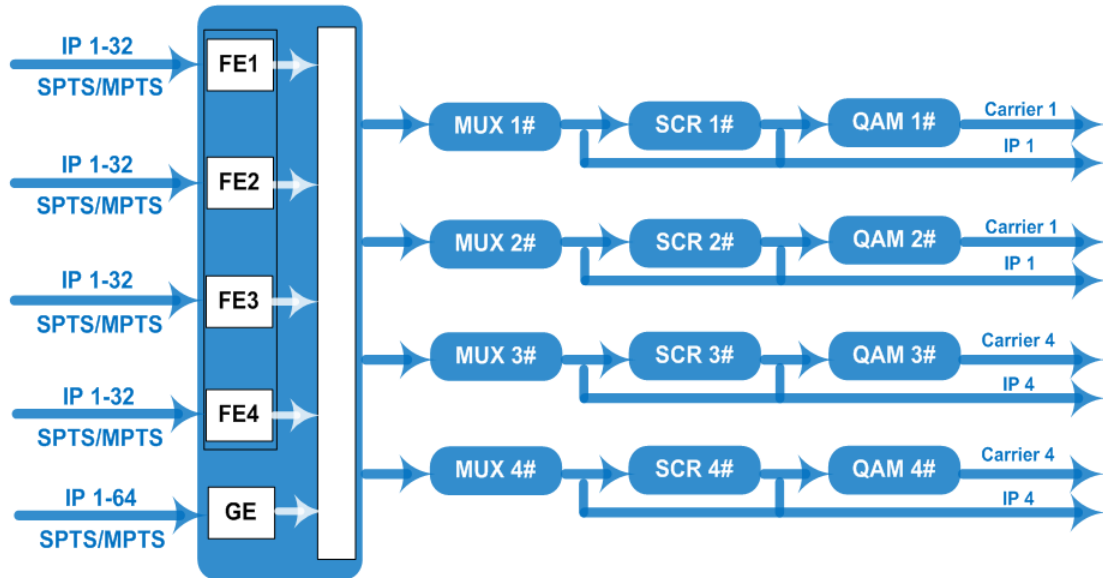

Specifications

Input	128 IP (SPTS/MPTS) input over UDP/RTP, 4*100M Ethernet port, and 64 IP (SPTS/MPTS) input over UDP/RTP, 1*100/1000M Ethernet ports	128 IP (SPTS/MPTS) input over UDP/RTP, 4*100M Ethernet port, and 64 IP (SPTS/MPTS) input over UDP/RTP, 1*100/1000M Ethernet ports	128 IP (SPTS/MPTS) input over UDP/RTP, 4*100M Ethernet port, and 64 IP (SPTS/MPTS) input over UDP/RTP, 1*100/1000M Ethernet ports	128 IP (SPTS/MPTS) input over UDP/RTP, 4*100M Ethernet port, and 64 IP (SPTS/MPTS) input over UDP/RTP, 1*100/1000M Ethernet ports
Multiplexing	Maximum PID Remapping	748 per input channel	748 per input channel	748 per input channel
Multiplexing	Function	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)
Multiplexing	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Scrambling	Maximum simulcrypt CA	4	4	4

Scrambling	Standard	ETSI 101 197, ETSI 103 197	ETSI 101 197, ETSI 103 197	ETSI 101 197, ETSI 103 197
Scrambling	Connection	Local/remote connection	Local/remote connection	Local/remote connection
Modulation	QAM Channel	1 F typed output port for 4 carriers, 75Ω	1 F typed output port for 4 carriers, 75Ω	1 F typed output port for 4 carriers, 75Ω
Modulation	Standard	EN300 429/ITU-T J.83A/B/C	EN300 429/ITU-T J.83A/B/C	EN300 429/ITU-T J.83A/B/C
Modulation	MER	≥40db	≥40db	≥40db
Modulation	RF Frequency	30~1000 MHz, 1kHz stepping	30~1000 MHz, 1kHz stepping	30~1000 MHz, 1kHz stepping
Modulation	RF Output level	-10dBm~+0dBm, 0.1dB stepping	-10dBm~+0dBm, 0.1dB stepping	-10dBm~+0dBm, 0.1dB stepping
Modulation	FEC	RS (204, 188)	RS (204, 188)	RS (204, 188)
Modulation	Symbol Rate	5.0Msps~9.0Msp s, 1ksps stepping	5.0Msps~9.0Msp s, 1ksps stepping	5.0Msps~9.0Msp s, 1ksps stepping
Modulation		J.83A	J.83B	J.83C
Modulation	Constellation	16/32/64/128/256 QAM	64/256 QAM	64/256 QAM
Modulation	Bandwidth	8M	6M	6M
Stream Out	4 IP (SPTS/MPTS) output over UDP, 1*1000M Ethernet port (IPTV Port)	4 IP (SPTS/MPTS) output over UDP, 1*1000M Ethernet port (IPTV Port)	4 IP (SPTS/MPTS) output over UDP, 1*1000M Ethernet port (IPTV Port)	4 IP (SPTS/MPTS) output over UDP, 1*1000M Ethernet port (IPTV Port)
System	Web-based Network management	Web-based Network management	Web-based Network management	Web-based Network management
System	Chinese and Eng lish Language	Chinese and Eng lish Language	Chinese and Eng lish Language	Chinese and Eng lish Language
System	Web and USB software upgrade	Web and USB software upgrade	Web and USB software upgrade	Web and USB software upgrade
General	Dimension	430mm×180mm ×44mm (W*L*H)	430mm×180mm ×44mm (W*L*H)	430mm×180mm ×44mm (W*L*H)

General	Temperature	0~45■(Operation) ; -20~80■(Storage)	0~45■(Operation) ; -20~80■(Storage)	0~45■(Operation) ; -20~80■(Storage)
General	Power	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

FMUSER FUQ-4455B IP QAM Modulator 192 IP Inputs UDP-RTP DVB-C EN300-429 ITU-T J.83 A-B-C PID Remapping PCR Adjusting IPTV Cable TV Headend Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227