

FMUSER FUQ-4459AB-CD Quad-Channel DVB-T-DVB-C Modulator 128 IP Inputs 4 MPTS IP Outputs BISS Descrambling Web-Based NMS Control for Digital Broadcast Networks

[Product overview](#)




The FUQ-4459AB/CD series are professional quad-channel modulators supporting 12× DVB-S2/T tuner inputs and 128 IP (UDP/RTP) streams. They perform MPTS multiplexing and DVB-T/C modulation (EN300744/J.83A/B) with BISS Mode 1/E descrambling. Featuring 1RU rack-mount design and web-based NMS control, these devices are ideal for multi-format headend systems, IP-to-RF conversion, and secure satellite-to-terrestrial redistribution.


[Key feature](#)

Complies with DVB-T EN300744 (TS) and DVB-C J.83A/B (CS) standards

[FU-4459TS DVB-T Principle Chart](#)

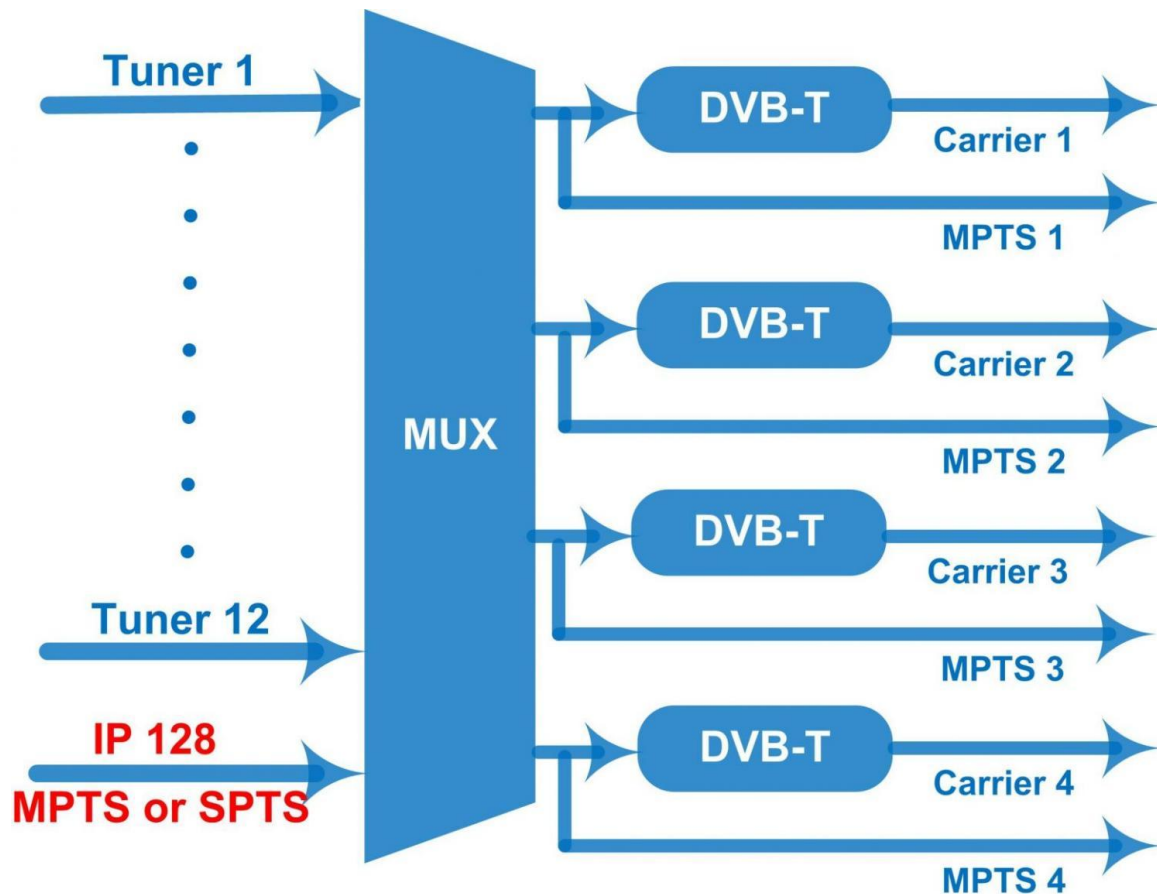

FU-4459CS DVB-C Principle Chart

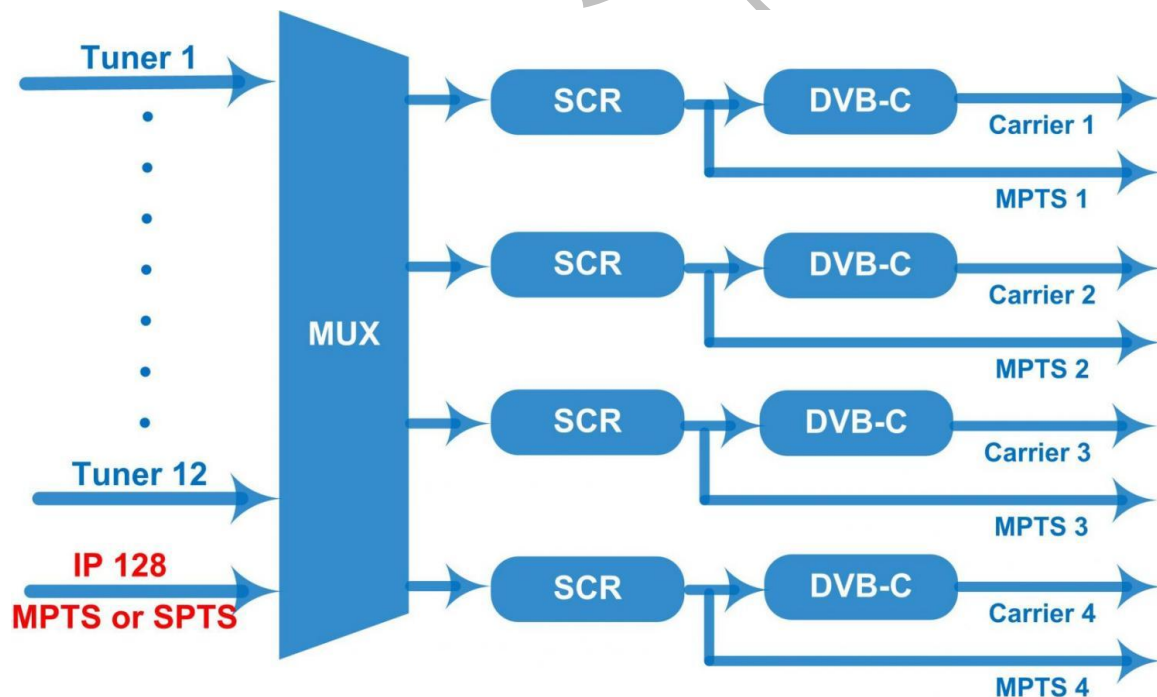

Specifications

Input	12 DVB-S2 FTA Tuner input ports--- Version I 12 DVB-T Tuner input ports--- Version II 8 DVB-S2 FTA tuner+ 4 DVB-T tuner i nput---Versio n III 8 DVB-T FTA tuner+4 DVB-S2 tuner input---Versio n IV 128 IP(S PTS/MPTS) input over UDP and RTP, RJ45, 1000M/100M Unicast/Multi cast	12 DVB-S2 FTA Tuner input ports--- Version I 12 DVB-T Tuner input ports--- Version II 8 DVB-S2 FTA tuner+ 4 DVB-T tuner i nput---Versio n III 8 DVB-T FTA tuner+4 DVB-S2 tuner input---Versio n IV 128 IP(S PTS/MPTS) input over UDP and RTP, RJ45, 1000M/100M Unicast/Multi cast	12 DVB-S2 FTA Tuner input ports--- Version I 12 DVB-T Tuner input ports--- Version II 8 DVB-S2 FTA tuner+ 4 DVB-T tuner i nput---Versio n III 8 DVB-T FTA tuner+4 DVB-S2 tuner input---Versio n IV 128 IP(S PTS/MPTS) input over UDP and RTP, RJ45, 1000M/100M Unicast/Multi cast	12 DVB-S2 FTA Tuner input ports--- Version I 12 DVB-T Tuner input ports--- Version II 8 DVB-S2 FTA tuner+ 4 DVB-T tuner i nput---Versio n III 8 DVB-T FTA tuner+4 DVB-S2 tuner input---Versio n IV 128 IP(S PTS/MPTS) input over UDP and RTP, RJ45, 1000M/100M Unicast/Multi cast	12 DVB-S2 FTA Tuner input ports--- Version I 12 DVB-T Tuner input ports--- Version II 8 DVB-S2 FTA tuner+ 4 DVB-T tuner i nput---Versio n III 8 DVB-T FTA tuner+4 DVB-S2 tuner input---Versio n IV 128 IP(S PTS/MPTS) input over UDP and RTP, RJ45, 1000M/100M Unicast/Multi cast
Tuner Section	DVB-S	Input Frequency	Input Frequency	950-2150MHz	950-2150MHz
Tuner Section	DVB-S	Symbol rate	Symbol rate	2-45Msps	2-45Msps
Tuner Section	DVB-S	Signal Strength	Signal Strength	-65~-25dBm	-65~-25dBm
Tuner Section	DVB-S	FEC Demodulation	FEC Demodulation	1/2, 2/3, 3/4, 5/6, 7/8 QPSK	1/2, 2/3, 3/4, 5/6, 7/8 QPSK
Tuner Section	DVB-S2	Input Frequency	Input Frequency	950-2150MHz	950-2150MHz
Tuner Section	DVB-S2	Symbol rate	Symbol rate	QPSK 1~45Mbauds; 8PSK 2~30Mbauds	QPSK 1~45Mbauds; 8PSK 2~30Mbauds
Tuner Section	DVB-S2	Code rate	Code rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	DVB-S2	Constellation	Constellation	QPSK, 8PSK	QPSK, 8PSK

Tuner Section	DVB-T/(T)	Input Frequency	Input Frequency	30MHz ~999.999 MHz	30MHz ~999.999 MHz
Tuner Section	DVB-T/(T)	Bandwidth	Bandwidth	6M, 7M, 8M	6M, 7M, 8M
BISS descrambling	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)
Multiplexing	Maximum PID Remapping	Maximum PID Remapping	256 per input channel	256 per input channel	256 per input channel
Multiplexing	Function	Function	PID remapping	PID remapping	PID remapping
Multiplexing	Function	Function	A/V PID filtering (for FU-4459TS)	A/V PID filtering (for FU-4459TS)	A/V PID filtering (for FU-4459TS)
Multiplexing	Function	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Modulation	DVB-T	DVB-T	Standard	EN300744	EN300744
Modulation	DVB-T	DVB-T	FFT mode	2K,	2K,
Modulation	DVB-T	DVB-T	Bandwidth	6M, 7M, 8M	6M, 7M, 8M
Modulation	DVB-T	DVB-T	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Modulation	DVB-T	DVB-T	Guard Interval	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32
Modulation	DVB-T	DVB-T	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	DVB-T	DVB-T	MER	≥42 dB	≥42 dB
Modulation	DVB-T	DVB-T	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step

Modulation	DVB-T	DVB-T	RF out	4*DVB-T adjacent carriers combined output, 40M total bandwidth limitation	4*DVB-T adjacent carriers combined output, 40M total bandwidth limitation
Modulation	DVB-T	DVB-T	RF output level	-28~ -3 dBm (79~105 dBμV), 0.1db step	-28~ -3 dBm (79~105 dBμV), 0.1db step
Modulation	DVB-C	DVB-C	Standard	J.83A (DVB-C), J.83B,	J.83A (DVB-C), J.83B,
Modulation	DVB-C	DVB-C	MER	≥43dB	≥43dB
Modulation	DVB-C	DVB-C	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step
Modulation	DVB-C	DVB-C	RF output level	-25~ -1dbm (82~106 dBμV), 0.1db step	-25~ -1dbm (82~106 dBμV), 0.1db step
Modulation	DVB-C	DVB-C	Symbol rate	5.000~7.000 Msps adjustable	5.000~7.000 Msps adjustable
Modulation	DVB-C	DVB-C	RF Out	4*DVB-C adjacent carriers combined output, 40M total bandwidth limitation	4*DVB-C adjacent carriers combined output, 40M total bandwidth limitation
Modulation	DVB-C	DVB-C		J.83A	J.83B
Modulation	DVB-C	DVB-C	Constellation	16/32/64/128/ 256 QAM	64/ 256 QAM
Modulation	DVB-C	DVB-C	Bandwidth	8M	6M

Stream out	4*MPTS over UDP and RTP out , RJ45, 1000M/100M, Unicast/Multicast	4*MPTS over UDP and RTP out , RJ45, 1000M/100M, Unicast/Multicast	4*MPTS over UDP and RTP out , RJ45, 1000M/100M, Unicast/Multicast	4*MPTS over UDP and RTP out , RJ45, 1000M/100M, Unicast/Multicast	4*MPTS over UDP and RTP out , RJ45, 1000M/100M, Unicast/Multicast
System	web-based NMS support	web-based NMS support	web-based NMS support	web-based NMS support	web-based NMS support
System	Ethernet software upgrading	Ethernet software upgrading	Ethernet software upgrading	Ethernet software upgrading	Ethernet software upgrading
General	Dimension (W*D*H)	Dimension (W*D*H)	482mm×300mm×44.5mm	482mm×300mm×44.5mm	482mm×300mm×44.5mm
General	Temperature	Temperature	0~45■(Operation) ; -20~80 ■(Storage)	0~45■(Operation) ; -20~80 ■(Storage)	0~45■(Operation) ; -20~80 ■(Storage)
General	Power	Power	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1050/60Hz; AC 220V±10%, 50/60HZ

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)