

FMUSER FUQ-4459R DVB-T Modulator 8 Tuner Inputs 4 RF Outputs DVB-C-T-S-S2-S2X-ISDB-T-ATSC IP UDP-RTP CAM BISS Descrambling Headend IPTV Cable TV Its production is stopped temporarily, and the date for resuming production is not fixed yet.



Product overview

The FMUSER FUQ-4459R is a high-performance DVB-T modulator with 8 tuner inputs and one RF output port, delivering 4 non-adjacent carriers. It processes signals by modulating them to DVB-T standards and supports IP input/output via UDP/RTP protocols. Features include CAM/CI descrambling and web-based NMS for remote management, ideal for broadcast transmission, IPTV headends, and cable TV systems. FU-4459T can be upgraded and controlled through network system, which allows it widely used in digital broadcasting network and provide good signals for scientific laboratory and DVB-T STB.

Key feature


Supports 8 tuner inputs with optional DVB-C/T/S/S2/S2X/ISDBT/ATSC standards and CAM slots.

Provides up to 128 IP inputs via UDP/RTP protocols (Version 1 only).

Features BISS descrambling and CAM/CI support.

Includes web-based NMS for remote control and upgrades.

Principle Chart

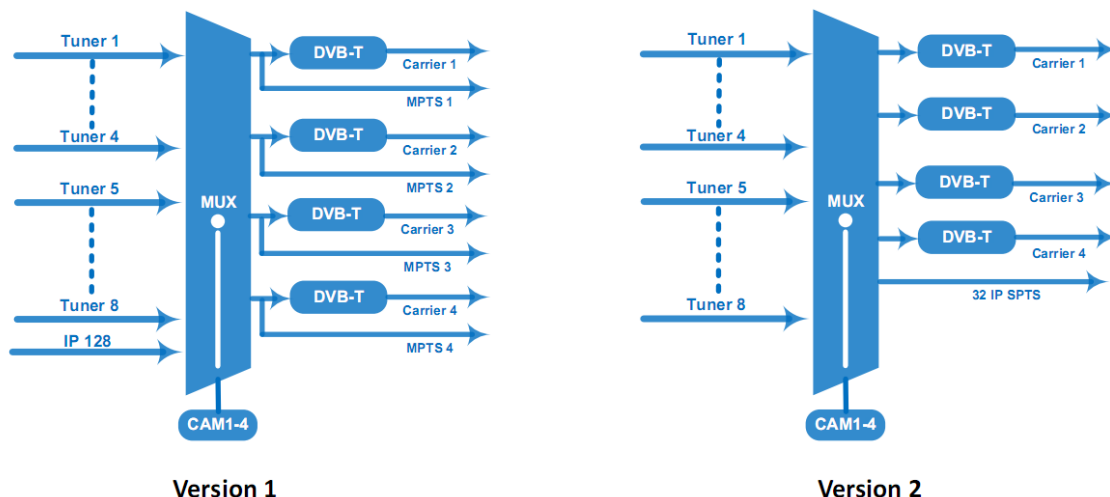

Specifications

Input	4 Tuner (DVB-C/T/(T)/S/S2/S2X/I SDBT optional) + 4 Tuner with CAM (DVB-C/T/(T)/S/S2/S2X/I ATSC/ISD BT optional); 128 IP (SP TS/MPTS) input over UDP and RTP, RJ45, 1000M/100 M, Unicast/Multicast (IP input is for Version 1 only)	4 Tuner (DVB-C/T/(T)/S/S2/S2X/I SDBT optional) + 4 Tuner with CAM (DVB-C/T/(T)/S/S2/S2X/I ATSC/ISD BT optional); 128 IP (SP TS/MPTS) input over UDP and RTP, RJ45, 1000M/100 M, Unicast/Multicast (IP input is for Version 1 only)	4 Tuner (DVB-C/T/(T)/S/S2/S2X/I SDBT optional) + 4 Tuner with CAM (DVB-C/T/(T)/S/S2/S2X/I ATSC/ISD BT optional); 128 IP (SP TS/MPTS) input over UDP and RTP, RJ45, 1000M/100 M, Unicast/Multicast (IP input is for Version 1 only)	4 Tuner (DVB-C/T/(T)/S/S2/S2X/I SDBT optional) + 4 Tuner with CAM (DVB-C/T/(T)/S/S2/S2X/I ATSC/ISD BT optional); 128 IP (SP TS/MPTS) input over UDP and RTP, RJ45, 1000M/100 M, Unicast/Multicast (IP input is for Version 1 only)	4 Tuner (DVB-C/T/(T)/S/S2/S2X/I SDBT optional) + 4 Tuner with CAM (DVB-C/T/(T)/S/S2/S2X/I ATSC/ISD BT optional); 128 IP (SP TS/MPTS) input over UDP and RTP, RJ45, 1000M/100 M, Unicast/Multicast (IP input is for Version 1 only)	4 Tuner (DVB-C/T/(T)/S/S2/S2X/I SDBT optional) + 4 Tuner with CAM (DVB-C/T/(T)/S/S2/S2X/I ATSC/ISD BT optional); 128 IP (SP TS/MPTS) input over UDP and RTP, RJ45, 1000M/100 M, Unicast/Multicast (IP input is for Version 1 only)
Tuner Section	Multi-mode tuners switchable (New)	DVB-C	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz
Tuner Section	Multi-mode tuners switchable (New)	DVB-C	Standard	Standard	J.83A, J.83C	J.83B

Tuner Section	Multi-mode tuners switchable (New)	DVB-C	Constellation	Constellation	16/32/64/128/256 QAM	64/256 QAM
Tuner Section	Multi-mode tuners switchable (New)	DVB-T/(T)	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz
Tuner Section	Multi-mode tuners switchable (New)	DVB-T/(T)	Bandwidth	Bandwidth	6/7/8 M	6/7/8 M
Tuner Section	Multi-mode tuners switchable (New)	ISDB-T	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz
Tuner Section	DVB-S/S2 Tuner	DVB-S	Input Frequency	Input Frequency	950~150M Hz	950~150M Hz
Tuner Section	DVB-S/S2 Tuner	DVB-S	Symbol rate	Symbol rate	0.5~45Msp s	0.5~45Msp s
Tuner Section	DVB-S/S2 Tuner	DVB-S	Signal Strength	Signal Strength	-65~-25dB m	-65~-25dB m
Tuner Section	DVB-S/S2 Tuner	DVB-S	FEC Demodulation	FEC Demodulation	1/2, 2/3, 3/4, 5/6, 7/8 QPSK	1/2, 2/3, 3/4, 5/6, 7/8 QPSK
Tuner Section	DVB-S/S2 Tuner	DVB-S2	Input Frequency	Input Frequency	950~2150 MHz	950~2150 MHz
Tuner Section	DVB-S/S2 Tuner	DVB-S2	Symbol rate	Symbol rate	QPSK: 1~45Msp s; 8PSK: 0.5~45Msp s	QPSK: 1~45Msp s; 8PSK: 0.5~45Msp s
Tuner Section	DVB-S/S2 Tuner	DVB-S2	Code rate	Code rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	DVB-S/S2 Tuner	DVB-S2	Constellation	Constellation	QPSK, 8PSK	QPSK, 8PSK
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S	Input Frequency	Input Frequency	950~2150 MHz	950~2150 MHz

Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S	Symbol rate	Symbol rate	0.5~45Mps	0.5~45Mps
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S	Signal Strength	Signal Strength	- 65- -25dBm	- 65- -25dBm
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S	Constellation	Constellation	QPSK	QPSK
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S	Max input bitrate	Max input bitrate	≤129 Mbps	≤129 Mbps
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S2	Input Frequency	Input Frequency	950~2150 MHz	950~2150 MHz
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S2	Symbol rate	Symbol rate	QPSK/8PSK /16APSK: 0.5~45 Mps 32APSK: 0.5~40Mps;	QPSK/8PSK /16APSK: 0.5~45 Mps 32APSK: 0.5~40Mps;
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S2	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10

Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S2	Constellation	Constellation	QPSK, 8PSK, 16APSK, 32APSK	QPSK, 8PSK, 16APSK, 32APSK
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S2	Max input bitrate	Max input bitrate	≤129 Mbps	≤129 Mbps
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S2X	Input Frequency	Input Frequency	950~2150 MHz	950~2150 MHz
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S2X	Symbol rate	Symbol rate	QPSK/8PSK: 0.5~45 Msps 16APSK: 0.5~40Msps 32APSK: 0.5~40Msps	QPSK/8PSK: 0.5~45 Msps 16APSK: 0.5~40Msps 32APSK: 0.5~40Msps

Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S2X	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S2X	Constellation	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Tuner Section	DVB-S/S2/S2X Tuner (New)	DVB-S2X	Max input bitrate	Max input bitrate	≤129 Mbps	≤129 Mbps
Tuner Section	ATSC-T	ATSC-T	Input Frequency	Input Frequency	54~858MHz	54~858MHz

Tuner Section	ATSC-T	ATSC-T	Bandwidth	Bandwidth	6M	6M
Descrambling	CAM/CI	CAM/CI	4 sets	4 sets	4 sets	4 sets
BISS Descrambling	Mode 1, Mode E (de scramble individual program)	Mode 1, Mode E (de scramble individual program)	Mode 1, Mode E (de scramble individual program)	Mode 1, Mode E (de scramble individual program)	Mode 1, Mode E (de scramble individual program)	Mode 1, Mode E (de scramble individual program)
Multiplexing	Maximum PID Remapping	Maximum PID Remapping	256 per input channel	256 per input channel	256 per input channel	256 per input channel
Multiplexing	Function	Function	A/V PID filtering	A/V PID filtering	A/V PID filtering	A/V PID filtering
Multiplexing	Function	Function	PID Remapping	PID Remapping	PID Remapping	PID Remapping
Multiplexing	Function	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Modulation	DVB-T	DVB-T	Standard	EN300744	EN300744	EN300744
Modulation	DVB-T	DVB-T	FFT mode	2K	2K	2K
Modulation	DVB-T	DVB-T	Bandwidth	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M
Modulation	DVB-T	DVB-T	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Modulation	DVB-T	DVB-T	Guard Interval	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32
Modulation	DVB-T	DVB-T	Code Rate	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	DVB-T	DVB-T	MER	≥42 dB	≥42 dB	≥42 dB
Modulation	DVB-T	DVB-T	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step	50~960MHz, 1KHz step

Modulation	DVB-T	DVB-T	RF out	4*DVB-T non-adjacent carriers combined output, 40M total bandwidth limitation	4*DVB-T non-adjacent carriers combined output, 40M total bandwidth limitation	4*DVB-T non-adjacent carriers combined output, 40M total bandwidth limitation
Modulation	DVB-T	DVB-T	RF output level	-28~ -3 dBm (79~104 dBμV), 0.1db step	-28~ -3 dBm (79~104 dBμV), 0.1db step	-28~ -3 dBm (79~104 dBμV), 0.1db step
Stream out	UDP and RTP protocol (RJ45, 1000M/100M Unicast/Multicast) 4*MPTS out --- Version 1 ; 32*SPTS out ---Version 2	UDP and RTP protocol (RJ45, 1000M/100M Unicast/Multicast) 4*MPTS out --- Version 1 ; 32*SPTS out ---Version 2	UDP and RTP protocol (RJ45, 1000M/100M Unicast/Multicast) 4*MPTS out --- Version 1 ; 32*SPTS out ---Version 2	UDP and RTP protocol (RJ45, 1000M/100M Unicast/Multicast) 4*MPTS out --- Version 1 ; 32*SPTS out ---Version 2	UDP and RTP protocol (RJ45, 1000M/100M Unicast/Multicast) 4*MPTS out --- Version 1 ; 32*SPTS out ---Version 2	UDP and RTP protocol (RJ45, 1000M/100M Unicast/Multicast) 4*MPTS out --- Version 1 ; 32*SPTS out ---Version 2
System	Web-based NMS support	Web-based NMS support	Web-based NMS support	Web-based NMS support	Web-based NMS support	Web-based NMS support
System	Ethernet software upgrading	Ethernet software upgrading	Ethernet software upgrading	Ethernet software upgrading	Ethernet software upgrading	Ethernet software upgrading
General	Dimension	Dimension	482mm×300mm×44.5mm (W*D*H)	482mm×300mm×44.5mm (W*D*H)	482mm×300mm×44.5mm (W*D*H)	482mm×300mm×44.5mm (W*D*H)
General	Temperature	Temperature	0~45℃(Operation) ; -20~80℃(Storage)	0~45℃(Operation) ; -20~80℃(Storage)	0~45℃(Operation) ; -20~80℃(Storage)	0~45℃(Operation) ; -20~80℃(Storage)

General	Power	Power	AC 100V±1 050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1 050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1 050/60Hz; AC 220V±10%, 50/60HZ	AC 100V±1 050/60Hz; AC 220V±10%, 50/60HZ
---------	-------	-------	--	--	--	--

Order Guide

	Version 1	Version 2
IP input	128 SPTS/MPTS input	N/A
IP output	4 MPTS output	32 SPTS output

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227