




FMUSER FUQ-4514G DVB-S2X IF Modulator 4 ASI + 1 IP Input 1 IF Output ASI-IP to DVB-S-S2-S2X BISS Scrambling Web-server Control for Broadcasting and Satellite Communications

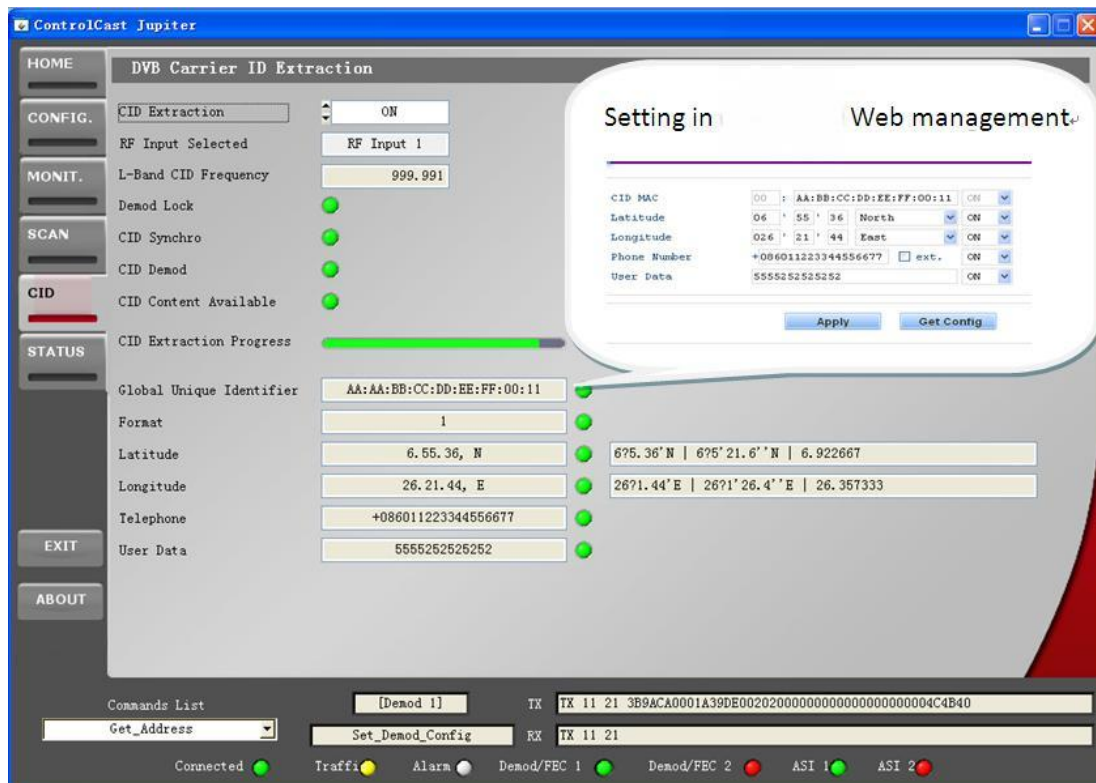

Product overview

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

Key feature

Complies with DVB-S, DVB-S2, and DVB-S2X standards.


Supports 4 ASI inputs with hot backup and IP input.

Features BISS scrambling for secure content protection.

Enables control via Web-server NMS and front panel LCD.

Output frequency: 50-960MHz with 1KHz stepping.

Principle Chart

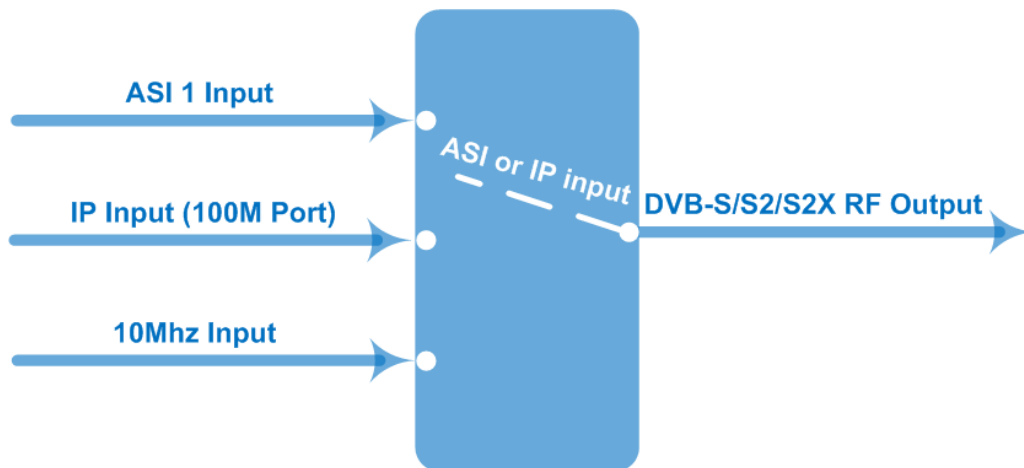

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

Specifications

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

Supporting both 188 Byte Packet TS Input

Supporting both 188 Byte Packet TS Input

Supporting both 188 Byte Packet TS Input

Supporting both 188 Byte Packet TS Input

Supporting both 188 Byte Packet TS Input

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

4 ASI Inputs (3 ASI for backup)

4 ASI Inputs (3 ASI for backup)

4 ASI Inputs (3 ASI for backup)

4 ASI Inputs (3 ASI for backup)

4 ASI Inputs (3 ASI for backup)

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications. FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications. ASI Input

Connector: BNC, Impedance 75Ω

Connector: BNC, Impedance 75Ω

Connector: BNC, Impedance 75Ω

Connector: BNC, Impedance 75Ω

Connector: BNC, Impedance 75Ω

IP Input

1*IP Input (RJ45, 100M TS Over UDP)

1*IP Input (RJ45, 100M TS Over UDP)

1*IP Input (RJ45, 100M TS Over UDP)

1*IP Input (RJ45, 100M TS Over UDP)

1*IP Input (RJ45, 100M TS Over UDP)

10MHz Input

1*10MHz Input (BNC Interface)

1*10MHz Input (BNC Interface)

1*10MHz Input (BNC Interface)

1*10MHz Input (BNC Interface)

1*10MHz Input (BNC Interface)

IF Output

Range:50 ~ 960 MHz, 1KHz step

Range:50 ~ 960 MHz, 1KHz step

Range:50 ~ 960 MHz, 1KHz step

Range:50 ~ 960 MHz, 1KHz step

Range:50 ~ 960 MHz, 1KHz step

IF Output

Output Level Attenuation: -28.5dBm~+3 dBm, 0.5dB Step

Output Level Attenuation: -28.5dBm~+3 dBm, 0.5dB Step

Output Level Attenuation: -28.5dBm~+3 dBm, 0.5dB Step

Output Level Attenuation: -28.5dBm~+3 dBm, 0.5dB Step

Output Level Attenuation: -28.5dBm~+3 dBm, 0.5dB Step

IF Output

MER $\geq$ 40dB

MER $\geq$ 40dB

MER $\geq$ 40dB

MER $\geq$ 40dB

MER $\geq$ 40dB

IF Output

Connector: N type, impedance 50 Ω

Connector: N type, impedance 50 Ω

Connector: N type, impedance 50 Ω

Connector: N type, impedance 50 Ω

Connector: N type, impedance 50 Ω

Channel Coding and Modulation

Standard

DVB-S

DVB-S

DVB-S2

DVB-S2X

Channel Coding and Modulation

Outer coding

RS Coding

RS Coding

BCH Coding

BCH Coding

Channel Coding and Modulation

Inner coding

Convolution

Convolution

LDPC Coding

LDPC Coding

Channel Coding and Modulation

Constellation

QPSK

QPSK

QPSK, 8PSK, 16APSK, 32APSK

QPSK, 8PSK, 8APSK, 16APSK, 32APSK

Channel Coding and Modulation

FEC/ Convolution Rate

1/2, 2/3, 3/4, 5/6, 7/8

1/2, 2/3, 3/4, 5/6, 7/8

QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10

QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10, 2/3-L, 32/45, 11/15, 7/9

Channel Coding and Modulation

Roll-off Factor

0.2,0.25,0.35

0.2,0.25,0.35

0.2, 0.25, 0.35

0.05, 0.10, 0.15, 0.2, 0.25, 0.35

Channel Coding and Modulation

Symbol Rate

0.05~45Msps

0.05~45Msps

0.05~40Msps (32APSK); 0.05~45Msps (16APSK/8PSK/QPSK)

0.05~40Msps(32APSK,32APSK-L); 0.05~45 Mbps (16APSK/8PSK/QPSK/16APSK-L/8APSK-L)

Channel Coding and Modulation

BISS Scramble

Mode 1, Mode E

Mode 1, Mode E

Mode 1, Mode E

Mode 1, Mode E

System

Web-server NMS

Web-server NMS

Web-server NMS

Web-server NMS

Web-server NMS

System

Language: English

Language: English

Language: English

Language: English

Language: English

System

Ethernet software upgrade

Ethernet software upgrade

Ethernet software upgrade

Ethernet software upgrade

Ethernet software upgrade

Miscellaneous

Dimension

Dimension

482mm×410mm×44mm

482mm×410mm×44mm

482mm×410mm×44mm

Miscellaneous

Temperature

Temperature

0~45■(operation), -20~80■ (storage)

0~45■(operation), -20~80■ (storage)

0~45■(operation), -20~80■ (storage)

Miscellaneous

Power

Power

100-240VAC±10%,50Hz-60Hz

100-240VAC±10%,50Hz-60Hz

100-240VAC±10%,50Hz-60Hz

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.[Order Guide](#)

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive

services, and satellite applications.

FU-4513E

FU-4513F

FU-4514

FU-4514F

DVB-S/S2

-
-
-
-

DVB- S2X

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

-
-

RF output (950-2150MHz)

-

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

-

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

IF output (50- 960MHz)

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

-

FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting,

interactive services, and satellite applications.



FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications. FMUSER FUQ-4514G is a DVB-S2X compliant IF modulator that converts ASI and IP inputs to digital DVB-S/S2/S2X IF output. It modulates signals and applies BISS scrambling for secure distribution. Control is enabled via Web-server NMS and front panel LCD. Ideal for broadcasting, interactive services, and satellite applications.

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact: Tomleequan Email sales@fmuser.com whatsapp: +8613922702227