

FMUSER FUQ-4515 Satellite Modem 1x Ethernet Port IP Input-Output DVB-S2-DVB-S TCP Acceleration High-Speed Two-Way Transmission for Satellite Networks Product Overview



The FMUSER FUQ-4515 is a two-way DVB-S2 satellite modem for efficient IP data transmission over satellite. It modulates and demodulates IP signals using TCP acceleration to optimize performance. Featuring web-based NMS with LCD and keyboard support, it simplifies management. Ideal for satellite networks in broadcast, enterprise, and remote data services.

Key feature


Supports DVB-S2 and legacy DVB-S standards for efficient satellite communication.

Embedded TCP acceleration optimizes high-speed links and heavy traffic.

High throughput up to 100 Mbps for upstream and downstream operations.

Web-based NMS operation with LCD and keyboard support for easy management.

Principle Chart

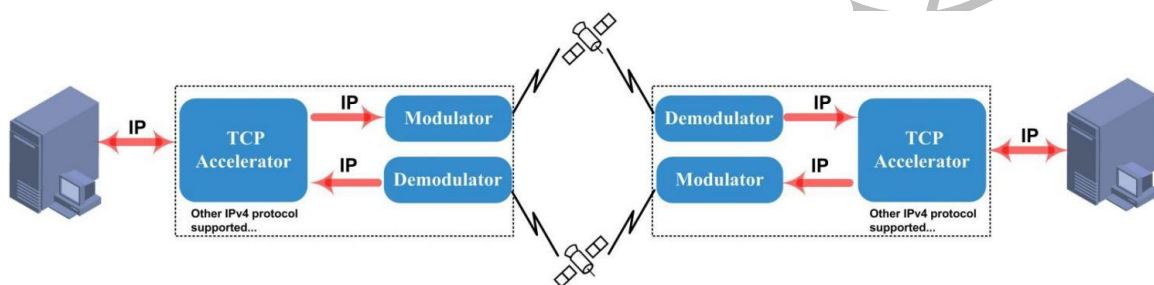

Specifications

Input/Output	IP input/output over IPv4 (TCP/UDP/ICMP...) protocol 1 tuner in and 1 RF out	IP input/output over IPv4 (TCP/UDP/ICMP...) protocol 1 tuner in and 1 RF out	IP input/output over IPv4 (TCP/UDP/ICMP...) protocol 1 tuner in and 1 RF out
Tuner Section	DVB-S2	Input Frequency	950-2150MHz
Tuner Section	DVB-S2	Symbol rate	QPSK 1~45Mbauds; 8PSK 2~30Mbauds
Tuner Section	DVB-S2	Code rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	DVB-S2	Constellation	QPSK, 8PSK
RF output	RF Range	950 ~ 2150 MHz, 10KHz step	950 ~ 2150 MHz, 10KHz step
RF output	Output Level Attenuation	0 dBm~-31.5 dBm, 0.5dB Step	0 dBm~-31.5 dBm, 0.5dB Step
RF output	MER	≥40dB	≥40dB
RF output	Connector	N type, impedance 50Ω	N type, impedance 50Ω
Modulation	Standard	DVB-S2	DVB-S2
Modulation	Outer coding	BCH Coding	BCH Coding
Modulation	Inner coding	LDPC Coding	LDPC Coding
Modulation	Constellation	QPSK, 8PSK, 16APSK, 32APSK	QPSK, 8PSK, 16APSK, 32APSK
Modulation	FEC/ Convolution Rate	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Modulation	Roll-off Factor	0.2, 0.25, 0.35	0.2, 0.25, 0.35
Modulation	Symbol Rate	0.05~40Msps (32APSK); 0.05~45Msps (QPSK/ 8PSK/16APSK)	0.05~40Msps (32APSK); 0.05~45Msps (QPSK/ 8PSK/16APSK)
System	LCD/keyboard operating, web-based NMS manage	LCD/keyboard operating, web-based NMS manage	LCD/keyboard operating, web-based NMS manage

System	Language: English/Chinese	Language: English/Chinese	Language: English/Chinese
System	Ethernet software & hardware upgrade	Ethernet software & hardware upgrade	Ethernet software & hardware upgrade
Miscellaneous	Dimension	482mm×328mm×44m m (W× L× H)	482mm×328mm×44m m (W× L× H)
Miscellaneous	Temperature	0~45■ (work), -20~80■■■Storage■	0~45■ (work), -20~80■■■Storage■
Miscellaneous	Power	AC 100V-220V±10%, 50/60Hz	AC 100V-220V±10%, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)