

**FFMUSER FUQ-4619A FUQ-4619B IPTV Gateway Server 7 IP Input Channels
SRT-HTTP-UDP-RTP-RTSP-HLS to SRT-HTTP-UDP-HLS-RTMP Protocol Conversion
Web-Based NMS Hotel TV CATV System**



SRT/HTTP/UDP/RTP/RTSP/HLS  **SRT/HTTP/UDP/HLS/RTMP**



Product overview

The FMUSER FUQ-4619A/FUQ-4619B IPTV Gateway Server integrates an IP Gateway and IPTV server for protocol conversion and streaming media distribution. It handles inputs such as SRT, HTTP, UDP, RTP, RTSP, and HLS, converting to outputs including SRT, HTTP, UDP, HLS, and RTMP. Managed via web-based NMS through the DATA port, it suits small CATV headend systems and hotel TV applications for efficient media delivery.

Key feature


Integrated Design: Combines IP Gateway and IPTV server in one unit for streamlined operation.

Protocol Conversion: Converts inputs like SRT, HTTP, UDP, RTP, RTSP, and HLS to outputs such as SRT, HTTP, UDP, HLS, and RTMP.


IPTV Functionality: Supports live channels, VOD, hotel services, and customizable interfaces via FMUSER IPTV APK.

Web Management: Controlled through web-based NMS for easy configuration and monitoring.

IP Protocol Conversion

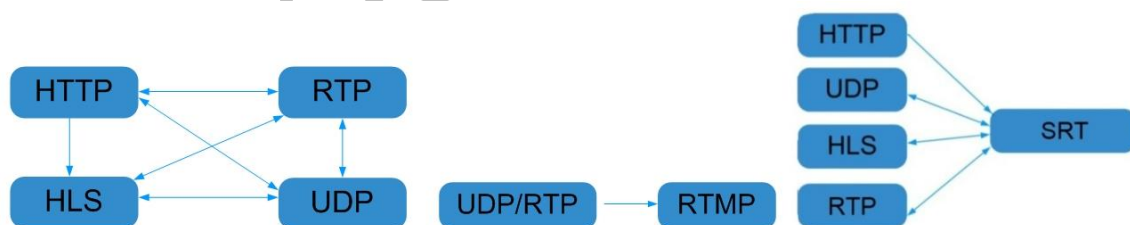

General Principle Chart

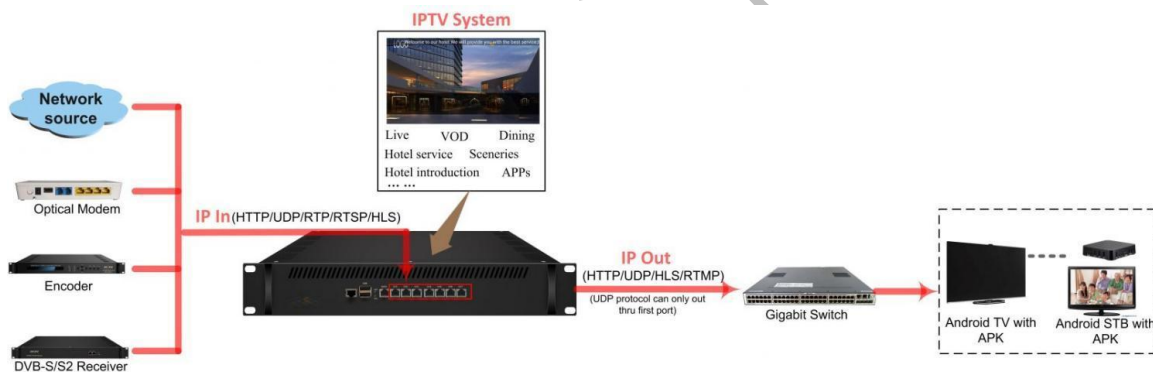

Specifications

IP Input	DATA CH 1-7 (1000M) ports: IP input over SRT, HTTP, UDP (SPTS), RTP (SPTS), RTSP (over UDP, payload: mpeg TS) and HLS	DATA CH 1-7 (1000M) ports: IP input over SRT, HTTP, UDP (SPTS), RTP (SPTS), RTSP (over UDP, payload: mpeg TS) and HLS
IP Input	TS files uploading through Web management	TS files uploading through Web management

IP output	First Data port (1000M): IP out over SRT, HTTP (Unicast), UDP (SPTS, Multicast) HLS and RTMP (Program source should be H.264 and AAC encoding)	First Data port (1000M): IP out over SRT, HTTP (Unicast), UDP (SPTS, Multicast) HLS and RTMP (Program source should be H.264 and AAC encoding)
IP output	DATA CH 1-7 (1000M) ports: IP out over HTTP/HLS/RTMP (Unicast) SFP+ output 10000M (for FU-4619S-I and FU-4619I)	DATA CH 1-7 (1000M) ports: IP out over HTTP/HLS/RTMP (Unicast) SFP+ output 10000M (for FU-4619S-I and FU-4619I)
System	Channel switching time with FMUSER' STB: HTTP (1-3s), HLS (0.4-0.7s)	Channel switching time with FMUSER' STB: HTTP (1-3s), HLS (0.4-0.7s)
System	Play programs with APK downloaded android STB and TV	Play programs with APK downloaded android STB and TV
System	About 80 HD/SD programs (Bitrate at 2Mbps) when HTTP/RTP/RTSP/HLS is converted into UDP (Multicast), the actual application shall prevail, and suggest maximum 80% CPU utilization	About 80 HD/SD programs (Bitrate at 2Mbps) when HTTP/RTP/RTSP/HLS is converted into UDP (Multicast), the actual application shall prevail, and suggest maximum 80% CPU utilization
System	IPTV system function	support Live channel, VOD, Hotel introduction, Dining, Hotel service, APPS, scenery introduction and so on (Please install FMUSER IPTV APK)
System	IPTV system main interface	support adding scrolling caption, welcome words, pictures, advertisement, video, music (Please install FMUSER IPTV APK)
System	web-based NMS management thru DATA port	web-based NMS management thru DATA port
General	Demission	482.6mm×328mm×88mm (W×L×H)
General	Temperature	0~45■(operation), -20~80■(storage)

General	Power Supply	AC100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz
---------	--------------	---

Test data for reference:

Protocol Conversion	Programs	Bitrate	Terminals	Terminals	CPU Utilization
Protocol Conversion	Programs	Bitrate	FU-4619S-M	FU-4619I	CPU Utilization
HTTP/RTP/R TSP/HLS to UDP	80	2M	---	---	55%
HTTP to HTTP	30	2M	300	600	80%
HTTP to HTTP	50	2M	160	320	80%
HTTP to HLS	50	2M	400	800	46%
UDP to HLS	50	2M	400	800	50%
UDP to HLS	80	2M	300	600	72%
UDP to HTTP	50	2M	240	480	50%
UDP to SRT	50	2M	---	---	50%
UDP to SRT	50	2M	---	---	75%

Order Guide:

Model No.	Feature	SFP+	Memory	CPU	Solid-State Disk (SSD)	Mechanical Hard Disk
FU-4619F-M	Gateway+IPTV server	/	8G	i5/i7 (3rd Generation)	120G/240G random	/
FU-4619S-M	Gateway+IPTV server	/	8G	i5/i7 (3rd Generation)	120G/240G random	4T
FU-4619S-I	Gateway+IPTV server	1	8G	i3 (6th Generation)	120G/240G random	/
FU-4619I	Gateway+IPTV server	1	16G	i7 (6th Generation)	120G/240G random	4T

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227

FMUSER 广州艾盛