


FMUSER FUQ-4619B-K IPTV Gateway 7-IP Inputs 1-Data Output
SRT-HTTP-UDP-RTP-RTSP-HLS-TS to SRT-HTTP-UDP-HLS-RTMP Protocol
Conversion 8GB RAM Dual 1000M IP Ports Web-Based NMS Hospitality TV & ISP
Multicast Product overview

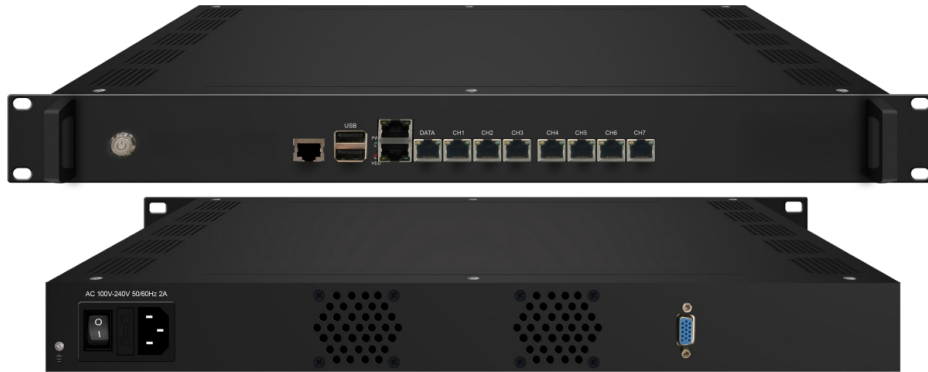



The FMUSER FUQ-4619B-K IPTV Gateway performs multi-protocol conversion across 7 input ports (CH1-7) and 1 data output port, transforming SRT/HTTP/UDP/RTP/RTSP/HLS/TS streams into SRT/HTTP/UDP/HLS/RTMP formats. It processes 80 concurrent HD/SD programs (2Mbps) via UDP Multicast with $\leq 80\%$ CPU load, managed through web-based NMS. This 1U rack-mount device integrates 8GB RAM and dual 1000M IP ports, designed for hospitality TV systems and ISP multicast distribution.

Key feature

Equipped with 8GB RAM + 120GB SSD (expandable to 240GB) for high-throughput operation

IP Protocol Conversion

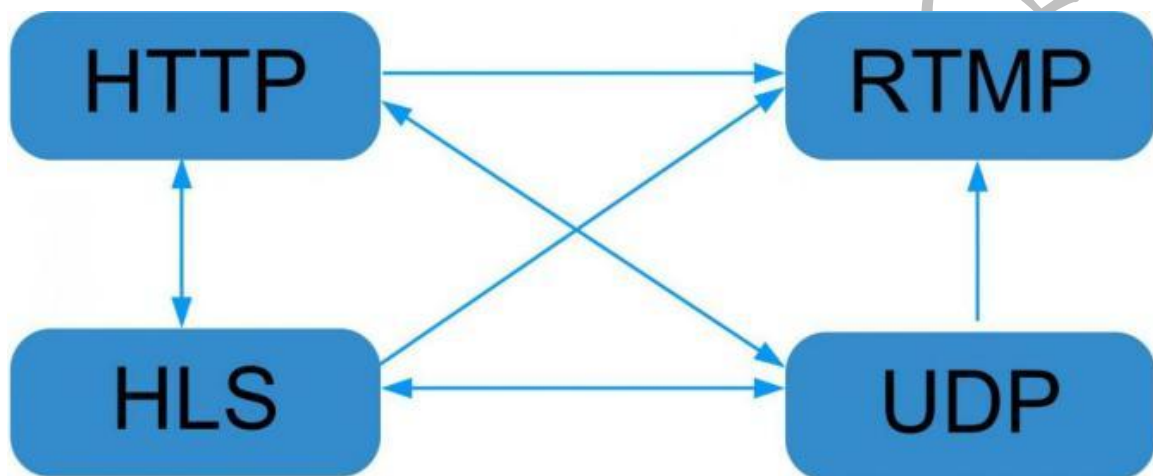

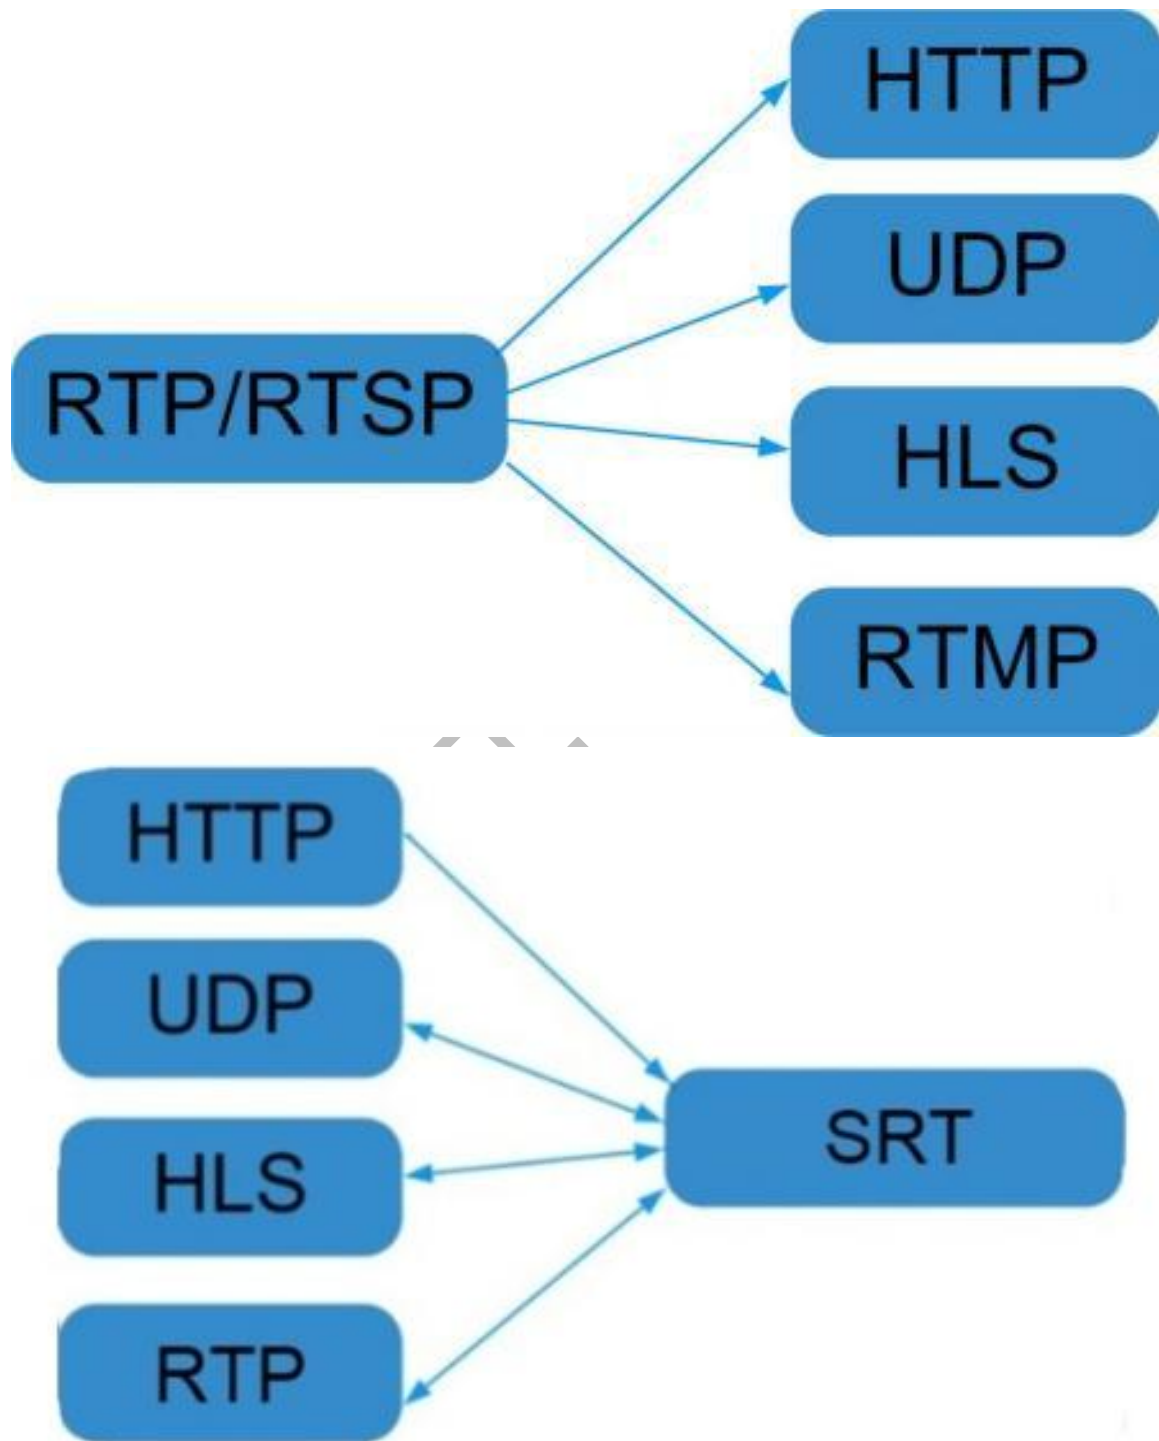

General Principle Chart



Scrolling caption/welcome words/boot image/boot video is only applicable to IP out application and the STB/Android TV must be installed Dexin IPTV APK

Specifications

Input	IP input thru CH 1-7(1000M) over SRT, HTTP, UDP(SPTS), RTP(SPTS), RTSP (over UDP, payload: mpeg TS) and HLS	IP input thru CH 1-7(1000M) over SRT, HTTP, UDP(SPTS), RTP(SPTS), RTSP (over UDP, payload: mpeg TS) and HLS
Input	TS files uploading through Web management	TS files uploading through Web management
IP output	IP out thru Data port (1000M) over SRT, HTTP (Unicast), UDP(SPTS, Multicast) HLS and RTMP(Program source should be H.264 and AAC encoding)	IP out thru Data port (1000M) over SRT, HTTP (Unicast), UDP(SPTS, Multicast) HLS and RTMP(Program source should be H.264 and AAC encoding)
System	Memory:	8G
System	Solid-State Disk(SSD): 120G (240G optional)	Solid-State Disk(SSD): 120G (240G optional)
System	Channel switching time with FMUSER' STB: HTTP (1-3s), HLS (0.4-0.7s)	Channel switching time with FMUSER' STB: HTTP (1-3s), HLS (0.4-0.7s)
System	Support adding scrolling caption, welcome words, boot image and boot video (this function is only applicable to IP out application and the STB/Android TV must be installed FMUSER IPTV APK)	Support adding scrolling caption, welcome words, boot image and boot video (this function is only applicable to IP out application and the STB/Android TV must be installed FMUSER IPTV APK)

System	Play programs with APK downloaded android STB and TV, maximum 150 terminals(See details in below Test data for reference)	Play programs with APK downloaded android STB and TV, maximum 150 terminals(See details in below Test data for reference)
System	Support about 80 HD/SD programs (Bitrate:2Mbps) When SRT/HTTP/RTP/RTSP/HLS is converted into UDP (Multicast), the actual application shall prevail, and suggest maximum 80% CPU utilization	Support about 80 HD/SD programs (Bitrate:2Mbps) When SRT/HTTP/RTP/RTSP/HLS is converted into UDP (Multicast), the actual application shall prevail, and suggest maximum 80% CPU utilization
System	web-based NMS management thru DATA port	web-based NMS management thru DATA port
General	Demission	482mm×324mm×44mm (WxLxH)
General	Temperature	0~45■(operation), -20~80■(storage)
General	Power Supply	AC100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz

Test data for reference:

Protocol conversion	Programs	Bitrate	Terminals	CPU utilization
HTTP/RTP/RTSP/HLS to UDP	80	2M	---	55%
HTTP to HTTP	30	2M	300	80%
HTTP to HTTP	50	2M	160	80%
HTTP to HLS	50	2M	400	46%
UDP to HLS	50	2M	400	50%
UDP to HLS	80	2M	300	72%
UDP to HTTP	50	2M	240	50%
UDP to SRT	50	2M	---	50%
UDP to SRT	80	2M	---	75%

Order Guide:

		3508F-M	3508S-M	3508I
Size	Size	1U	2U	2U
Hardware	Memory	8G	8G	16G
Hardware	Solid-State Disk(SSD)	120G SSD	120G SSD	120G SSD
Hardware	Mechanical Hard Disk	/	4T SATA	4T SATA
Data Port Number	Data Port Number	8	8	9
10G Port (SFP+)	10G Port (SFP+)	/	/	SFP+
Middleware	Middleware	live+IPTV	live+IPTV	live+IPTV
load capacity	Input Channels	HD■8M■*40	HD■8M■*40	HD■8M■*60
load capacity	User Number	120	120	600
VOD load		≤20	≤50	≤50

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)