
***FMUSER FUQ-4619B ASI to IP Gateway 8-Channel ASI Input 1 GE IP Output
UDP-RTP-RTSP BISS Descrambling SPTS Conversion for Broadcast Headend***




Product overview

The FUQ-4619B ASI to IP Gateway converts 8x ASI signals to IP streams (UDP/RTP/RTSP) with BISS Mode 1/E descrambling. It processes inputs into SPTS outputs (256/32/20 modes) at up to 800Mbps via 1 GE port. This 1RU rack-mount device supports dual control via LCD/keyboard or SNMP/Web. Ideal for satellite content distribution and multi-platform IPTV headends requiring secure, high-throughput conversion.

Key feature

Dual control via LCD/keyboard and SNMP/Web interfaces

Principle Chart

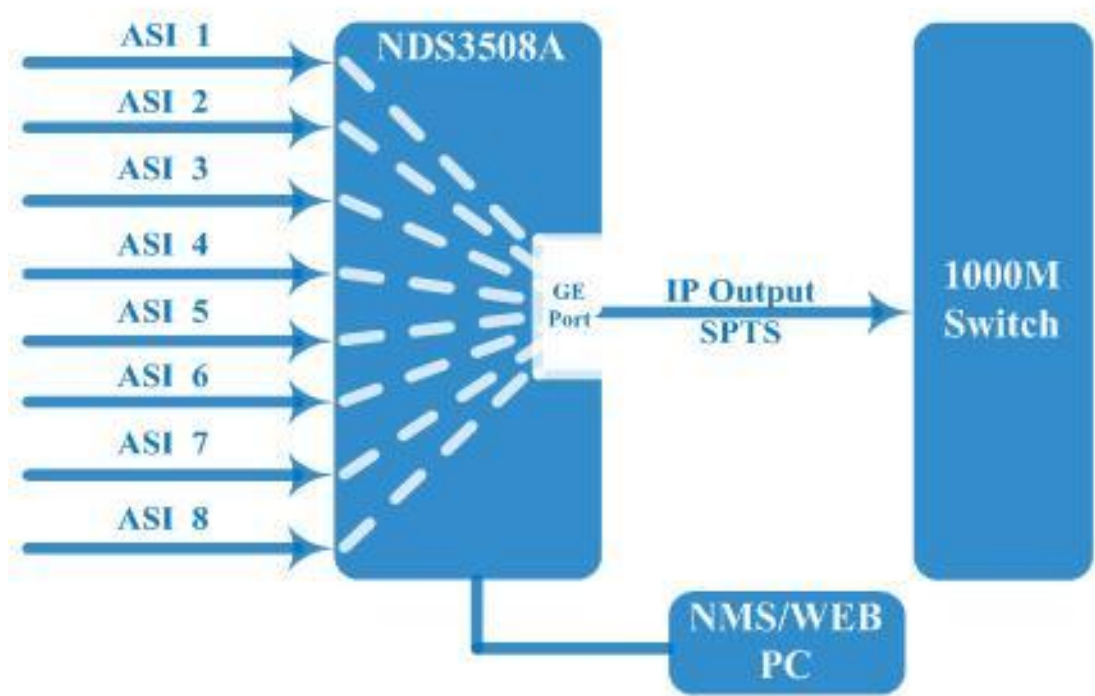

Specification

Input	8 ASI input	8 ASI input
Output	1 GE output, UDP, RTP/RTSP protocol, unicast and Multicast 256 SPTS output — Without BISS function and IP null packet filter 32 SPTS output — Without BISS function 20 SPTS output — With BISS function	1 GE output, UDP, RTP/RTSP protocol, unicast and Multicast 256 SPTS output — Without BISS function and IP null packet filter 32 SPTS output — Without BISS function 20 SPTS output — With BISS function
BISS descrambling	Mode 1, Mode E	Mode 1, Mode E
Transmission Bit-rate	Transmission Bit-rate	Maximum total bit-rate is 400Mbps—256 SPTS output
Transmission Bit-rate	Transmission Bit-rate	Maximum total bit-rate is 800Mbps—32/20 SPTS output
General	Dimension(WxLxH)	482mm×410mm×44mm
General	Weight	3.6kg
General	Temperature	0~45℃(working) -20~80℃(storage)
General	Power supply	100~240VAC 50/60Hz

General	consumption	20W
---------	-------------	-----

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227