

**FUQ-4619C Tuner to IP Gateway 24 Tuners 2 ASI 1 USB Inputs DVB-S-S2-S2X
DVB-C-T-T2 ISDB-T 1024 SPTS 27 MPTS IP Streaming BISS Descrambling Web GUI
Broadcast Headend Product overview**



The FUQ-4619C Tuner to IP Gateway converts signals from 24 FTA tuners, 2 DVB-ASI inputs, and 1 USB input into IP outputs. It processes signals with switchable MPTS (bypass) or SPTS modes and embedded BISS descrambling. Managed via Web GUI, it delivers up to 1024 SPTS streams over UDP/RTP/RTSP. This 1RU device is ideal for broadcast headends and IPTV distribution requiring flexible signal conversion.

Key feature


Supports 24 multi-standard tuners (switchable DVB-S/S2/S2X, DVB-C/T/T2, ISDB-T) plus 2 ASI inputs and 1 USB input.

Integrates BISS descrambling for Mode 1 and Mode E on tuner inputs.

Provides switchable MPTS/SPTS outputs (27 MPTS with Null PKT Filter or 1024 SPTS over dual DATA ports via UDP/RTP/RTSP).

Enables Web-based management for configuration, PID filtering, remapping, and updates.

Includes DiSEqC support for satellite signal control.

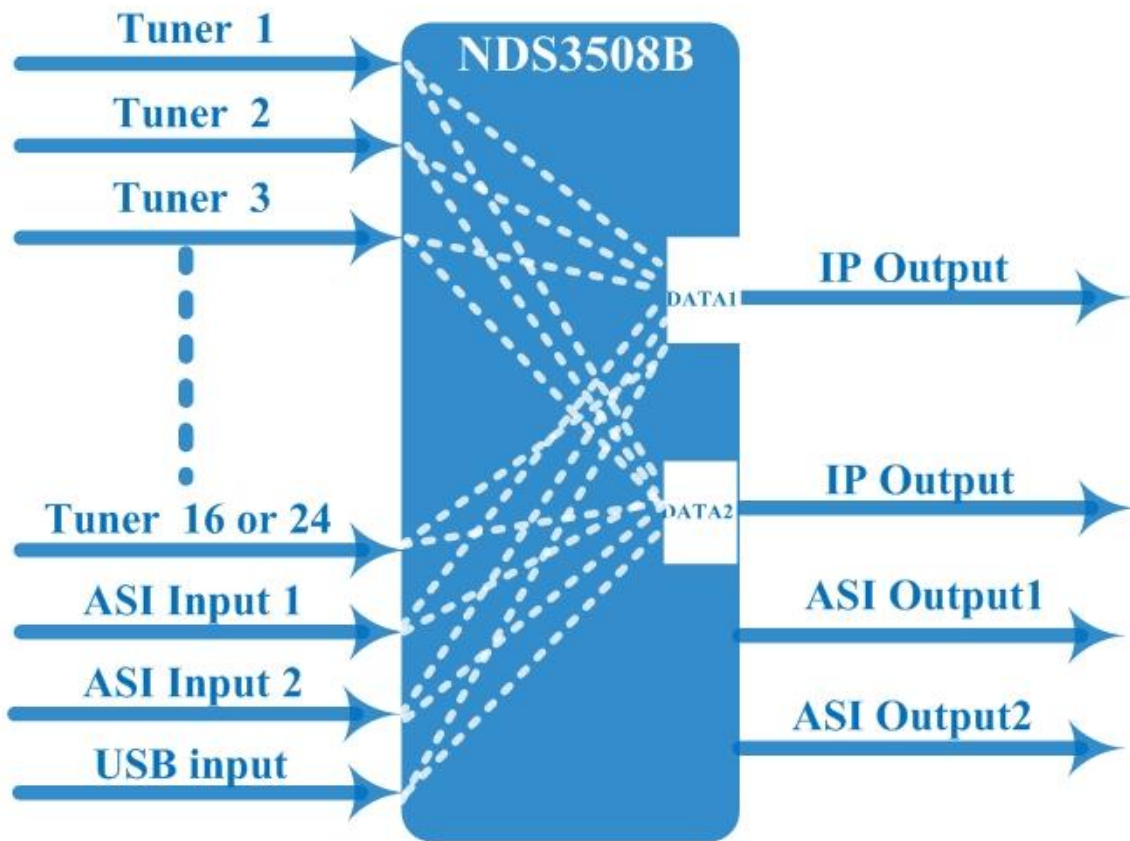

Specifications

Input	Input	24 tuners inputs +2 ASI inputs +1 USB inputs	24 tuners inputs +2 ASI inputs +1 USB inputs	24 tuners inputs +2 ASI inputs +1 USB inputs
Satellite	DVB-S	Frequency In	Frequency In	950~2150MHz
Satellite	DVB-S	Symbol rate	Symbol rate	0.5~45Msps
Satellite	DVB-S	Signal Strength	Signal Strength	- 65- -25dBm
Satellite	DVB-S	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Satellite	DVB-S	Constellation	Constellation	QPSK
Satellite	DVB-S	Max input bitrate	Max input bitrate	≤125 Mbps
Satellite	DVB-S2	Frequency In	Frequency In	950~2150MHz
Satellite	DVB-S2	Symbol rate	Symbol rate	QPSK/8PSK /16APSK :0.5~45 Msps 32APSK: 0.5~34Msps;

Satellite	DVB-S2	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Satellite	DVB-S2	Constellation	Constellation	QPSK, 8PSK, 16APSK, 32APSK
Satellite	DVB-S2	Max input bitrate	Max input bitrate	≤125 Mbps
Satellite	DVB-S2X	Frequency In	Frequency In	950~2150MHz
Satellite	DVB-S2X	Symbol rate	Symbol rate	QPSK/8PSK :0.5~45 Msps 16APSK: 0.5~40Msps 32APSK: 0.5~34Msps
Satellite	DVB-S2X	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10, 2/3-L, 32/45, 11/15, 7/9
Satellite	DVB-S2X	Constellation	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Satellite	DVB-S2X	Max input bitrate	Max input bitrate	≤125 Mbps

Multi-Mode Switchable Tuner Inputs	DVB-C	Standard	Standard	J.83A(DVB-C), J.83B, J.83C
Multi-Mode Switchable Tuner Inputs	DVB-C	Frequency In	Frequency In	50~960MHz
Multi-Mode Switchable Tuner Inputs	DVB-C	Constellation	Constellation	16/32/64/128/256 QAM
Multi-Mode Switchable Tuner Inputs	DVB-T/T2	Frequency In	Frequency In	50~960MHz
Multi-Mode Switchable Tuner Inputs	DVB-T/T2	Bandwidth	Bandwidth	6/7/8 M bandwidth
Multi-Mode Switchable Tuner Inputs	ISDB-T	Frequency In	Frequency In	50~960MHz
BISS Descrambling	BISS Descrambling	Mode 1, Mode E	Mode 1, Mode E	Mode 1, Mode E
Output	Output	1024 SPTS IP output over UDP and RTP/RTSP protocol through DATA1 and DATA2 port (IP address and port number of DATA1 and DATA2 are different), Unicast and Multicast	1024 SPTS IP output over UDP and RTP/RTSP protocol through DATA1 and DATA2 port (IP address and port number of DATA1 and DATA2 are different), Unicast and Multicast	1024 SPTS IP output over UDP and RTP/RTSP protocol through DATA1 and DATA2 port (IP address and port number of DATA1 and DATA2 are different), Unicast and Multicast
Output	Output	27 MPTS IP output (for Tuner/ASI/USB bypass) over UDP and RTP/RTSP protocol through DATA1 and DATA2 port, Unicast and Multicast	27 MPTS IP output (for Tuner/ASI/USB bypass) over UDP and RTP/RTSP protocol through DATA1 and DATA2 port, Unicast and Multicast	27 MPTS IP output (for Tuner/ASI/USB bypass) over UDP and RTP/RTSP protocol through DATA1 and DATA2 port, Unicast and Multicast

Output	Output	2 ASI outputs(MPTS out mode only, mirror ports to output the same one TS)	2 ASI outputs(MPTS out mode only, mirror ports to output the same one TS)	2 ASI outputs(MPTS out mode only, mirror ports to output the same one TS)
System	System	Web based management	Web based management	Web based management
System	System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Miscellaneous	Dimension	482mm×270mm×44mm (W×L×H)	482mm×270mm×44mm (W×L×H)
Miscellaneous	Miscellaneous	Environment	0~45■(work); -20~80■Storage■	0~45■(work); -20~80■Storage■
Miscellaneous	Miscellaneous	Power requirements	100~240VAC, 50/60Hz	100~240VAC, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)