

FUQ-4619C IP Gateway 24-Tuner DVB-S-DVB-S2-DVB-S2X Input, 1024 SPTS 26 MPTS IP Output Dual GE Ports BISS Descrambling Broadcast Headend IPTV Delivery




Product overview

The FUQ-4619C IP gateway receives DVB-S/S2/S2X signals via 24 tuners or optional ASI/USB inputs. It converts satellite feeds into 26 MPTS or 1024 SPTS IP streams through dual GE ports, featuring BISS descrambling and PID filtering. The 1RU rack-mount unit supports web-based control with DiSEqC compatibility. Ideal for broadcast contribution links, IPTV headends, and multi-screen delivery systems requiring high-density satellite-to-IP conversion.

Key feature

Web Control: Browser-based management with DiSEqC 1.0/1.2 support for LNB configuration

Working Principle

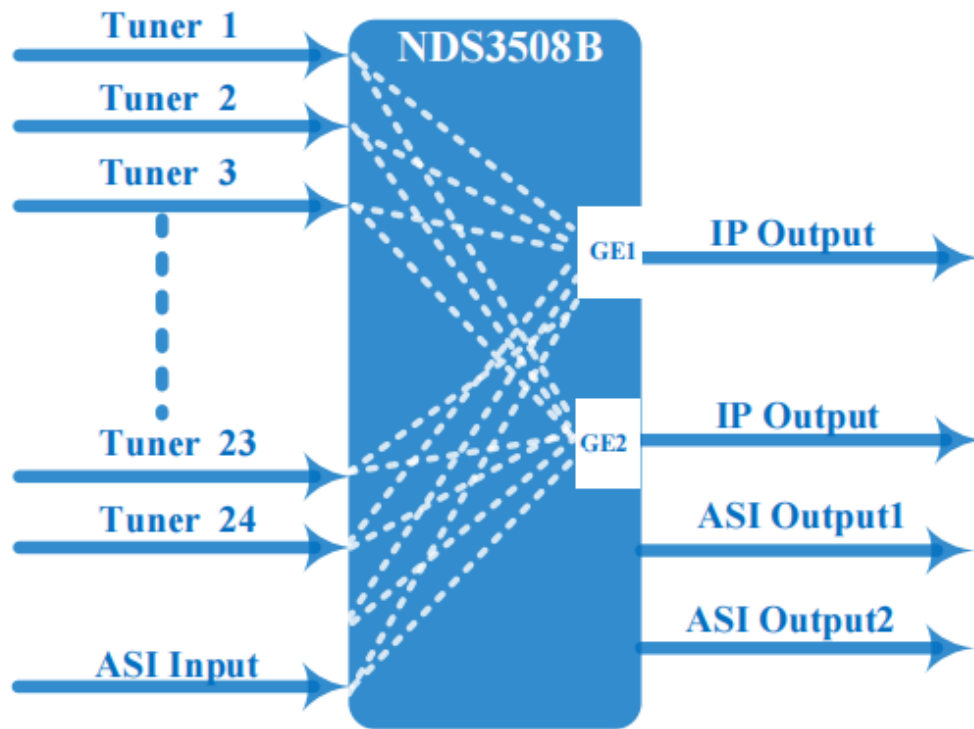

Specifications

Input	16 or 24 tuners input +1 ASI input +1 USB input---SPTS/MPTS output	16 or 24 tuners input +1 ASI input +1 USB input---SPTS/MPTS output	16 or 24 tuners input +1 ASI input +1 USB input---SPTS/MPTS output	16 or 24 tuners input +1 ASI input +1 USB input---SPTS/MPTS output
Satellite	DVB-S	Frequency In	Frequency In	950~2150MHz
Satellite	DVB-S	Symbol rate	Symbol rate	0.5~45Msps
Satellite	DVB-S	Signal Strength	Signal Strength	- 65- -25dBm
Satellite	DVB-S	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Satellite	DVB-S	Constellation	Constellation	QPSK
Satellite	DVB-S	Max input bitrate	Max input bitrate	≤125 Mbps
Satellite	DVB-S2	Frequency In	Frequency In	950~2150MHz
Satellite	DVB-S2	Symbol rate	Symbol rate	QPSK/8PSK /16APSK :0.5~45 Msps 32APSK: 0.5~34Msps;

Satellite	DVB-S2	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Satellite	DVB-S2	Constellation	Constellation	QPSK, 8PSK, 16APSK, 32APSK
Satellite	DVB-S2	Max input bitrate	Max input bitrate	≤125 Mbps
Satellite	DVB-S2X	Frequency In	Frequency In	950~2150MHz
Satellite	DVB-S2X	Symbol rate	Symbol rate	QPSK/8PSK :0.5~45 Msps 16APSK: 0.5~40Msps 32APSK: 0.5~34Msps
Satellite	DVB-S2X	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10, 2/3-L, 32/45, 11/15, 7/9
Satellite	DVB-S2X	Constellation	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Satellite	DVB-S2X	Max input bitrate	Max input bitrate	≤125 Mbps

BISS Descrambling	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)
Output	1024 SPTS IP output over UDP and RTP/RTSP protocol through GE1 and GE2 port (IP address and port number of GE1 and GE2 are different) , Unicast and Multicast	1024 SPTS IP output over UDP and RTP/RTSP protocol through GE1 and GE2 port (IP address and port number of GE1 and GE2 are different) , Unicast and Multicast	1024 SPTS IP output over UDP and RTP/RTSP protocol through GE1 and GE2 port (IP address and port number of GE1 and GE2 are different) , Unicast and Multicast	1024 SPTS IP output over UDP and RTP/RTSP protocol through GE1 and GE2 port (IP address and port number of GE1 and GE2 are different) , Unicast and Multicast
Output	26 MPTS IP output (for Tuner/ ASI/USB pass-through) over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	26 MPTS IP output (for Tuner/ ASI/USB pass-through) over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	26 MPTS IP output (for Tuner/ ASI/USB pass-through) over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	26 MPTS IP output (for Tuner/ ASI/USB pass-through) over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast
Output	2 ASI output	2 ASI output	2 ASI output	2 ASI output
System	Web based management	Web based management	Web based management	Web based management
System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension	Dimension	482mm×230mm×44mm (W×L×H)	482mm×230mm×44mm (W×L×H)
Miscellaneous	Approx weight	Approx weight	2.5 kg	2.5 kg
Miscellaneous	Environment	Environment	0~45℃(work); -20~80℃Storage	0~45℃(work); -20~80℃Storage
Miscellaneous	Power requirements	Power requirements	100~240VAC, 50/60Hz	100~240VAC, 50/60Hz
Miscellaneous	Power consumption	Power consumption	20W	20W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227