

**FMUSER FUQ-4633 HD Encoder Modulator 1 HDMI Input DVB-T
RF Output MPEG-4 AVC/H.264 Encoding All-in-One Signal
Conversion for Broadcast Security Hospitality**



HDMI → **DVB-T RF**

--- *Home Version*



A device that allows audio and video signal input in TV distributions with applications in home entertainment, Digital Signage for hotels, shops, restaurants etc...

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

((HDCP))

USB

H.264
MPEG-4/AVC

Full HD
1080


Product overview

The FMUSER FUQ-4633 HD Encoder Modulator integrates 1 HDMI input and RF output with MPEG-4 AVC/H.264 encoding and DVB-T modulation. It processes audio/video signals by encoding and modulating them for RF transmission. This device is ideal for home entertainment, surveillance systems, and commercial applications like hotel digital signage.


Key feature

- Supports H.264 video encoding with auto detect for MP@L 3.0/3.1/4.0.
- Features MPEG-1 Layer 2 and MPEG-2 AAC audio encoding.

- Provides RF output at 142.5-858 MHz with adjustable level from -14 to +6 dBm.
- Includes 1 HDMI input for simplified source connectivity.
- Enables system upgrades via USB port with external disk support.

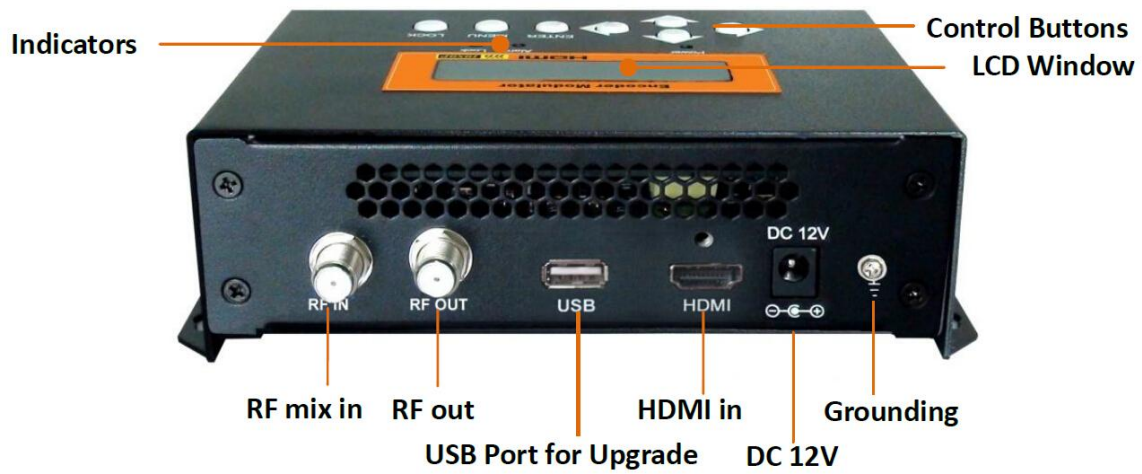

System Connection

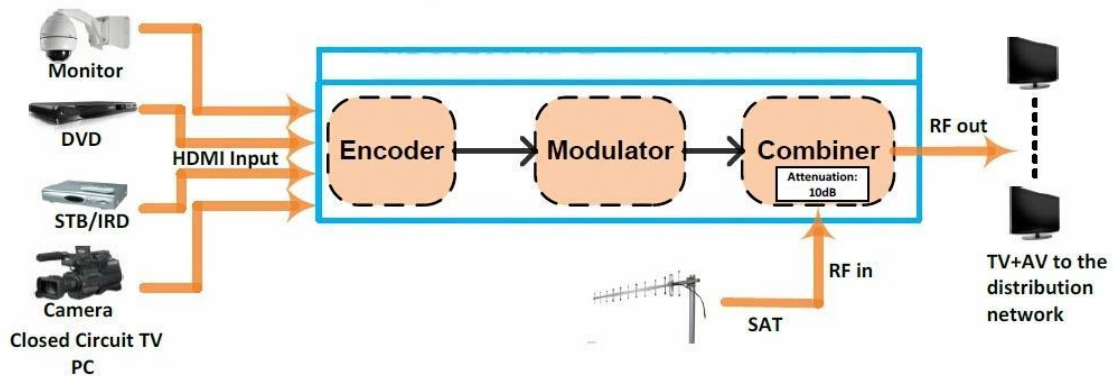

Technical Specifications

HDMI Encoding Section			
Video	Encoding	H.264 MP@L 3.0/3.1/4.0	
	Interface	HDMI*1	
		Input	Output
	Resolution	480@59.94/60i	480@30p
		576@50i	576@25p
		720@50/59.94/60p	720@50/59.94/60p
		1080@50i	1080@25p
		1080@59.94/60i	1080@30p
		1080@59.94/60p	1080@30p
	Aspect Ratio	16:9, 4:3	
Bit rate	1.000~18.000 Mbps		
Audio	Encoding	MPEG1 layer 2	
	Sample rate	48KHz	
	Bit rate	64, 96,128, 192, 256, 320kbps	
DVB-T Modulator Section			
Standard		DVB-T COFDM	
Bandwidth		6M, 7M, 8M	

Constellation	QPSK, 16QAM, 64QAM
Code rate	1/2, 2/3, 3/4, 5/6, 7/8
Guard Interval	1/32, 1/16, 1/8, 1/4
Transmission Mode:	2K, 8K
MER	≥31dB
RF frequency	142.5~858 MHz, 1KHz step
RF output level	-14~ +6dBm, 0.1db step
System	
RF mix in ATT	10 dB
Management	Local LCD + control buttons
Language	English
LCN Insertion	yes
Upgrade	USB
General	
Power supply	DC 12V
Dimensions	153*110*50mm
Weight	< 1kg

Typical Applications

...for communities of residents
an information channel on their television



...for restaurants
information about daily menus ,special deals,etc



...for hotels
meeting rooms,exhibitions,message,etc



...for hospitals
training courses, healthy guide, etc



...for Public Spaces
advertising,user information,news,etc



...for shopping centres
new collections,special deals,etc



Create your own advertising and information channel using only your Encoder Modulator

Main Technical Comparison between FU-4633 and FU-4667 (HD, DVB-T Version)

Items	FU-4633	FU-4667 (HD, DVB-T)
Interface	HDMI	HDMI/YPbPr/CVBS/S-Video
Video Encoding	H.264 MP@L 3.0/3.1/4.0 Auto detect and configure	H.264 BP/MP/HP@L 3.0/3.1/3.2/4.0/4.1/4.2 Profile and level can be manually set
Resolutions	Input and output scanning format and frame rate change	Input and output scanning format and frame rate keep the same
Audio Encoding	MPEG1 layer 2, MPEG-2 AAC	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC
MER	≥31dB	≥42dB

RF Frequency	142.5~858 MHz	30~960MHz
Output Level	-14~ +6dBm	-16~ -36dBm
USB (External USB Disk)	System upgrade	System upgrade, TS record and playback

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227