

FMUSER FUQ-4633C HDMI-CVBS Input HD-SD Encoder Modulator ISDB-T-DVB-T Dual Standard H.264 Encoding RF Output for Surveillance Digital Signage



▶ HDMI/CVBS ➡ ISDB-T/DVB-T Encoder & Modulator

▶ ISDB-T/DVB-T RF in one device, **Modulation dynamic switching**

--- Home Version



A device that allows audio and video signal input in TV distributions with applications in home entertainment, Digital Signage for hotels, shops, restaurants etc...

Product overview


The FMUSER FUQ-4633C is an HD/SD encoder modulator that accepts HDMI and CVBS inputs and outputs ISDB-T or DVB-T RF signals. It encodes video using H.264 MPEG-4 AVC and modulates for RF transmission. With local LCD control and USB upgrade, it supports easy configuration. Ideal for home entertainment, surveillance systems, and digital signage broadcasting.

Key feature

- Supports dual-standard modulation: ISDB-T (ARIB STD-B31) and DVB-T (COFDM) with 6M/7M/8M bandwidths.

- Features H.264 MPEG-4 AVC video encoding at 1.000-18.000 Mbps and MPEG-1 Layer 2 audio at 48KHz.
- Accepts HDMI and CVBS inputs, handling resolutions up to 1080p/i.
- Provides adjustable RF output with 150-950MHz frequency range and -47 to 0 dBm level.
- Includes local LCD management and USB upgrade for system maintenance.

System Connection

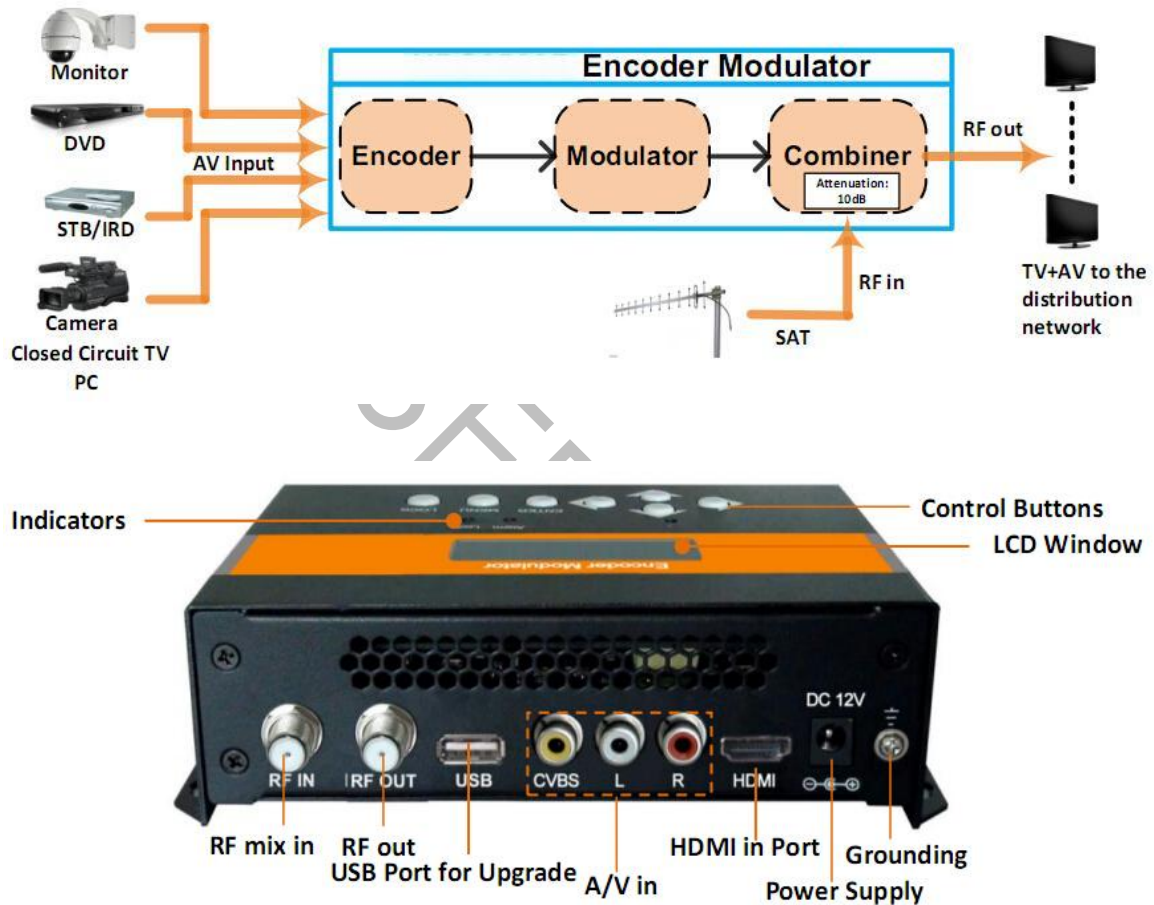

Technical Specifications


HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section
Video	Encoding	Encoding	H.264 MP@L 3.0/3.1/4.0	H.264 MP@L 3.0/3.1/4.0	H.264 MP@L 3.0/3.1/4.0	H.264 MP@L 3.0/3.1/4.0
Video	Interface	Interface	HDMI*1	HDMI*1	HDMI*1	HDMI*1
Video			Input	Input	Output	Output

Video	Resolution	Resolution	480@59.94 /60p	480@59.94 /60p	480@60p	480@60p
Video	Resolution	Resolution	480@59.94 /60i	480@59.94 /60i	480@30p	480@30p
Video	Resolution	Resolution	576@50i	576@50i	576@25p	576@25p
Video	Resolution	Resolution	720@50/59.94/60p	720@50/59.94/60p	720@50/59.94/60p	720@50/59.94/60p
Video	Resolution	Resolution	1080@50i	1080@50i	1080@25p	1080@25p
Video	Resolution	Resolution	1080@59.94/60i	1080@59.94/60i	1080@30p	1080@30p
Video	Resolution	Resolution	1080@59.94/60p	1080@59.94/60p	1080@30p	1080@30p
Video	Aspect Ratio	Aspect Ratio	16:9, 4:3	16:9, 4:3	16:9, 4:3	16:9, 4:3
Video	Bit rate	Bit rate	1.000~18.000 Mbps	1.000~18.000 Mbps	1.000~18.000 Mbps	1.000~18.000 Mbps
Audio	Encoding	Encoding	MPEG1 layer 2	MPEG1 layer 2	MPEG1 layer 2	MPEG1 layer 2
Audio	Sample rate	Sample rate	48KHz	48KHz	48KHz	48KHz
	Bit rate	Bit rate	64, 96,128, 192, 256, 320kbps	64, 96,128, 192, 256, 320kbps	64, 96,128, 192, 256, 320kbps	64, 96,128, 192, 256, 320kbps
CVBS Encoding Section	CVBS Encoding Section	CVBS Encoding Section	CVBS Encoding Section	CVBS Encoding Section	CVBS Encoding Section	CVBS Encoding Section
Video	Encoding	Encoding	Encoding	H.264 MP@L 3.0	H.264 MP@L 3.0	H.264 MP@L 3.0
Video	Interface	Interface	Interface	CVBS*1 (RCA)	CVBS*1 (RCA)	CVBS*1 (RCA)
Video	Resolution	Resolution	Resolution	Input	Input	Output
Video	Resolution	Resolution	Resolution	480@60p	480@60p	480@60p
Video	Resolution	Resolution	Resolution	480@60i	480@60i	480@30p
Video	Resolution	Resolution	Resolution	576@50p	576@50p	576@50p
Video				576@50i	576@50i	576@25p

Video	Aspect Ratio	Aspect Ratio	Aspect Ratio	4:3	4:3	4:3
Video	Bit rate	Bit rate	Bit rate	1.000~18.000 Mbps	1.000~18.000 Mbps	1.000~18.000 Mbps
Audio	Encoding	Encoding	Encoding	MPEG1 layer 2	MPEG1 layer 2	MPEG1 layer 2
Audio	Interface	Interface	Interface	Analog Stereo/Mono (Unbalanced RCA)	Analog Stereo/Mono (Unbalanced RCA)	Analog Stereo/Mono (Unbalanced RCA)
Audio	Sample rate	Sample rate	Sample rate	48KHz	48KHz	48KHz
Audio	Bit rate	Bit rate	Bit rate	64, 96,128, 192, 256, 320kbps	64, 96,128, 192, 256, 320kbps	64, 96,128, 192, 256, 320kbps
ISDB-T Modulator Section	ISDB-T Modulator Section	ISDB-T Modulator Section	ISDB-T Modulator Section	ISDB-T Modulator Section	ISDB-T Modulator Section	ISDB-T Modulator Section
Standard	Standard	ARIB STD-B31	ARIB STD-B31	ARIB STD-B31	ARIB STD-B31	ARIB STD-B31
Bandwidth	Bandwidth	6M	6M	6M	6M	6M
Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Guard Interval	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4
Transmission Mode	Transmission Mode	2K, 4K, 8K	2K, 4K, 8K	2K, 4K, 8K	2K, 4K, 8K	2K, 4K, 8K
MER	MER	≥30dB	≥30dB	≥30dB	≥30dB	≥30dB
RF frequency	RF frequency	150~950MHz, 0.1MHz step	150~950MHz, 0.1MHz step	150~950MHz, 0.1MHz step	150~950MHz, 0.1MHz step	150~950MHz, 0.1MHz step
RF output level	RF output level	-47~ 0 dBm (60~107 dBμV), 1db step	-47~ 0 dBm (60~107 dBμV), 1db step	-47~ 0 dBm (60~107 dBμV), 1db step	-47~ 0 dBm (60~107 dBμV), 1db step	-47~ 0 dBm (60~107 dBμV), 1db step
DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section

Standard	Standard	DVB-T COFDM	DVB-T COFDM	DVB-T COFDM	DVB-T COFDM	DVB-T COFDM
Bandwidth	Bandwidth	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M
Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Code rate	Code rate	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Guard Interval	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4
Transmission Mode:	Transmission Mode:	2K, 8K	2K, 8K	2K, 8K	2K, 8K	2K, 8K
MER	MER	≥31dB	≥31dB	≥31dB	≥31dB	≥31dB
RF frequency	RF frequency	150~950 MHz, 0.1KHz step	150~950 MHz, 0.1KHz step	150~950 MHz, 0.1KHz step	150~950 MHz, 0.1KHz step	150~950 MHz, 0.1KHz step
RF output level	RF output level	-47~ 0 dBm (60~107 dBμV), 1db step	-47~ 0 dBm (60~107 dBμV), 1db step	-47~ 0 dBm (60~107 dBμV), 1db step	-47~ 0 dBm (60~107 dBμV), 1db step	-47~ 0 dBm (60~107 dBμV), 1db step
System	System	System	System	System	System	System
RF mix in ATT	RF mix in ATT	10 dB	10 dB	10 dB	10 dB	10 dB
Management	Management	Local LCD + control buttons	Local LCD + control buttons	Local LCD + control buttons	Local LCD + control buttons	Local LCD + control buttons
Language	Language	English	English	English	English	English
Upgrade	Upgrade	USB	USB	USB	USB	USB
General	General	General	General	General	General	General
Power supply	Power supply	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V
Dimensions	Dimensions	183*110*50 mm	183*110*50 mm	183*110*50 mm	183*110*50 mm	183*110*50 mm
Weight	Weight	< 1kg	< 1kg	< 1kg	< 1kg	< 1kg

Typical Applications

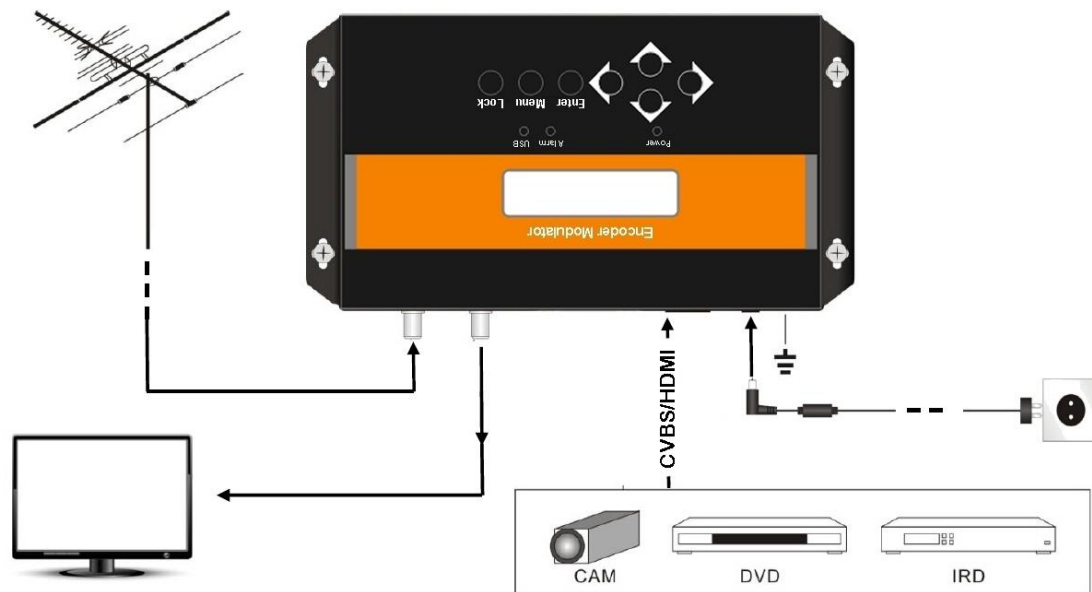

...for communities of residents
an information channel on their television



...for restaurants
information about daily menus ,special deals,etc



...for hotels
meeting rooms,exhibitions,message,etc



...for hospitals
training courses, healthy guide, etc



...for Public Spaces
adversing,user information,news,etc



...for shopping centres
new collections,special deals,etc



**Create your own advertising and information
channel using only your NDS3522B Encoder Modulator**

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)