

FMUSER FUQ-4635S HDMI Encoder Modulator 4 HDMI Inputs 2 RF DVB-C-T Outputs MPEG-4 AVC H.264 CATV Headend IPTV System



OSD (Logo/PPT/Caption/QR Code) Insertion




Product Overview

The FUQ-4635S/FUQ-4639S integrates MPEG-4 AVC/H.264 encoding and DVB-C/T modulation in a 1RU chassis, supporting 4/8 HDMI inputs, 64/128 IP streams, and 2/4 RF carriers. It processes signals with PID remapping and PSI/SI editing, delivering MPTS via Gigabit Ethernet. Controlled via web interface, this unit is designed for hotel TV systems, CATV headends, and multi-dwelling unit deployments.


Key feature

Provides web-based control for configuration and monitoring

Principle Chart

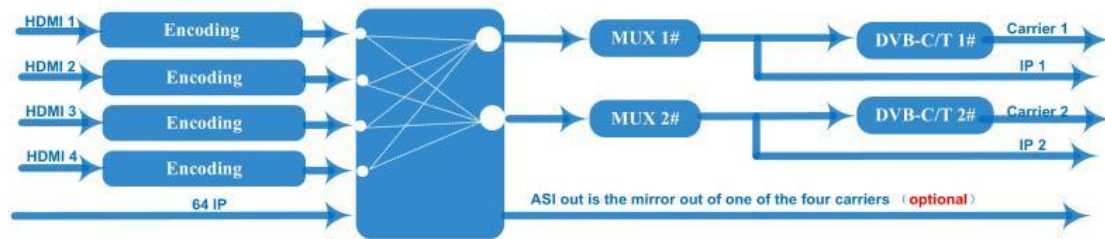

NDS3524S

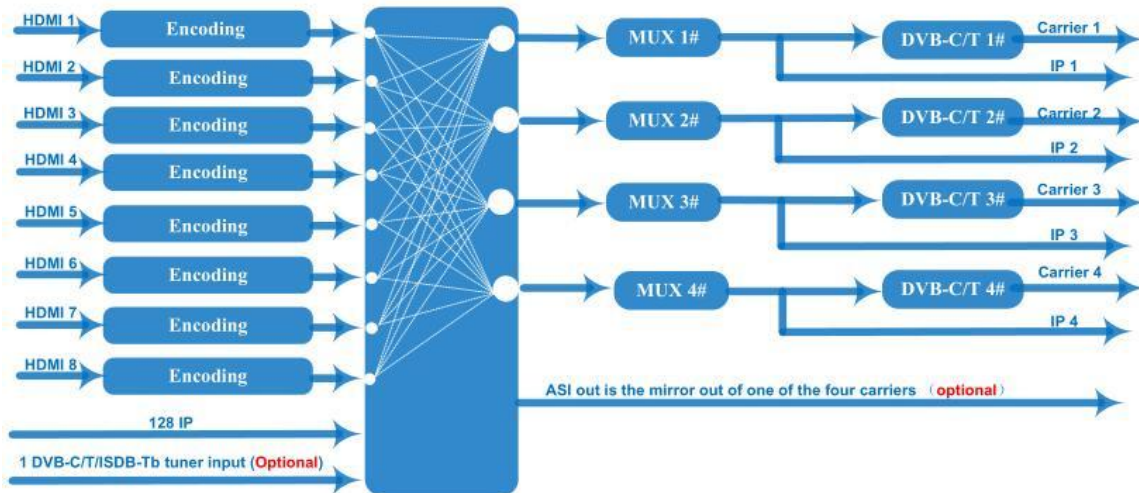

Technical Specification

Input	4/8 HDMI inputs; 64/128 IP inputs; 1 DVB-C/T/ISDB-Tb tuner input for re-mux (Optional for FU-4639S with DVB-C RF out version)	4/8 HDMI inputs; 64/128 IP inputs; 1 DVB-C/T/ISDB-Tb tuner input for re-mux (Optional for FU-4639S with DVB-C RF out version)	4/8 HDMI inputs; 64/128 IP inputs; 1 DVB-C/T/ISDB-Tb tuner input for re-mux (Optional for FU-4639S with DVB-C RF out version)	4/8 HDMI inputs; 64/128 IP inputs; 1 DVB-C/T/ISDB-Tb tuner input for re-mux (Optional for FU-4639S with DVB-C RF out version)	4/8 HDMI inputs; 64/128 IP inputs; 1 DVB-C/T/ISDB-Tb tuner input for re-mux (Optional for FU-4639S with DVB-C RF out version)	4/8 HDMI inputs; 64/128 IP inputs; 1 DVB-C/T/ISDB-Tb tuner input for re-mux (Optional for FU-4639S with DVB-C RF out version)
Video	Encoding	MPEG-4 AVC/H.264	MPEG-4 AVC/H.264	MPEG-4 AVC/H.264	MPEG-4 AVC/H.264	MPEG-4 AVC/H.264

Video	Resolution	In-put	In-put	1920×1080_60P, 1920×1080_60i, 1920×1080_50P, 1920×1080_50i, 1280×720_60P, 1280×720_50P, 720×576_50i, 720×480_60i,	1920×1080_60P, 1920×1080_60i, 1920×1080_50P, 1920×1080_50i, 1280×720_60P, 1280×720_50P, 720×576_50i, 720×480_60i,	1920×1080_60P, 1920×1080_60i, 1920×1080_50P, 1920×1080_50i, 1280×720_60P, 1280×720_50P, 720×576_50i, 720×480_60i,
Video	Resolution	Out-put	Out-put	1920×1080_30P, 1920×1080_25P, 1280×720_30P, 1280×720_25P, 720×576_25P, 720×480_30P,	1920×1080_30P, 1920×1080_25P, 1280×720_30P, 1280×720_25P, 720×576_25P, 720×480_30P,	1920×1080_30P, 1920×1080_25P, 1280×720_30P, 1280×720_25P, 720×576_25P, 720×480_30P,
Video	Bit-rate	1Mbps~13Mbps each channel	1Mbps~13Mbps each channel	1Mbps~13Mbps each channel	1Mbps~13Mbps each channel	1Mbps~13Mbps each channel
Video	Rate Control	CBR/VBR	CBR/VBR	CBR/VBR	CBR/VBR	CBR/VBR
Audio	Encoding	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass Through	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass Through	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass Through	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass Through	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass Through
Audio	Sampling rate	48KHz	48KHz	48KHz	48KHz	48KHz
Audio	Resolution	24-bit	24-bit	24-bit	24-bit	24-bit
Audio	Audio Gain	0-255 Adjustable	0-255 Adjustable	0-255 Adjustable	0-255 Adjustable	0-255 Adjustable

Audio	MPEG-1 Layer 2 bit-rate	48/56/64/8 0/96/112/1 28/160/192 /224/256/3 20/384 kbps	48/56/64/8 0/96/112/1 28/160/192 /224/256/3 20/384 kbps	48/56/64/8 0/96/112/1 28/160/192 /224/256/3 20/384 kbps	48/56/64/8 0/96/112/1 28/160/192 /224/256/3 20/384 kbps	48/56/64/8 0/96/112/1 28/160/192 /224/256/3 20/384 kbps
Audio	LC-AAC bit-rate	48/56/64/8 0/96/112/1 28/160/192 /224/256/3 20/384 kbps	48/56/64/8 0/96/112/1 28/160/192 /224/256/3 20/384 kbps	48/56/64/8 0/96/112/1 28/160/192 /224/256/3 20/384 kbps	48/56/64/8 0/96/112/1 28/160/192 /224/256/3 20/384 kbps	48/56/64/8 0/96/112/1 28/160/192 /224/256/3 20/384 kbps
Audio	HE-AAC bit-rate	48/56/64/8 0/96/112/1 28 kbps	48/56/64/8 0/96/112/1 28 kbps	48/56/64/8 0/96/112/1 28 kbps	48/56/64/8 0/96/112/1 28 kbps	48/56/64/8 0/96/112/1 28 kbps
Multiplexing	Maximum PID Remapping	180 input per channel	180 input per channel	180 input per channel	180 input per channel	180 input per channel
Multiplexing	Function	PID remapping (automatic ally or manually)	PID remapping (automatic ally or manually)	PID remapping (automatic ally or manually)	PID remapping (automatic ally or manually)	PID remapping (automatic ally or manually)
Multiplexing	Function	Generate PSI/ SI table autom atically	Generate PSI/ SI table autom atically	Generate PSI/ SI table autom atically	Generate PSI/ SI table autom atically	Generate PSI/ SI table autom atically
Scrambling (optional for FU-4639S with DVB-C RF out version)	Maximum simulcrypt CA	4	4	4	4	4
Scrambling (optional for FU-4639S with DVB-C RF out version)	Standard	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197

Scrambling (optional for FU-4639S with DVB-C RF out version)	Connection	Local/remote connection	Local/remote connection	Local/remote connection	Local/remote connection	Local/remote connection
Modulation	DVB-C	RF out	RF out	RF out	2/4*RF DVB-C out (2/4 carriers combined output), F type interface	2/4*RF DVB-C out (2/4 carriers combined output), F type interface
Modulation	DVB-C	Standard	Standard	Standard	EN300 429/ITU-T J.83A/B	EN300 429/ITU-T J.83A/B
Modulation	DVB-C	MER	MER	MER	≥40db	≥40db
Modulation	DVB-C	RF frequency	RF frequency	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step
Modulation	DVB-C	RF output level	RF output level	RF output level	-25~-1dBm (82~105 dBμV), 0.1dBm	-25~-1dBm (82~105 dBμV), 0.1dBm
Modulation	DVB-C	Symbol Rate	Symbol Rate	Symbol Rate	5.0Msps~7.0Msps, 1ksps stepping	5.0Msps~7.0Msps, 1ksps stepping
Modulation	DVB-C				J.83A	J.83B
Modulation	DVB-C	Constellation	Constellation	Constellation	16/32/64/128/256QAM	64/256 QAM
Modulation	DVB-C	Bandwidth	Bandwidth	Bandwidth	8M	6M

Modulation	DVB-T	RF out	RF out	RF out	2/4*RF COFDM DVB-T out (2/4 carriers combined output) ,F type interface	2/4*RF COFDM DVB-T out (2/4 carriers combined output) ,F type interface
Modulation	DVB-T	Standard	Standard	Standard	EN300744	EN300744
Modulation	DVB-T	FFT mode	FFT mode	FFT mode	2K,	2K,
Modulation	DVB-T	Bandwidth	Bandwidth	Bandwidth	6M, 7M, 8M	6M, 7M, 8M
Modulation	DVB-T	Constellation	Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Modulation	DVB-T	Guard Interval	Guard Interval	Guard Interval	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32
Modulation	DVB-T	FEC	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	DVB-T	MER	MER	MER	≥42 dB	≥42 dB
Modulation	DVB-T	RF frequency	RF frequency	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step
Modulation	DVB-T	RF output level	RF output level	RF output level	-28~ -3 dBm (77~97 dBμV), 0.1db step	-28~ -3 dBm (77~97 dBμV), 0.1db step
Stream output	2/4 IP MPTS output over UDP/RTP/ RTSP, 1*1000M Base-T Ethernet interface	2/4 IP MPTS output over UDP/RTP/ RTSP, 1*1000M Base-T Ethernet interface	2/4 IP MPTS output over UDP/RTP/ RTSP, 1*1000M Base-T Ethernet interface	2/4 IP MPTS output over UDP/RTP/ RTSP, 1*1000M Base-T Ethernet interface	2/4 IP MPTS output over UDP/RTP/ RTSP, 1*1000M Base-T Ethernet interface	2/4 IP MPTS output over UDP/RTP/ RTSP, 1*1000M Base-T Ethernet interface
System function	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)

System function	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension (W×L×H)	Dimension (W×L×H)	482mm×328mm×44mm	482mm×328mm×44mm	482mm×328mm×44mm	482mm×328mm×44mm
Miscellaneous	Environment	Environment	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■
Miscellaneous	Power requirements	Power requirements	AC 110V±10%, 50/60Hz, AC 220 ±10%, 50/60Hz	AC 110V±10%, 50/60Hz, AC 220 ±10%, 50/60Hz	AC 110V±10%, 50/60Hz, AC 220 ±10%, 50/60Hz	AC 110V±10%, 50/60Hz, AC 220 ±10%, 50/60Hz

Order Guide

	FU-4635S	FU-4639S (DVB-C Out)	FU-4639S (DVB-T Out)
HDMI input	4	8	8
IP input	64	128	128
1 DVB-C/T/ISDB-Tb tuner input	N/A	Option as order	N/A
Scrambling function	N/A	Option as order	N/A
IP output	2 MPTS	4 MPTS	4 MPTS
DVB-C/T RF output channel	2	4	4

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact: Tomleequan Email sales@fmuser.com whatsapp: [+8613922702227](tel:+8613922702227)