

FMUSER FUQ-4637TB Encoder Modulator 16 CVBS Inputs 4 DVB-C-T Outputs MPEG4 AVC-H264 Encoding Multiplexing Web Management for CATV Broadcasting



OSD (Logo/PPT/Caption/QR Code) Insertion



Product Overview

The FMUSER FUQ-4637SB is a cost-effective encoder modulator with 16 CVBS inputs, 128 IP inputs, and 4ch DVB-C/T outputs. It performs MPEG4 AVC/H.264 encoding and multiplexing for signal processing. Controlled via web management, it supports real-time monitoring. Ideal for CATV broadcasting systems in next-gen deployments.

Key feature

Supports 16 CVBS inputs with MPEG4 AVC/H.264 encoding for robust video processing.


Features 128 IP inputs over UDP/RTP for re-mux and 4MPTS IP output, plus optional ASI output.

Provides 4ch DVB-C/T non-adjacent carrier outputs with multiplexing and optional scrambling.

Includes audio encoding (MPEG1 Layer II) with gain adjustment and PSI/SI editing support.

Offers web management for easy control, updates, and bit-rate monitoring.

Principle Chart

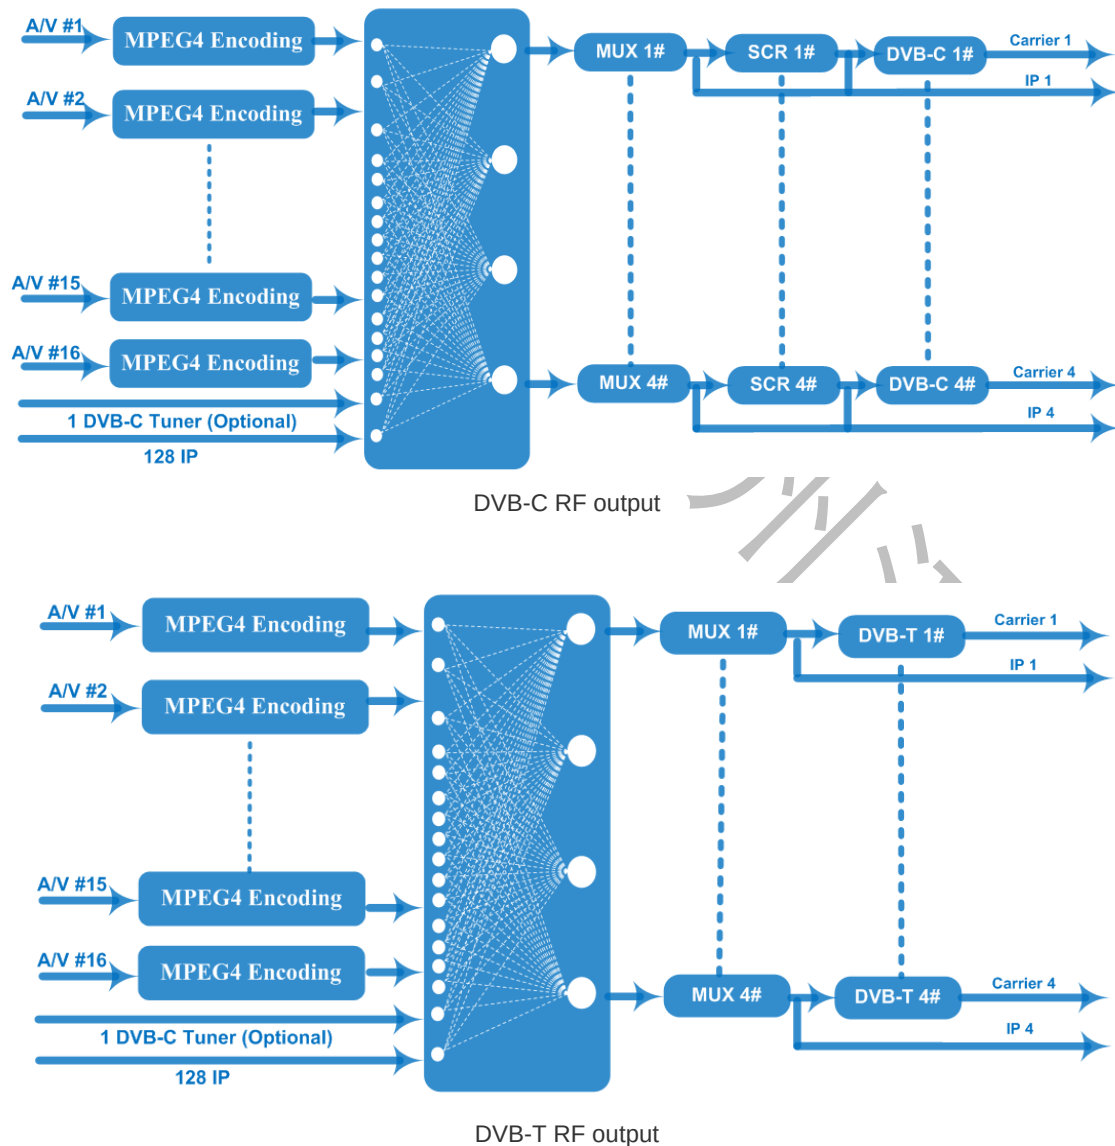

Technical Specification

Input	16 CVBS inputs , DB15 -To-RCA interface 128 IP (100/1000M)input over UDP and RTP protocol 1DVB-C tuner input for re-mux (optional)	16 CVBS inputs , DB15 -To-RCA interface 128 IP (100/1000M)input over UDP and RTP protocol 1DVB-C tuner input for re-mux (optional)	16 CVBS inputs , DB15 -To-RCA interface 128 IP (100/1000M)input over UDP and RTP protocol 1DVB-C tuner input for re-mux (optional)	16 CVBS inputs , DB15 -To-RCA interface 128 IP (100/1000M)input over UDP and RTP protocol 1DVB-C tuner input for re-mux (optional)	16 CVBS inputs , DB15 -To-RCA interface 128 IP (100/1000M)input over UDP and RTP protocol 1DVB-C tuner input for re-mux (optional)
Video	Resolution	720×576i (PAL-B, D, G, H, I), 720×480i (NTSC-M, J)	720×576i (PAL-B, D, G, H, I), 720×480i (NTSC-M, J)	720×576i (PAL-B, D, G, H, I), 720×480i (NTSC-M, J)	720×576i (PAL-B, D, G, H, I), 720×480i (NTSC-M, J)
Video	Encoding	MPEG4 AVC/H.264(HP/MP/BP)	MPEG4 AVC/H.264(HP/MP/BP)	MPEG4 AVC/H.264(HP/MP/BP)	MPEG4 AVC/H.264(HP/MP/BP)
Video	Bit-rate	1Mbps~5Mbps each channel	1Mbps~5Mbps each channel	1Mbps~5Mbps each channel	1Mbps~5Mbps each channel
Video	Rate Control	CBR/VBR	CBR/VBR	CBR/VBR	CBR/VBR
Video	GOP Structure	IPP (P frame is adjustable)	IPP (P frame is adjustable)	IPP (P frame is adjustable)	IPP (P frame is adjustable)
Audio	Encoding	MPEG-1 Layer 2	MPEG-1 Layer 2	MPEG-1 Layer 2	MPEG-1 Layer 2
Audio	Sampling rate	48KHz	48KHz	48KHz	48KHz
Audio	Resolution	24-bit	24-bit	24-bit	24-bit
Audio	Audio Gain	0-255 adjustable	0-255 adjustable	0-255 adjustable	0-255 adjustable
Audio	Bit-rate	64/128/192/224/256/320/384Kbps each channel	64/128/192/224/256/320/384Kbps each channel	64/128/192/224/256/320/384Kbps each channel	64/128/192/224/256/320/384Kbps each channel

Modulation	DVB-C	4* DVB-C non-adjacent carriers Standard: EN300 429/ITU-T J.83A/B MER: $\geq 40\text{dB}$ RF frequency: 50~960MHz, 1KHz step RF out level: -20~+3dBm (87~110 dB μ V), 0.1dB step Symbol Rate: 5.0Msps~7.0 Msps, 1ksps step	4* DVB-C non-adjacent carriers Standard: EN300 429/ITU-T J.83A/B MER: $\geq 40\text{dB}$ RF frequency: 50~960MHz, 1KHz step RF out level: -20~+3dBm (87~110 dB μ V), 0.1dB step Symbol Rate: 5.0Msps~7.0 Msps, 1ksps step	4* DVB-C non-adjacent carriers Standard: EN300 429/ITU-T J.83A/B MER: $\geq 40\text{dB}$ RF frequency: 50~960MHz, 1KHz step RF out level: -20~+3dBm (87~110 dB μ V), 0.1dB step Symbol Rate: 5.0Msps~7.0 Msps, 1ksps step	4* DVB-C non-adjacent carriers Standard: EN300 429/ITU-T J.83A/B MER: $\geq 40\text{dB}$ RF frequency: 50~960MHz, 1KHz step RF out level: -20~+3dBm (87~110 dB μ V), 0.1dB step Symbol Rate: 5.0Msps~7.0 Msps, 1ksps step
Modulation	DVB-C			J.83A	J.83B
Modulation	DVB-C	Constellation	Constellation	16/32/64/128/256QAM	64/256 QAM
Modulation	DVB-C	Bandwidth	Bandwidth	8M	6M
Modulation	DVB-T	Standard	Standard	EN300744	EN300744
Modulation	DVB-T	FFT mode	FFT mode	2K, 4K, 8K	2K, 4K, 8K
Modulation	DVB-T	Bandwidth	Bandwidth	6M, 7M, 8M	6M, 7M, 8M
Modulation	DVB-T	Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Modulation	DVB-T	Guard Interval	Guard Interval	1/4, 1/8, 1/16, 1/32	1/4, 1/8, 1/16, 1/32
Modulation	DVB-T	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Modulation	DVB-T	MER	MER	$\geq 40\text{dB}$	$\geq 40\text{dB}$
Modulation	DVB-T	RF frequency	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step
Modulation	DVB-T	RF out	RF out	4*COFDM DVB-T non-adjacent carriers	4*COFDM DVB-T non-adjacent carriers

Modulation	DVB-T	RF out level	RF out level	-20~+3 dBm (87~110 dBμV), 0.1dB step	-20~+3 dBm (87~110 dBμV), 0.1dB step
Scrambling (for DVB-C out version)	Max simulcrypt CA	4	4	4	4
Scrambling (for DVB-C out version)	Scramble Standard	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197
Scrambling (for DVB-C out version)	Connection	Local/remote connection	Local/remote connection	Local/remote connection	Local/remote connection
Stream output	IP (4*MPTS) output as mirror of 4 carriers over UDP and RTP, 100/1000 Base-T Ethernet interface (Multicast/unicast) 1*ASI output (optional)	IP (4*MPTS) output as mirror of 4 carriers over UDP and RTP, 100/1000 Base-T Ethernet interface (Multicast/unicast) 1*ASI output (optional)	IP (4*MPTS) output as mirror of 4 carriers over UDP and RTP, 100/1000 Base-T Ethernet interface (Multicast/unicast) 1*ASI output (optional)	IP (4*MPTS) output as mirror of 4 carriers over UDP and RTP, 100/1000 Base-T Ethernet interface (Multicast/unicast) 1*ASI output (optional)	IP (4*MPTS) output as mirror of 4 carriers over UDP and RTP, 100/1000 Base-T Ethernet interface (Multicast/unicast) 1*ASI output (optional)
System function	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L×H)	Dimension(W×L×H)	482mm×328mm×44mm	482mm×328mm×44mm	482mm×328mm×44mm
Miscellaneous	Environment	Environment	0~45℃(work) ■-20~80℃■S storage■	0~45℃(work) ■-20~80℃■S storage■	0~45℃(work) ■-20~80℃■S storage■
Miscellaneous	Power requirements	Power requirements	AC 110V±10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V±10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V±10%, 50/60Hz, AC 220 ± 10%, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227