

FMUSER FUQ-4653AB Multi-channel Encoder 8-24 CVBS Input to IP Output MPEG2-MPEG4 AVC-H264 Encoding Multiplexing Digital CATV Satellite Headend



OSD (Logo/PPT/Caption/QR Code) Insertion




Product Overview

The FUQ-4653AB multi-channel encoder performs MPEG-2 and MPEG4 AVC/H.264 encoding and multiplexing. It converts 8/12/16/24 CVBS inputs into IP output streams. This unit offers optional ASI output and is managed via web interface. It provides cost-effective solutions for digital cable TV headends and satellite broadcasting systems.

Key feature

Integrated MPEG-2 and MPEG4 AVC/H.264 video encoding. Supports 8/12/16/24 CVBS inputs with SPTS or MPTS output. Features MPEG1 Layer 2, LC-AAC, and HE-AAC audio encoding. Delivers IP output via UDP, RTP/RTSP + optional ASI copy. Provides management via web interface for control/updates.

Principle Chart

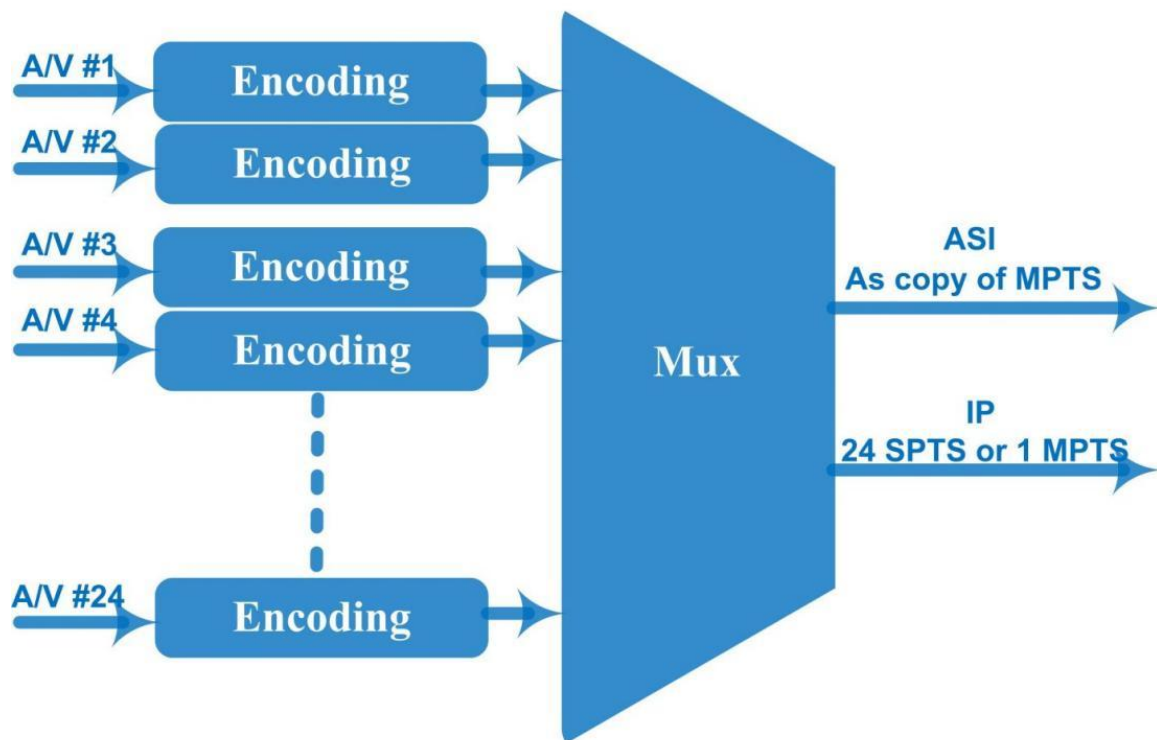

Technical specification

Input	8/12/16/24 CVBS inputs , RCA interface	8/12/16/24 CVBS inputs , RCA interface	8/12/16/24 CVBS inputs , RCA interface	8/12/16/24 CVBS inputs , RCA interface
Video	Resolution	Input	Input	Output
Video	Resolution	720*576@50i	720*576@50i	720*576/352*288 /320*240/320*180/ 176*144/160*120/160*90@50Hz
Video	Resolution	720*480@60i	720*480@60i	720*480/352*288 /320*240/320*180/ 176*144/160*120/160*90@60Hz

Video	Encoding	MPEG-2, MPEG4 AVC/H.264	MPEG-2, MPEG4 AVC/H.264	MPEG-2, MPEG4 AVC/H.264
Video	Bit-rate	0.5~5Mbps	0.5~5Mbps	0.5~5Mbps
Video	Rate Control	CBR/VBR	CBR/VBR	CBR/VBR
Video	GOP Structure	IPPP, IBPBP, IBBPB, IBBBP	IPPP, IBPBP, IBBPB, IBBBP	IPPP, IBPBP, IBBPB, IBBBP
Video	Advanced Pretreatment	De-interlacing, noise reduction	De-interlacing, noise reduction	De-interlacing, noise reduction
Audio	Encoding	MPEG1 Layer 2, LC-AAC, HE-AAC	MPEG1 Layer 2, LC-AAC, HE-AAC	MPEG1 Layer 2, LC-AAC, HE-AAC
Audio	Sampling rate	48KHz	48KHz	48KHz
Audio	Bits per sample	32-bit	32-bit	32-bit
Audio	Bit-rate	48Kbps~384Kbps (each channel)	48Kbps~384Kbps (each channel)	48Kbps~384Kbps (each channel)
Multiplexing	Function	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)
Multiplexing	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Generate PSI/ SI table automatically	Generate PSI/ SI table automatically	Generate PSI/ SI table automatically
Stream output	1 ASI out as copy of MPTS IP output over UDP/RTP/RTSP through Data 1(1000M) or Data 2 (100M) : 8/12 CVBS inputs with 8/12 SPTS and 1 MPTS output 16/24 CVBS inputs with 16/24 SPTS or 1 MPTS output (alternative)	1 ASI out as copy of MPTS IP output over UDP/RTP/RTSP through Data 1(1000M) or Data 2 (100M) : 8/12 CVBS inputs with 8/12 SPTS and 1 MPTS output 16/24 CVBS inputs with 16/24 SPTS or 1 MPTS output (alternative)	1 ASI out as copy of MPTS IP output over UDP/RTP/RTSP through Data 1(1000M) or Data 2 (100M) : 8/12 CVBS inputs with 8/12 SPTS and 1 MPTS output 16/24 CVBS inputs with 16/24 SPTS or 1 MPTS output (alternative)	1 ASI out as copy of MPTS IP output over UDP/RTP/RTSP through Data 1(1000M) or Data 2 (100M) : 8/12 CVBS inputs with 8/12 SPTS and 1 MPTS output 16/24 CVBS inputs with 16/24 SPTS or 1 MPTS output (alternative)

System function	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System function	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L×H)	Dimension(W×L×H)	482mm×410mm×44mm	482mm×410mm×44mm
Miscellaneous	Approx weight	Approx weight	8kg	8kg
Miscellaneous	Environment	Environment	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■
Miscellaneous	Power requirements	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz
Miscellaneous	Power consumption	Power consumption	20W	20W

Order Information

	FU-4653KB-8	FU-4653KB-12	FU-4653KB-16	FU-4653KB-24
8 CVBS Input	√			
12 CVBS Input		√		
16 CVBS Input			√	
24CVBS Input				√

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email: sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)