

FMUSER FUQ-4653C Encoder Modulator 4x HDMI-YPbPr-CVBS Inputs Digital RF Output MPEG2-MPEG4 AVC H.264 Encoding DVB-C-DVB-T IP Output Hospitality Broadcasting Product Overview



The FMUSER FUQ-4653G is an all-in-one encoder modulator with 4x HDMI, YPbPr, and CVBS inputs, converting to digital RF output. It encodes video using MPEG2 and MPEG4 AVC H.264, and modulates signals for distribution. Features include an LCD display and web-based NMS for control. Ideal for public venues, supporting sources like satellite receivers.

Key feature

Integrated MPEG2/MPEG4 AVC H.264 encoding for HD/SD video.


Supports DD AC3, MPEG4-AAC, MPEG2-AAC, and MPEG1 Layer II audio formats.


Features 4x HDMI, YPbPr, and CVBS inputs.

Provides DVB-C, DVB-T, optional ISDB-T, ATSC, ASI, and IP outputs.

Includes web-based NMS for remote monitoring and updates.

Principle Chart

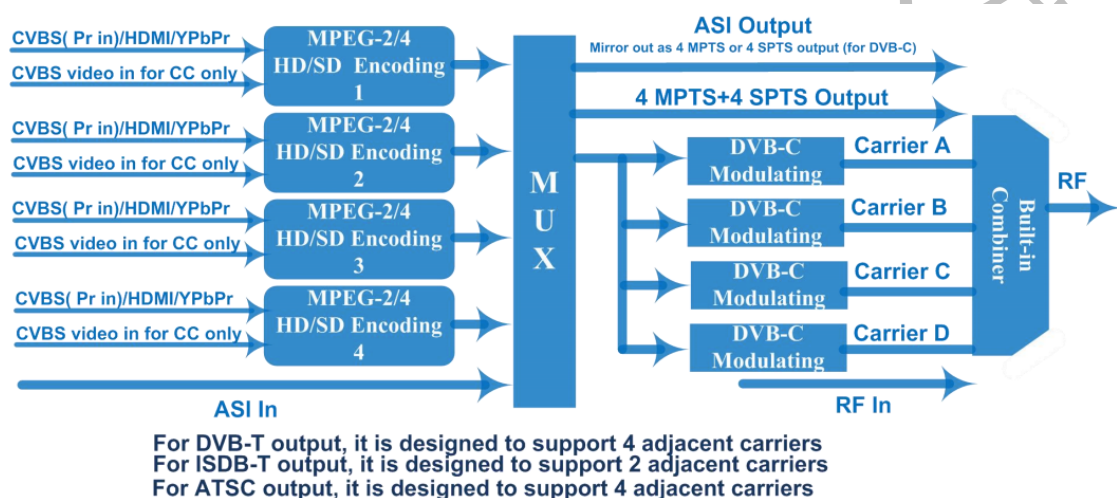

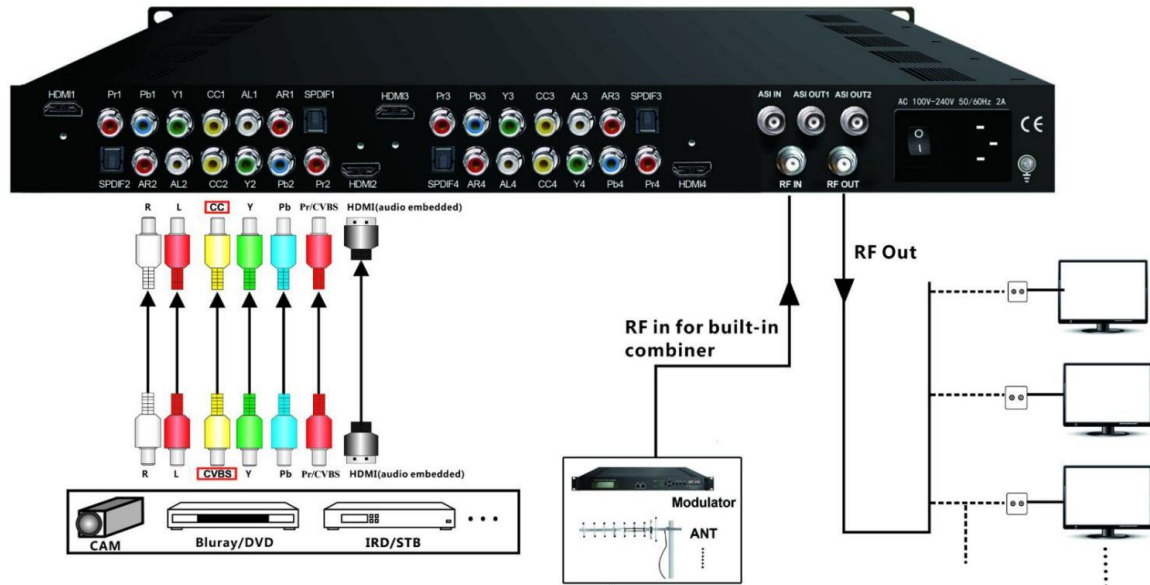

Specifications

Encoder Section	HDMI	Video	Interface	HDMI*4	HDMI*4	HDMI*4
Encoder Section	HDMI	Video	Encoding	MPEG2; MPEG4 AVC/H.264	MPEG2; MPEG4 AVC/H.264	MPEG2; MPEG4 AVC/H.264
Encoder Section	HDMI	Video	Bitrate	1-19.5Mbps	1-19.5Mbps	1-19.5Mbps
Encoder Section	HDMI	Video	Resolution	1920*1080_60P, 1920*1080_50P (-for MPEG4 AVC/H.264 only) 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P	1920*1080_60P, 1920*1080_50P (-for MPEG4 AVC/H.264 only) 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P	1920*1080_60P, 1920*1080_50P (-for MPEG4 AVC/H.264 only) 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P
Encoder Section	HDMI	Video	Low Delay	Normal, Mode 1, Mode 2, Manual	Normal, Mode 1, Mode 2, Manual	Normal, Mode 1, Mode 2, Manual

Encoder Section	HDMI	Video	Chroma	4:2:0	4:2:0	4:2:0
Encoder Section	HDMI	Video	Aspect Ratio	16:9,4:3	16:9,4:3	16:9,4:3
Encoder Section	HDMI	Audio	Interface	HDMI*4 /S PDIF*4/Audio(L/R)*4	HDMI*4 /S PDIF*4/Audio(L/R)*4	HDMI*4 /S PDIF*4/Audio(L/R)*4
Encoder Section	HDMI	Audio	Encoding	MPEG1 Layer II; MPEG 2-AAC; MPEG 4-AAC and Dolby Digital AC3 2.0 (optional)	MPEG1 Layer II; MPEG 2-AAC; MPEG 4-AAC and Dolby Digital AC3 2.0 (optional)	MPEG1 Layer II; MPEG 2-AAC; MPEG 4-AAC and Dolby Digital AC3 2.0 (optional)
Encoder Section	HDMI	Audio	Dialog Normalization	-31 ~ -1 dB (Applicable for DD AC3 only)	-31 ~ -1 dB (Applicable for DD AC3 only)	-31 ~ -1 dB (Applicable for DD AC3 only)
Encoder Section	HDMI	Audio	Sample rate	48KHz	48KHz	48KHz
Encoder Section	HDMI	Audio	Bitrate	64/96/128/192/256/320 kbps	64/96/128/192/256/320 kbps	64/96/128/192/256/320 kbps
Encoder Section	CVBS /YPbPr	Video	Encoding	MPEG2; MPEG4 AVC/H.264	MPEG2; MPEG4 AVC/H.264	MPEG2; MPEG4 AVC/H.264
Encoder Section	CVBS /YPbPr	Video	Interface	CVBS/YPbPr*4 (RCA)	CVBS/YPbPr*4 (RCA)	CVBS/YPbPr*4 (RCA)
Encoder Section	CVBS /YPbPr	Video	Bitrate	1-19.5Mbps	1-19.5Mbps	1-19.5Mbps

Encoder Section	CVBS /YPbPr	Video	Resolution	YPbPr: 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P CVBS: 720*480_60i, 720*576_50i	YPbPr: 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P CVBS: 720*480_60i, 720*576_50i	YPbPr: 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P CVBS: 720*480_60i, 720*576_50i
Encoder Section	CVBS /YPbPr	Video	Low Delay	Normal, Mode 1, Mode 2, Manual	Normal, Mode 1, Mode 2, Manual	Normal, Mode 1, Mode 2, Manual
Encoder Section	CVBS /YPbPr	Video	Chroma	4:2:0	4:2:0	4:2:0
Encoder Section	CVBS /YPbPr	Video	Aspect Ratio	16:9,4:3	16:9,4:3	16:9,4:3
Encoder Section	CVBS /YPbPr	Audio	Encoding	MPEG1 Layer II ,MPEG2-AAC , MPEG4-AC and Dolby Digital AC3 2.0 (optional)	MPEG1 Layer II ,MPEG2-AAC , MPEG4-AC and Dolby Digital AC3 2.0 (optional)	MPEG1 Layer II ,MPEG2-AAC , MPEG4-AC and Dolby Digital AC3 2.0 (optional)
Encoder Section	CVBS /YPbPr	Audio	Interface	HDMI*4 /S PDIF*4/Audio(L/R)*4	HDMI*4 /S PDIF*4/Audio(L/R)*4	HDMI*4 /S PDIF*4/Audio(L/R)*4
Encoder Section	CVBS /YPbPr	Audio	Dialog Normalization	-31 ~ -1 dB (Applicable for DD AC3 only)	-31 ~ -1 dB (Applicable for DD AC3 only)	-31 ~ -1 dB (Applicable for DD AC3 only)
Encoder Section	CVBS /YPbPr	Audio	Sample rate	48KHz	48KHz	48KHz
Encoder Section	CVBS /YPbPr	Audio	Bitrate	64/96/128/192/256/320 kbps	64/96/128/192/256/320 kbps	64/96/128/192/256/320 kbps
Encoder Section	Resolution Downscale	Resolution Downscale	In Resolution	Available Out Resolution	Available Out Resolution	Available Out Resolution

Encoder Section	Resolution Downscale	Resolution Downscale	1920*1080_60P	1920*1080_60P, 1920*1080_60i, 1440*1080_60i, 1280*720_60p, 720*480_60i	1920*1080_60P, 1920*1080_60i, 1440*1080_60i, 1280*720_60p, 720*480_60i	1920*1080_60P, 1920*1080_60i, 1440*1080_60i, 1280*720_60p, 720*480_60i
Encoder Section	Resolution Downscale	Resolution Downscale	1920*1080_50P	1920*1080_50P, 1920*1080_50i, 1440*1080_50i, 1280*720_50P, 720*576_50i	1920*1080_50P, 1920*1080_50i, 1440*1080_50i, 1280*720_50P, 720*576_50i	1920*1080_50P, 1920*1080_50i, 1440*1080_50i, 1280*720_50P, 720*576_50i
Encoder Section	Resolution Downscale	Resolution Downscale	1920*1080_60i	1920*1080_60i, 1440*1080_60i, 720*480_60i	1920*1080_60i, 1440*1080_60i, 720*480_60i	1920*1080_60i, 1440*1080_60i, 720*480_60i
Encoder Section	Resolution Downscale	Resolution Downscale	1920*1080_50i	1920*1080_50i, 1440*1080_50i, 720*576_50i	1920*1080_50i, 1440*1080_50i, 720*576_50i	1920*1080_50i, 1440*1080_50i, 720*576_50i
Encoder Section	Resolution Downscale	Resolution Downscale	1280*720_60p	1280*720_60p, 720*480_60i	1280*720_60p, 720*480_60i	1280*720_60p, 720*480_60i
Encoder Section	Resolution Downscale	Resolution Downscale	1280*720_50P	1280*720_50P, 720*576_50i	1280*720_50P, 720*576_50i	1280*720_50P, 720*576_50i
Encoder Section	Resolution Downscale	Resolution Downscale	720*480_60i	720*480_60i	720*480_60i	720*480_60i
Encoder Section	Resolution Downscale	Resolution Downscale	720*576_50i	720*576_50i	720*576_50i	720*576_50i
Modulator Section	DVB-T (Optional)	DVB-T (Optional)	Standard	DVB-T	DVB-T	DVB-T
Modulator Section	DVB-T (Optional)	DVB-T (Optional)	Bandwidth	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M
Modulator Section	DVB-T (Optional)	DVB-T (Optional)	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM

Modulator Section	DVB-T (Optional)	DVB-T (Optional)	Code rate	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Modulator Section	DVB-T (Optional)	DVB-T (Optional)	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4
Modulator Section	DVB-T (Optional)	DVB-T (Optional)	Transmission Mode	2K, 4K, 8K	2K, 4K, 8K	2K, 4K, 8K
Modulator Section	DVB-T (Optional)	DVB-T (Optional)	MER	About 40dB	About 40dB	About 40dB
Modulator Section	DVB-T (Optional)	DVB-T (Optional)	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step	50~960MHz, 1KHz step
Modulator Section	DVB-T (Optional)	DVB-T (Optional)	RF Out	4*DVB-T carriers	4*DVB-T carriers	4*DVB-T carriers
Modulator Section	DVB-T (Optional)	DVB-T (Optional)	RF output level	-20~-9dbm, 0.1db step	-20~-9dbm, 0.1db step	-20~-9dbm, 0.1db step
Modulator Section	DVB-C (Optional)	DVB-C (Optional)	Standard	J.83A (DVB-C), J.83B, J.83C	J.83A (DVB-C), J.83B, J.83C	J.83A (DVB-C), J.83B, J.83C
Modulator Section	DVB-C (Optional)	DVB-C (Optional)	MER	About 40dB	About 40dB	About 40dB
Modulator Section	DVB-C (Optional)	DVB-C (Optional)	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step	50~960MHz, 1KHz step
Modulator Section	DVB-C (Optional)	DVB-C (Optional)	RF output level	-20~-3dbm, 0.1db step	-20~-3dbm, 0.1db step	-20~-3dbm, 0.1db step
Modulator Section	DVB-C (Optional)	DVB-C (Optional)	Symbol rate	3.000~9.000 Msps adjustable	3.000~9.000 Msps adjustable	3.000~9.000 Msps adjustable
Modulator Section	DVB-C (Optional)	DVB-C (Optional)	RF Out	4*DVB-C carriers	4*DVB-C carriers	4*DVB-C carriers
Modulator Section	DVB-C (Optional)	DVB-C (Optional)		J.83A	J.83B	J.83C
Modulator Section	DVB-C (Optional)	DVB-C (Optional)	Constellation	16/32/64/256 QAM	64/256 QAM	64/256 QAM

Modulator Section	DVB-C (Optional)	DVB-C (Optional)	Bandwidth	8M	6M	6M
Modulator Section	ATSC (Optional) under developing	ATSC (Optional) under developing	Standard	ATSC A/53	ATSC A/53	ATSC A/53
Modulator Section	ATSC (Optional) under developing	ATSC (Optional) under developing	Constellation	8 VSB	8 VSB	8 VSB
Modulator Section	ATSC (Optional) under developing	ATSC (Optional) under developing	MER	About 40dB	About 40dB	About 40dB
Modulator Section	ATSC (Optional) under developing	ATSC (Optional) under developing	RF frequency	50~960MHz, 1KHz step.	50~960MHz, 1KHz step.	50~960MHz, 1KHz step.
Modulator Section	ATSC (Optional) under developing	ATSC (Optional) under developing	RF Out	4*ATSC carriers	4*ATSC carriers	4*ATSC carriers
Modulator Section	ATSC (Optional) under developing	ATSC (Optional) under developing	RF output level	-20~-9dbm, 0.1db step	-20~-9dbm, 0.1db step	-20~-9dbm, 0.1db step
Modulator Section	ATSC (Optional) under developing	ATSC (Optional) under developing	Constellation	8VSB	8VSB	8VSB
	ISDB-T (Optional) under developing	ISDB-T (Optional) under developing	Standard	ARIB STD-B31	ARIB STD-B31	ARIB STD-B31
	ISDB-T (Optional) under developing	ISDB-T (Optional) under developing	Bandwidth	6M	6M	6M
	ISDB-T (Optional) under developing	ISDB-T (Optional) under developing	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
	ISDB-T (Optional) under developing	ISDB-T (Optional) under developing	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4

	ISDB-T (Optional) under developing	ISDB-T (Optional) under developing	Transmission Mode	2K, 4K, 8K	2K, 4K, 8K	2K, 4K, 8K
	ISDB-T (Optional) under developing	ISDB-T (Optional) under developing	MER	About 40dB	About 40dB	About 40dB
	ISDB-T (Optional) under developing	ISDB-T (Optional) under developing	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step	50~960MHz, 1KHz step
	ISDB-T (Optional) under developing	ISDB-T (Optional) under developing	RF Out	2*ISDBT carriers	2*ISDBT carriers	2*ISDBT carriers
	ISDB-T (Optional) under developing	ISDB-T (Optional) under developing	RF output level	-20~-9dbm, 0.1db step	-20~-9dbm, 0.1db step	-20~-9dbm, 0.1db step
General	System	System	Local interface	LCD + control buttons	LCD + control buttons	LCD + control buttons
General	System	System	Remote management	Web NMS	Web NMS	Web NMS
General	System	System	Stream Out	2 ASI out (BNC type, the same one mirrors out as one of 4/2 MPTS outputs and 4 SPTS outputs)	2 ASI out (BNC type, the same one mirrors out as one of 4/2 MPTS outputs and 4 SPTS outputs)	2 ASI out (BNC type, the same one mirrors out as one of 4/2 MPTS outputs and 4 SPTS outputs)

General	System	System	Stream Out	DVB-C/DV B-T/ATSC: IP (4 MPTS & 4 SPTS) out over UDP, RTP/RTSP ISDBT: IP (2 MPTS & 4 SPTS) out over UDP, RTP/RTSP	DVB-C/DV B-T/ATSC: IP (4 MPTS & 4 SPTS) out over UDP, RTP/RTSP ISDBT: IP (2 MPTS & 4 SPTS) out over UDP, RTP/RTSP	DVB-C/DV B-T/ATSC: IP (4 MPTS & 4 SPTS) out over UDP, RTP/RTSP ISDBT: IP (2 MPTS & 4 SPTS) out over UDP, RTP/RTSP
General	System	System	DATA Port	1000M	1000M	1000M
General	System	System	NMS interface	RJ45, 100M	RJ45, 100M	RJ45, 100M
General	System	System	Language	English	English	English
General	Physical Sp ecification	Physical Sp ecification	Power supply	100~240V AC, 50/60Hz	100~240V AC, 50/60Hz	100~240V AC, 50/60Hz
General	Physical Sp ecification	Physical Sp ecification	Dimensions	482*400*44 mm	482*400*44 mm	482*400*44 mm
General	Physical Sp ecification	Physical Sp ecification	Operation t emperature	0~45■	0~45■	0~45■

Major Technical Comparison

	The Former Version	The Current Version■V2■
DD AC3 (2.0/5.1/7.1) passthrough	Yes	No
Bit rate Mode	CBR/VBR option	CBR
Low Delay	Normal/Mode 1/Mode 2	Normal/Mode 1/Mode 2/Manual
Character Encoding option	No	Yes
DATA Port	100M port	1000M port
Frequency Range	30-960MHz	50-960MHz
Symbol Rate--DVB-C	5-9Msps	3-9Msps
IP out--DVB-C	1 MPTS and 4 SPTS	4 MPTS and 4 SPTS
IP out--DVB-T	4 SPTS	4 MPTS and 4 SPTS

DVB-T carriers	2 carriers	4 carriers
----------------	------------	------------

The other differences are existing Web GUI design and chassis design etc(NMS/DATA port position), no further description here.

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227