

FMUSER FUQ-4653D Encoder Modulator 2x HDMI YPbPr CVBS Input DVB-C ATSC DVB-T ISDB-T Output MPEG2 MPEG4 AVC H.264 Encoding Web NMS Remote Management for Hotel IPTV and Public Venues



- ▶ **2*DVB-T/4*DVB-C/4* ATSC/ISDB-T Encoder & Modulator**
- ▶ **DVB-C/T/ATSC/ISDB RF in one device, Modulation dynamic switching**

Product Overview

The FMUSER FUQ-4653D is an encoder modulator with MPEG2 HD and MPEG4 HD encoding, featuring inputs: 2x HDMI, YPbPr, CVBS, and outputs: RF, 2x ASI, IP. It converts signals through encoding and modulation for digital broadcasting. Controlled via web-based NMS, it supports remote management and updates. Ideal for hotels, metros, and public venue applications.

Key feature

- Features integrated MPEG2 HD and MPEG4 HD encoding for high-definition processing.
- Supports modulation standards: DVB-C, ATSC, DVB-T, ISDBT with dynamic switching.
- Provides flexible I/O: 2x HDMI/YPbPr/CVBS inputs, 2x ASI outputs, IP streaming over UDP/RTP/RTSP.
- Includes web-based NMS for remote control and firmware updates.

Specifications

Encoding Section	Encoding Section
Video (HDMI)	Video (HDMI)
Encoding	MPEG2; MPEG4 AVC/H.264
Interface	HDMI*2

Resolution	1920*1080_60P, 1920*1080_50P (For MPEG 4 AVC/H.264 only), 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P
Low Delay	Normal, Mode 1, Mode 2, Manual
Audio (HDMI)	Audio (HDMI)
Encoding	MPEG1 Layer II; MPEG2-AAC; MPEG4-AAC; DD AC3(2.0) optional; DD AC3 (2.0/5.1/7.1) passthrough
Interface	HDMI*2/SPDIF*2/2*Stereo/4*mono
Sample rate	48KHz
Bit rate	64/96/128/ 192/256/320kbps
Video (CVBS/YPbPr)	Video (CVBS/YPbPr)
Encoding	MPEG2; MPEG4 AVC/H.264
Interface	CVBS/YPbPr*2(RCA)
Resolution	CVBS: 720*576_50i, 720*480_60i YPbPr:1920*1080_60i, 1920*1080_50i; 1280*720_60p, 1280*720_50P
Audio (L/R)	Audio (L/R)
Encoding	MPEG1 Layer II; MPEG2-AAC; MPEG4-AAC; DD AC3(2.0) optional;
Interface	2*Stereo/4*mono
Sample rate	48KHz
Bit rate	64/96/128/ 192/256/320kbps

DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section
Standard	Standard	Standard	J.83A (DVB-C), J.83B, J.83C	J.83A (DVB-C), J.83B, J.83C	J.83A (DVB-C), J.83B, J.83C
MER	MER	MER	≥40dB	≥40dB	≥40dB
RF frequency	RF frequency	RF frequency	30~960MHz, 1KHz step	30~960MHz, 1KHz step	30~960MHz, 1KHz step
RF output level	RF output level	RF output level	-30~ -10dbm (77~97 dbμV), 0.1db step	-30~ -10dbm (77~97 dbμV), 0.1db step	-30~ -10dbm (77~97 dbμV), 0.1db step

Symbol rate	Symbol rate	Symbol rate	5.000~9.000 Mpsps adjustable	5.000~9.000 Mpsps adjustable	5.000~9.000 Mpsps adjustable
RF Out	4*DVB-C adjacent carriers combined output	4*DVB-C adjacent carriers combined output	4*DVB-C adjacent carriers combined output	4*DVB-C adjacent carriers combined output	4*DVB-C adjacent carriers combined output
		J.83A	J.83A	J.83B	J.83C
Constellation	Constellation	16/32/64/128/ 256 QAM	16/32/64/128/ 256 QAM	64/ 256 QAM	64/ 256 QAM
Bandwidth	Bandwidth	8M	8M	6M	6M



DVB-T Modulator Section	DVB-T Modulator Section
Standard	EN300744
FFT mode	2K, 8K
Bandwidth	6M, 7M, 8M
Constellation	QPSK, 16QAM, 64QAM
Guard Interval	1/4, 1/8, 1/16, 1/32
FEC	1/2, 2/3, 3/4, 5/6, 7/8
MER	≥40dB
RF frequency	30~960MHz, 1KHz step
RF out	COFDM DVB-T out (2 carriers combined out)
RF output level	-30~ -10dbm (77~97 dbμV), 0.1db step

ATSC Modulator Section	ATSC Modulator Section	ATSC Modulator Section	ATSC Modulator Section	ATSC Modulator Section
Standard	Standard	ATSC A/53	ATSC A/53	ATSC A/53
Constellation	Constellation	8 VSB	8 VSB	8 VSB
RF output level	RF output level	-30~ -10dbm (77~97 dbμV), 0.1db step	-30~ -10dbm (77~97 dbμV), 0.1db step	-30~ -10dbm (77~97 dbμV), 0.1db step
MER	MER	≥40dB	≥40dB	≥40dB
RF frequency	RF frequency	36~960MHz, 1KHz step	36~960MHz, 1KHz step	36~960MHz, 1KHz step

RF Out	RF Out	4*ATSC adjacent carriers combined output	4*ATSC adjacent carriers combined output	4*ATSC adjacent carriers combined output
ISDBT Modulator Section	ISDBT Modulator Section	ISDBT Modulator Section	ISDBT Modulator Section	ISDBT Modulator Section
Standard	Standard	ARIB STD-B31	ARIB STD-B31	ARIB STD-B31
Bandwidth	Bandwidth	6M	6M	6M
Constellation	Constellation	DQPSK, QPSK, 16QAM, 64QAM	DQPSK, QPSK, 16QAM, 64QAM	DQPSK, QPSK, 16QAM, 64QAM
Guard Interval	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4
Transmission Mode	Transmission Mode	2K, 4K, 8K	2K, 4K, 8K	2K, 4K, 8K
MER	MER	≥40dB	≥40dB	≥40dB
RF frequency	RF frequency	30~960MHz, 1KHz step	30~960MHz, 1KHz step	30~960MHz, 1KHz step
RF output level	RF output level	-30~ -10dbm (77~97 dbμV), 0.1db step	-30~ -10dbm (77~97 dbμV), 0.1db step	-30~ -10dbm (77~97 dbμV), 0.1db step
RF Out	ISDBT adjacent carriers combined output	ISDBT adjacent carriers combined output	ISDBT adjacent carriers combined output	ISDBT adjacent carriers combined output
System	System	System	System	System
Local interface	Local interface	Local interface	LCD + control buttons	LCD + control buttons
Remote management	Remote management	Remote management	Web NMS	Web NMS
Stream Out	Stream Out	Stream Out	2 separate ASI out (BNC type); IP (2* SPTS&1*MPTS) over UDP/RTP/RTSP out (RJ45, 100M) RTSP is only for DVB-C modulation	2 separate ASI out (BNC type); IP (2* SPTS&1*MPTS) over UDP/RTP/RTSP out (RJ45, 100M) RTSP is only for DVB-C modulation
NMS interface	NMS interface	NMS interface	RJ45, 1000M	RJ45, 1000M
Language	Language	Language	English	English

General	General	General	General	General
Power supply	Power supply	Power supply	Power supply	AC 100V~240V
Dimensions	Dimensions	Dimensions	Dimensions	333*232*44mm
Weight	Weight	Weight	Weight	2.5 kg
Operation temperature	Operation temperature	Operation temperature	Operation temperature	0~45■

Principle Chart

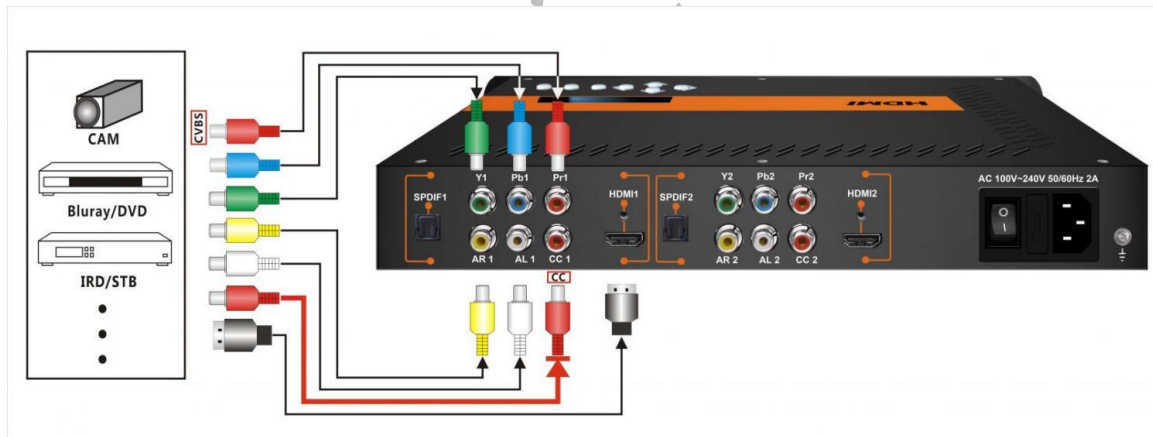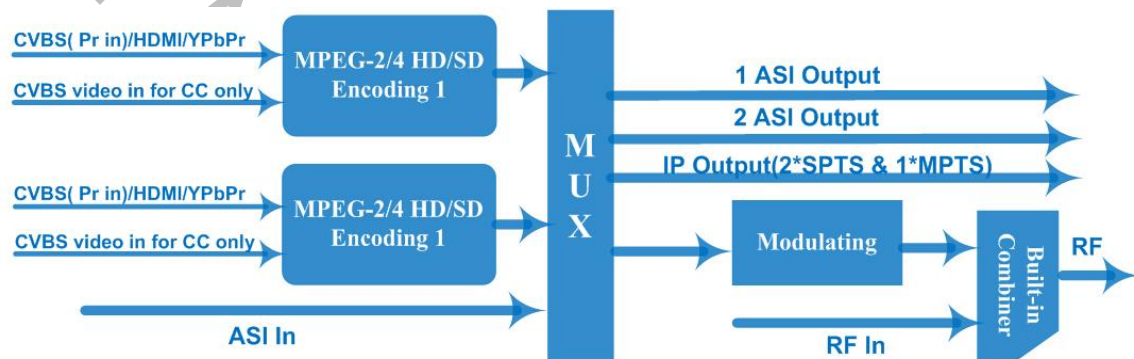

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)