

FMUSER FUQ-4653L-KA-8 8ch Encoder Multiplexing CVBS Input to IP-ASI Output MPEG-2 MPEG1 Layer II AC3 PAL-NTSC Digital Distribution Headend




Product Overview

The FUQ-4653B/FUQ-4653AB Encoder processes 8/12/24 CVBS inputs to deliver IP and ASI outputs with encoding and multiplexing. It converts signals by encoding video in MPEG-2 and audio in MPEG1 Layer II/AC3, supporting PAL/NTSC formats. Control is via web-based management for configuration and updates. Ideal for digital head-end systems in broadcasting and cable TV applications.

Key feature

For FUQ-4653AB: Adds QR Code, Caption, and Logo insertion capabilities

Principle Chart

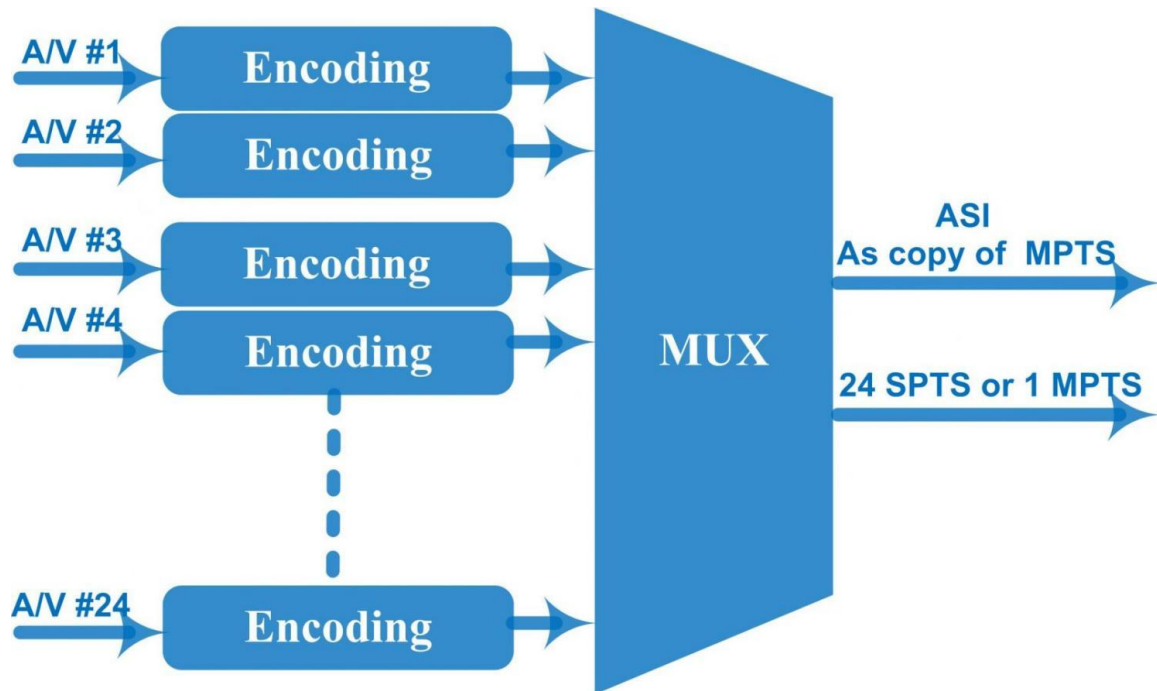

Technical specification

Input	8/12/24CVBS inputs , RCA interface	8/12/24CVBS inputs , RCA interface	8/12/24CVBS inputs , RCA interface
Video	Resolution	720×480_60i, 544×480_60i, 352×480_60i 352×240_60i, 320×240_60i,176×240_60i, 176×120_60i	720×480_60i, 544×480_60i, 352×480_60i 352×240_60i, 320×240_60i,176×240_60i, 176×120_60i
Video	Resolution	720×576_50i, 704×576_50i, 640×576_50i, 352×288_50i, 320×288_50i, 176×288_50i, 176×144_50i	720×576_50i, 704×576_50i, 640×576_50i, 352×288_50i, 320×288_50i, 176×288_50i, 176×144_50i
Video	Encoding	MPEG-2	MPEG-2
Video	Bit-rate	0.5Mbps~8Mbps each channel	0.5Mbps~8Mbps each channel
Video	Rate Control	CBR/VBR	CBR/VBR
Video	GOP Structure	GOP_0_B, GOP_1_B, GOP_2_B, GOP_3_B	GOP_0_B, GOP_1_B, GOP_2_B, GOP_3_B
Video	Advanced Pretreatment	De-interlacing, noise reduction	De-interlacing, noise reduction

Audio	Encoding	MPEG-1 Layer 2, AC3(2.0)	MPEG-1 Layer 2, AC3(2.0)
Audio	Sampling rate	48KHz	48KHz
Audio	Resolution	24-bit	24-bit
Audio	Bit-rate	64Kbps,128Kbps,192k bps,256kbps,320kbps, 384kbps each channel	64Kbps,128Kbps,192k bps,256kbps,320kbps, 384kbps each channel
Multiplexing	Function	PID remapping (automatically or manually)	PID remapping (automatically or manually)
Multiplexing	Function	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Generate PSI/ SI table automatically	Generate PSI/ SI table automatically
Stream output	1 ASI as copy of MPTS IP (MPTS/SPTS) output over UDP/RTP/RTSP 8/12 CVBS inputs with 8/12 SPTS and 1 MPTS output 24×CVBS inputs with 24 SPTS or 1 MPTS output	1 ASI as copy of MPTS IP (MPTS/SPTS) output over UDP/RTP/RTSP 8/12 CVBS inputs with 8/12 SPTS and 1 MPTS output 24×CVBS inputs with 24 SPTS or 1 MPTS output	1 ASI as copy of MPTS IP (MPTS/SPTS) output over UDP/RTP/RTSP 8/12 CVBS inputs with 8/12 SPTS and 1 MPTS output 24×CVBS inputs with 24 SPTS or 1 MPTS output
System function	Network management (WEB)	Network management (WEB)	Network management (WEB)
System function	Chinese and English language	Chinese and English language	Chinese and English language
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension(W×L×H)	Dimension(W×L×H)	482mm×410mm×44mm
Miscellaneous	Approx weight	Approx weight	8kg
Miscellaneous	Environment	Environment	0~45℃(work) -20~80℃ Storage
Miscellaneous	Power requirements	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz
Miscellaneous	Power consumption	Power consumption	20W

Order Information

	FU-4653K/KA-8	FU-4653K/KA-12	FU-4653K/KA-24
8CVBS Input	√		
12CVBS Input		√	
24CVBS Input			√

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)