

## **FUQ-4655AB Encoder 12 HD-SDI & 32 IP Inputs MPEG-2 H.264 Encoding 1 MPTS 12 SPTS UDP-RTP Streaming for CATV Satellite Terrestrial TV**

### *Product Overview*



The FUQ-4655AB encoder processes signals with 12 HD-SDI inputs and 32 IP inputs, outputting 1 MPTS and 12 SPTS over UDP/RTP/RTSP. It encodes video in MPEG-2 or MPEG-4 AVC/H.264 and handles Dolby Digital AC3 audio. Managed via a web interface, this unit is optimized for CATV, satellite, and terrestrial digital TV systems.

#### *Key feature*

Supports 12 HD-SDI inputs for MPEG-2 or MPEG-4 AVC/H.264 encoding with EIA608/EIA708 closed captioning.


Handles audio encoding including MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, and Dolby Digital AC3 (2.0) with passthrough.

Provides 32 IP inputs over UDP/RTP and outputs 1 MPTS/12 SPTS via DATA1/DATA2 ports.

Enables PID remapping, PCR adjusting, and PSI/SI table editing/inserting.

Features web-based management for configuration and updates.

#### *Principle Chart*

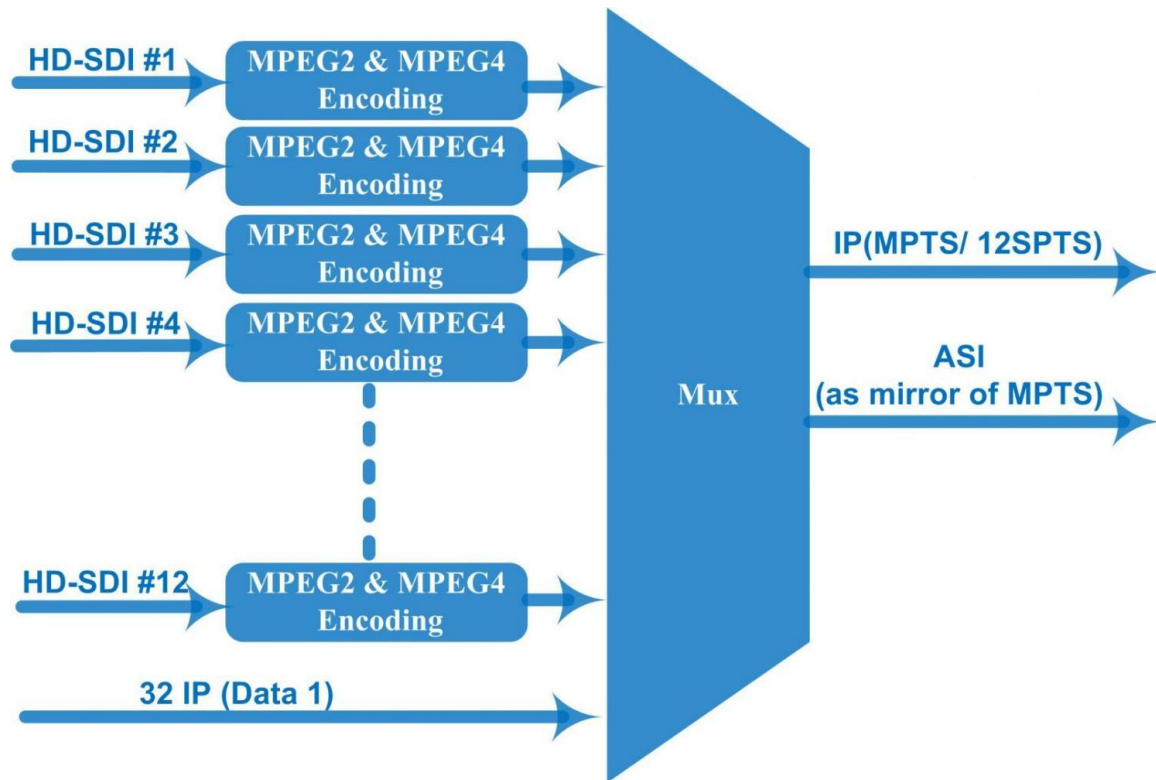

Technical Specification

|       |                                                                                              |                                                                                              |                                                                                              |                                                                                                                                       |
|-------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Input | 12 HD-SDI inputs with CC (EIA608/EIA708)<br>32 IP input over UDP and RTP through DATA 1 port | 12 HD-SDI inputs with CC (EIA608/EIA708)<br>32 IP input over UDP and RTP through DATA 1 port | 12 HD-SDI inputs with CC (EIA608/EIA708)<br>32 IP input over UDP and RTP through DATA 1 port | 12 HD-SDI inputs with CC (EIA608/EIA708)<br>32 IP input over UDP and RTP through DATA 1 port                                          |
| Video | Resolution                                                                                   | Input                                                                                        | Input                                                                                        | 1920*1080_60p,<br>1920*1080_50p,<br>1920*1080_60i,<br>1920*1080_50i,<br>1280*720_60p,<br>1280*720_50P,<br>720*480_60i,<br>720*576_50i |

|       |               |                                                               |                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------|---------------|---------------------------------------------------------------|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video | Resolution    | Output                                                        | Output                                                        | 1920*1080_60p,<br>1920*1080_50p,<br>1920*1080_60i,<br>1920*1080_50i,<br>1440*1080_60i,<br>1440*1080_50i,<br>1280*720_60p,<br>1280*720_50P,<br>720*576_50p,<br>720*576_50i,<br>720*576_30p,<br>720*576_25p,<br>720*480_60p, 720*480_60i, 720*480_30p, 720*480_25p, 320*240_60p, 320*240_50p, 320*240_30p, 320*240_25p, 320*180_60p, 320*180_50p, 320*180_30p, 320*180_25p, 960*540_50i, 704*576_50i, 704*480_60i, 640*576_50i, 640*480_60i, 544*576_50i, 544*480_60i, |
| Video | Encoding      | MPEG2 & MPEG4 AVC/H.264                                       | MPEG2 & MPEG4 AVC/H.264                                       | MPEG2 & MPEG4 AVC/H.264                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Video | Bit-rate      | 0.8~19Mbps for H.264 encoding<br>1~19Mbps for MPEG-2 encoding | 0.8~19Mbps for H.264 encoding<br>1~19Mbps for MPEG-2 encoding | 0.8~19Mbps for H.264 encoding<br>1~19Mbps for MPEG-2 encoding                                                                                                                                                                                                                                                                                                                                                                                                        |
| Video | Rate Control  | CBR/VBR                                                       | CBR/VBR                                                       | CBR/VBR                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Video | GOP Structure | GOP B Frame: 0-3, GOP P Frame: 0-6                            | GOP B Frame: 0-3, GOP P Frame: 0-6                            | GOP B Frame: 0-3, GOP P Frame: 0-6                                                                                                                                                                                                                                                                                                                                                                                                                                   |

|                 |                                                                                                                                                  |                                                                                                                                                  |                                                                                                                                                  |                                                                                                                                                  |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio           | Encoding                                                                                                                                         | MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, Dolby Digital AC3 (2.0) encoding, AC3 (2.0/5.1) passthrough                                                | MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, Dolby Digital AC3 (2.0) encoding, AC3 (2.0/5.1) passthrough                                                | MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, Dolby Digital AC3 (2.0) encoding, AC3 (2.0/5.1) passthrough                                                |
| Audio           | Sampling rate                                                                                                                                    | 48KHz                                                                                                                                            | 48KHz                                                                                                                                            | 48KHz                                                                                                                                            |
| Audio           | Bit-rate                                                                                                                                         | 64Kbps-320kbps each channel                                                                                                                      | 64Kbps-320kbps each channel                                                                                                                      | 64Kbps-320kbps each channel                                                                                                                      |
| Multiplexing    | Maximum PID Remapping                                                                                                                            | 180 input per channel                                                                                                                            | 180 input per channel                                                                                                                            | 180 input per channel                                                                                                                            |
| Multiplexing    | Function                                                                                                                                         | PID remapping ( automatically or manually)                                                                                                       | PID remapping ( automatically or manually)                                                                                                       | PID remapping ( automatically or manually)                                                                                                       |
| Multiplexing    | Function                                                                                                                                         | Accurate PCR adjusting                                                                                                                           | Accurate PCR adjusting                                                                                                                           | Accurate PCR adjusting                                                                                                                           |
| Multiplexing    | Function                                                                                                                                         | Generate PSI/ SI table automatically                                                                                                             | Generate PSI/ SI table automatically                                                                                                             | Generate PSI/ SI table automatically                                                                                                             |
| Stream output   | 1 MPTS and 12 SPTS IP output over UDP and RTP/RTSP, 2*1000M Base-T Ethernet interface, Data 1 and Data 2 1 ASI output as mirror of MPTS-Optional | 1 MPTS and 12 SPTS IP output over UDP and RTP/RTSP, 2*1000M Base-T Ethernet interface, Data 1 and Data 2 1 ASI output as mirror of MPTS-Optional | 1 MPTS and 12 SPTS IP output over UDP and RTP/RTSP, 2*1000M Base-T Ethernet interface, Data 1 and Data 2 1 ASI output as mirror of MPTS-Optional | 1 MPTS and 12 SPTS IP output over UDP and RTP/RTSP, 2*1000M Base-T Ethernet interface, Data 1 and Data 2 1 ASI output as mirror of MPTS-Optional |
| System function | Network management (WEB)                                                                                                                         | Network management (WEB)                                                                                                                         | Network management (WEB)                                                                                                                         | Network management (WEB)                                                                                                                         |
| System function | Ethernet software upgrade                                                                                                                        | Ethernet software upgrade                                                                                                                        | Ethernet software upgrade                                                                                                                        | Ethernet software upgrade                                                                                                                        |
| Miscellaneous   | Dimension (W×L×H)                                                                                                                                | Dimension (W×L×H)                                                                                                                                | 482mm×440mm ×44mm                                                                                                                                | 482mm×440mm ×44mm                                                                                                                                |
| Miscellaneous   | Environment                                                                                                                                      | Environment                                                                                                                                      | 0~45℃(work)■-20~80℃■Storage ■                                                                                                                    | 0~45℃(work)■-20~80℃■Storage ■                                                                                                                    |

|               |                    |                    |                                              |                                              |
|---------------|--------------------|--------------------|----------------------------------------------|----------------------------------------------|
| Miscellaneous | Power requirements | Power requirements | AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz | AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz |
|---------------|--------------------|--------------------|----------------------------------------------|----------------------------------------------|

### About Us

**FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.**

**Contact:Tomleequan Email■[sales@fmuser.com](mailto:sales@fmuser.com) whatsapp: +8613922702227**