

FMUSER FUQ-4655L Multi-Channel Encoder 12 HDMI & 32 IP Inputs MPEG-2 MPEG-4 AVC-H.264 Encoding PID Remapping for CATV Satellite Terrestrial TV Product Overview



The FMUSER FUQ-4655R is a multi-channel encoder with 12 HDMI inputs, 12 CC inputs, and 32 IP inputs via UDP/RTP. It encodes video using MPEG-2 and MPEG-4 AVC/H.264 standards, and supports audio formats including MPEG1 Layer II and Dolby Digital AC3. Ideal for CATV, satellite, and terrestrial TV broadcasting systems.

Key feature


Supports 12 HDMI inputs with MPEG-2 and MPEG-4 AVC/H.264 encoding for HD video up to 1080p-60.

Includes 12 dedicated CC input ports for closed captioning support.

Offers flexible audio encoding with MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, and optional Dolby Digital AC3.

Enables IP streaming with 32 inputs/outputs via UDP/RTP, supporting 1 MPTS and 12 SPTS streams.

Principle Chart

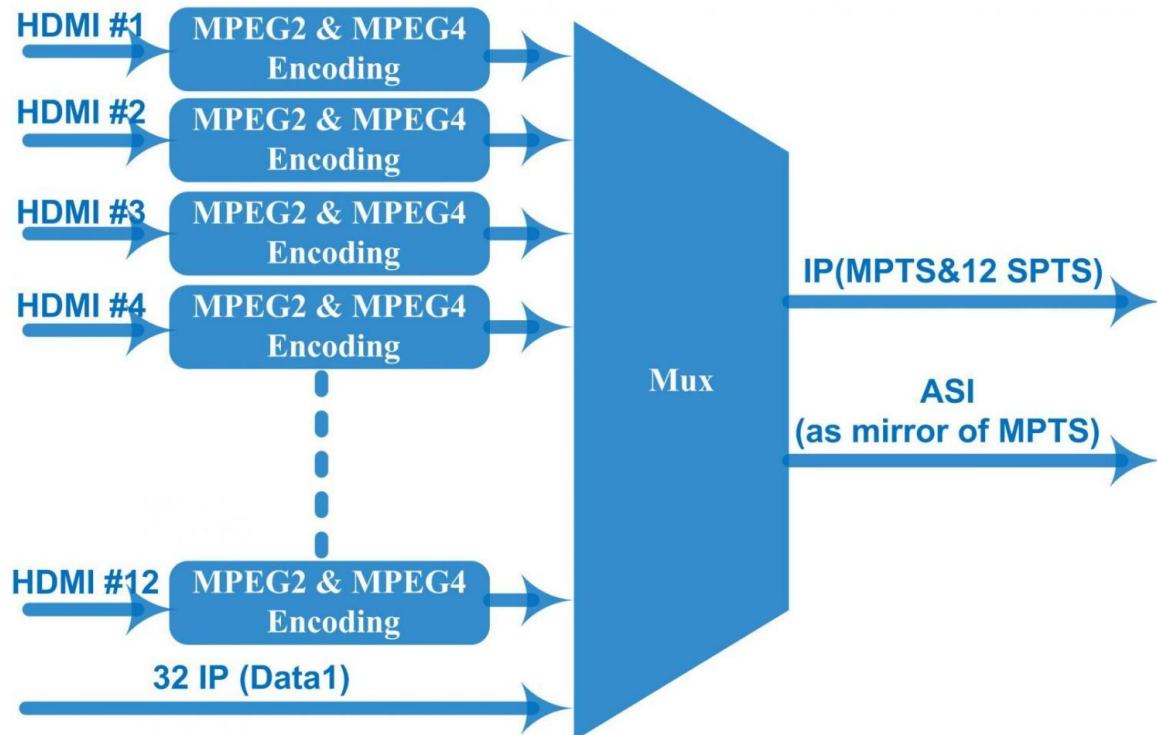

Technical specification

Input	12 HDMI inputs 12 CC (closed caption) input, BNC interface 32 IP input over UDP and RTP through DATA 1 port	12 HDMI inputs 12 CC (closed caption) input, BNC interface 32 IP input over UDP and RTP through DATA 1 port	12 HDMI inputs 12 CC (closed caption) input, BNC interface 32 IP input over UDP and RTP through DATA 1 port	12 HDMI inputs 12 CC (closed caption) input, BNC interface 32 IP input over UDP and RTP through DATA 1 port
Video	Resolution	Input	Input	1920*1080_60p, 1920*1080_50p, 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P, 720*480_60i, 720*576_50i

Video	Resolution	Output	Output	1920*1080_60p, 1920*1080_50p, 1920*1080_60i, 1920*1080_50i,1 440*1080_60i, 1440*1080_50i, 1280*720_60p,1 280*720_50P, 720*576_50p, 720*576_50i, 720*576_30p, 720*576_25p, 720*480_60p, 72 0*480_60i,720*4 80_30p, 720*480 _25p,320*240_6 0p,320*240_50p, 320*240_30p, 32 0*240_25p,320*1 80_60p, 320*180_50p, 320*180_30p, 320*180_25p, 960*540_50i, 70 4*576_50i,704*4 80_60i, 640*576_50i 640*480_60i, 54 4*576_50i,544*4 80_60i,
Video	Encoding	MPEG2 & MPEG4 AVC/H.264	MPEG2 & MPEG4 AVC/H.264	MPEG2 & MPEG4 AVC/H.264
Video	Bit-rate	0.8~19Mbps for H.264 encoding 1~19Mbps for MPEG-2 encoding	0.8~19Mbps for H.264 encoding 1~19Mbps for MPEG-2 encoding	0.8~19Mbps for H.264 encoding 1~19Mbps for MPEG-2 encoding
Video	Rate Control	CBR/VBR	CBR/VBR	CBR/VBR
Video	GOP Structure	GOP B Frame: 0-3, GOP P Frame: 0-6	GOP B Frame: 0-3, GOP P Frame: 0-6	GOP B Frame: 0-3, GOP P Frame: 0-6
Video	Advanced Pretreatment	De-interlacing, noise reduction	De-interlacing, noise reduction	De-interlacing, noise reduction

Audio	Encoding	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, Dolby Digital AC3 (2.0) encoding (Optional), AC3 (2.0/5.1) passthrough	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, Dolby Digital AC3 (2.0) encoding (Optional), AC3 (2.0/5.1) passthrough	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, Dolby Digital AC3 (2.0) encoding (Optional), AC3 (2.0/5.1) passthrough
Audio	Sampling rate	48KHz	48KHz	48KHz
Audio	Resolution	24-bit	24-bit	24-bit
Audio	Bit-rate	64Kbps-320kbps each channel	64Kbps-320kbps each channel	64Kbps-320kbps each channel
Multiplexing	Maximum PID Remapping	180 input per channel	180 input per channel	180 input per channel
Multiplexing	Function	PID remapping (automatically or manually)	PID remapping (automatically or manually)	PID remapping (automatically or manually)
Multiplexing	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Generate PSI/ SI table automatically	Generate PSI/ SI table automatically	Generate PSI/ SI table automatically
Stream output	1 MPTS and 12 SPTS IP output over UDP and RTP/RTSP, 2*1000M Base-T Ethernet interface, Data 1 and Data 2 1 ASI output as mirror of MPTS-Optional	1 MPTS and 12 SPTS IP output over UDP and RTP/RTSP, 2*1000M Base-T Ethernet interface, Data 1 and Data 2 1 ASI output as mirror of MPTS-Optional	1 MPTS and 12 SPTS IP output over UDP and RTP/RTSP, 2*1000M Base-T Ethernet interface, Data 1 and Data 2 1 ASI output as mirror of MPTS-Optional	1 MPTS and 12 SPTS IP output over UDP and RTP/RTSP, 2*1000M Base-T Ethernet interface, Data 1 and Data 2 1 ASI output as mirror of MPTS-Optional
System function	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System function	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension (W×L×H)	Dimension (W×L×H)	482mm×440mm ×44mm	482mm×440mm ×44mm

Miscellaneous	Environment	Environment	0~45℃(work)■-2 0~80℃■Storage ■	0~45℃(work)■-2 0~80℃■Storage ■
Miscellaneous	Power requirements	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz

Technical Comparison

	FU-4655K	FU-4655KF	FU-4653L
Chipset	Vixs	Fujitsu	Hisilicon
Video Channel	2/4/6/8/10/12×HDMI optional	4/8/12/16/20/24×HDM I optional	4/8/12/16/20/24×HDM I optional
Video Encode	MPEG2 & MPEG4 AVC/H.264	MPEG-4 AVC/H.264	MPEG-4 AVC/H.264
CC Input	12 CC input ports	N/A	N/A
IP Input	32 ×IP	32× IP	N/A
Video Bit Rate	0.8~19Mbps for H.264 encoding 1~19Mbps for MPEG-2 encoding	0.8~19Mbps each channel	1Mbps~13Mbps each channel (Bit rate is with a high fluctuation, suitable for cable system, not suitable for satellite uplink)
GOP	GOP B Frame: 0-3, GOP P Frame: 0-6	IBBP	GOP Size=25 (without B Frame)
Resolution	Up to 1080p-60 (Resolution and frame rate downscale conversion)	Up to 1080p-60 (1080i/720p to 576p/480p downscale conversion)	Up to 1080P-30 (1080i/p-60/50 to 1080p-30/25 auto downscale conversion)
Audio Encode	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, Dolby Digital AC3 (2.0) encoding (Optional), AC3 pass through	MPEG1 Layer II, (MPEG-2 AAC, MPEG-4 AAC Optional) AC3 pass through	MPEG-1 Layer II
Audio Gain	Yes	Yes	Yes
OSD Function	N/A	N/A	Yes
ASI output	Option as required	Option as required	Option as required

IP output	SPTS and 1MPTS	SPTS and 1MPTS	SPTS and 1MPTS(for 4/8/12 channel) SPTS or 1MPTS(for 16/20/24 channel)
-----------	----------------	----------------	---

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227