

**FMUSER FUQ-46610F IP Gateway 16 Tuner Inputs 2 ASI Inputs DVB-S-S2-S2X
DVB-C-T ATSC ISDB-T to 512 SPTS 16 MPTS IP Outputs BISS Descrambling Web
Management Broadcast Headend**




Product overview

The FUQ-46610F is a professional IP gateway converting 16 tuner inputs (supporting DVB-S/S2/S2X, DVB-C/T, ATSC, or ISDB-T) or 2 ASI feeds into IP streams. It processes signals into 512 SPTS (PID-filtered) or 16 MPTS (Null PKT filtered) outputs via dual Gigabit Ethernet ports with BISS descrambling. The 1RU rack-mount unit features web-based control and DiSEqC switching. Ideal for broadcast headend digitization, IPTV distribution, and multi-standard signal aggregation in terrestrial/satellite systems.

Key feature

Web-based management for remote signal monitoring and control

Working Principle

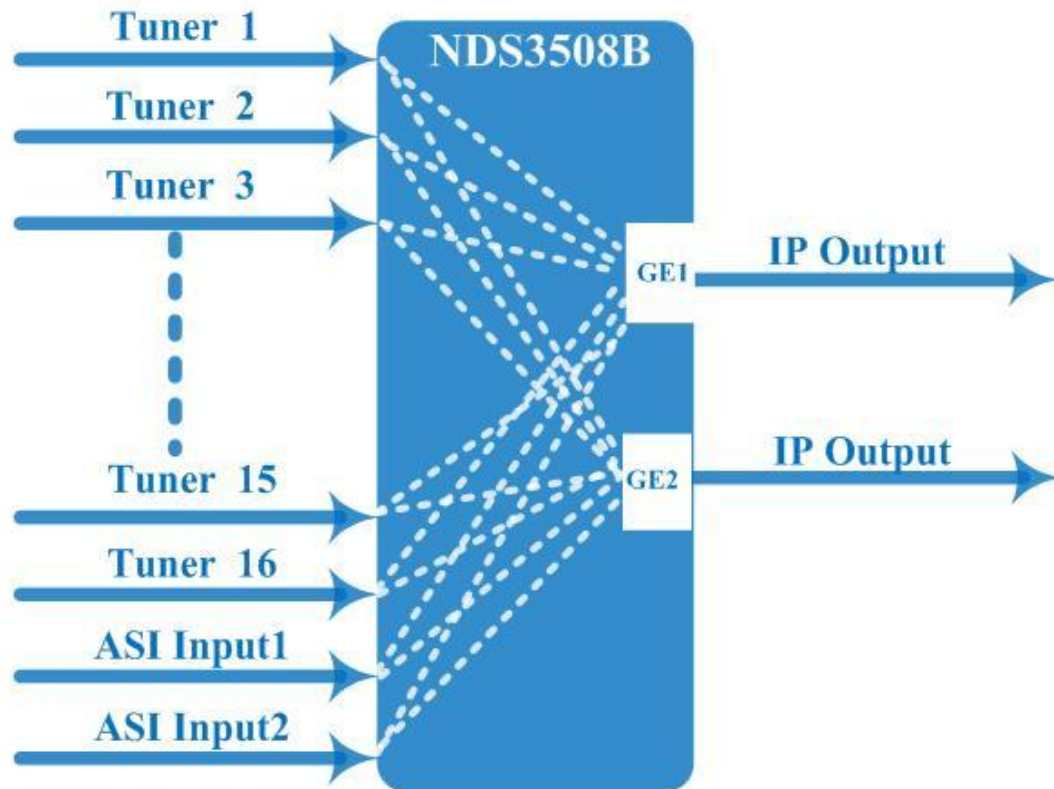

Specifications

Input	Input	Optional 1:16 tuners input +2 ASI input---SPTS output Optional 2:14 tuners input +2 ASI input --- MPTS output Optional 3:16 tuners input --- MPTS output	Optional 1:16 tuners input +2 ASI input---SPTS output Optional 2:14 tuners input +2 ASI input --- MPTS output Optional 3:16 tuners input --- MPTS output	Optional 1:16 tuners input +2 ASI input---SPTS output Optional 2:14 tuners input +2 ASI input --- MPTS output Optional 3:16 tuners input --- MPTS output	Optional 1:16 tuners input +2 ASI input---SPTS output Optional 2:14 tuners input +2 ASI input --- MPTS output Optional 3:16 tuners input --- MPTS output
Tuner Section	Multi-mode tuners switchable (New Type)	DVB-C	Frequency In	Frequency In	60~890MHz
Tuner Section	Multi-mode tuners switchable (New Type)	DVB-C	Standard	Standard	J.83A(DVB-C , J.83B, J.83C

Tuner Section	Multi-mode tuners switchable (New Type)	DVB-C	Constellation	Constellation	16/32/64/128/256 QAM
Tuner Section	Multi-mode tuners switchable (New Type)	DVB-T/(T)	Frequency In	Frequency In	60~890MHz
Tuner Section	Multi-mode tuners switchable (New Type)	DVB-T/(T)	Bandwidth	Bandwidth	6/7/8 M bandwidth
Tuner Section	Multi-mode tuners switchable (New Type)	ISDB-T	Frequency In	Frequency In	60~890MHz
Tuner Section	Version 1	DVB-S	Frequency In	Frequency In	950-2150MHz
Tuner Section	Version 1	DVB-S	Symbol rate	Symbol rate	1~45 Msps
Tuner Section	Version 1	DVB-S	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Tuner Section	Version 1	DVB-S	Constellation	Constellation	QPSK
Tuner Section	Version 1	DVB-S2	Frequency In	Frequency In	950-2150MHz
Tuner Section	Version 1	DVB-S2	Symbol rate	Symbol rate	1~45 Msps
Tuner Section	Version 1	DVB-S2	FEC	FEC	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	Version 1	DVB-S2	Constellation	Constellation	QPSK, 8PSK
Tuner Section	Version 2 (New Type)	DVB-S	Frequency In	Frequency In	950~2150MHz
Tuner Section	Version 2 (New Type)	DVB-S	Symbol rate	Symbol rate	0.5~45Msps
Tuner Section	Version 2 (New Type)	DVB-S	Signal Strength	Signal Strength	- 65- -25dBm
Tuner Section	Version 2 (New Type)	DVB-S	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Tuner Section	Version 2 (New Type)	DVB-S	Constellation	Constellation	QPSK

Tuner Section	Version 2 (New Type)	DVB-S	Max input bitrate	Max input bitrate	≤125 Mbps
Tuner Section	Version 2 (New Type)	DVB-S2	Frequency In	Frequency In	950~2150MHz
Tuner Section	Version 2 (New Type)	DVB-S2	Symbol rate	Symbol rate	QPSK/8PSK /16APSK :0.5~45 Msps 32APSK: 0.5~34Msps;
Tuner Section	Version 2 (New Type)	DVB-S2	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	Version 2 (New Type)	DVB-S2	Constellation	Constellation	QPSK, 8PSK, 16APSK, 32APSK
Tuner Section	Version 2 (New Type)	DVB-S2	Max input bitrate	Max input bitrate	≤125 Mbps
Tuner Section	Version 2 (New Type)	DVB-S2X	Frequency In	Frequency In	950~2150MHz
Tuner Section	Version 2 (New Type)	DVB-S2X	Symbol rate	Symbol rate	QPSK/8PSK /16APSK :0.5~45 Msps 8APSK: 0.5~40Msps 32APSK: 0.5~34Msps

Tuner Section	Version 2 (New Type)	DVB-S2X	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36 , 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10, 2/3-L, 32/45, 11/15, 7/9
Tuner Section	Version 2 (New Type)	DVB-S2X	Constellation	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Tuner Section	Version 2 (New Type)	DVB-S2X	Max input bitrate	Max input bitrate	≤125 Mbps
Tuner Section		ATSC	Frequency In	Frequency In	54~858MHz
Tuner Section		ATSC	Bandwidth	Bandwidth	6M bandwidth
Tuner Section		ATSC	Constellation	Constellation	8VSB
BISS Descrambling	BISS Descrambling	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)

Output	Output	512 SPTS IP mirrored output over UDP and RTP/RTSP protocol through GE1 and GE2 port (IP address and port number of GE1 and GE2 are different) , Unicast and Multicast	512 SPTS IP mirrored output over UDP and RTP/RTSP protocol through GE1 and GE2 port (IP address and port number of GE1 and GE2 are different) , Unicast and Multicast	512 SPTS IP mirrored output over UDP and RTP/RTSP protocol through GE1 and GE2 port (IP address and port number of GE1 and GE2 are different) , Unicast and Multicast	512 SPTS IP mirrored output over UDP and RTP/RTSP protocol through GE1 and GE2 port (IP address and port number of GE1 and GE2 are different) , Unicast and Multicast
Output	Output	16 MPTS IP output (for Tuner/ASI passthrough) over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	16 MPTS IP output (for Tuner/ASI passthrough) over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	16 MPTS IP output (for Tuner/ASI passthrough) over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	16 MPTS IP output (for Tuner/ASI passthrough) over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast
System	System	Web based management	Web based management	Web based management	Web based management
System	System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Miscellaneous	Dimension	Dimension	482mm×410mm×44mm (W×L×H)	482mm×410mm×44mm (W×L×H)
Miscellaneous	Miscellaneous	Approx weight	Approx weight	3.6kg	3.6kg
Miscellaneous	Miscellaneous	Environment	Environment	0~45℃(work) -20~80℃S storage	0~45℃(work) -20~80℃S storage
Miscellaneous	Miscellaneous	Power requirements	Power requirements	100~240VAC, 50/60Hz	100~240VAC, 50/60Hz
Miscellaneous	Miscellaneous	Power consumption	Power consumption	20W	20W

Tuner Input Options:

8 DVB-C Tuners + 8 ATSC Tuners
8 DVB-C Tuners + 8 DVB-T/(T) Tuners
8 DVB-S2/S2X Tuners + 8 DVB-T/(T) Tuners
8 DVB-S2/S2X Tuners + 8 ISDB-T Tuners
16 DVB-S/S2/S2X/DVB-C/T/(T) /ISDB-T/ATSC Tuners

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227