


**FMUSER FUQ-46610K TV Processor 6-Channel Analog-Digital Input
DVB-C-T-ATSC-ISDB-T Output Web-Managed RF Headend System** Application Sample

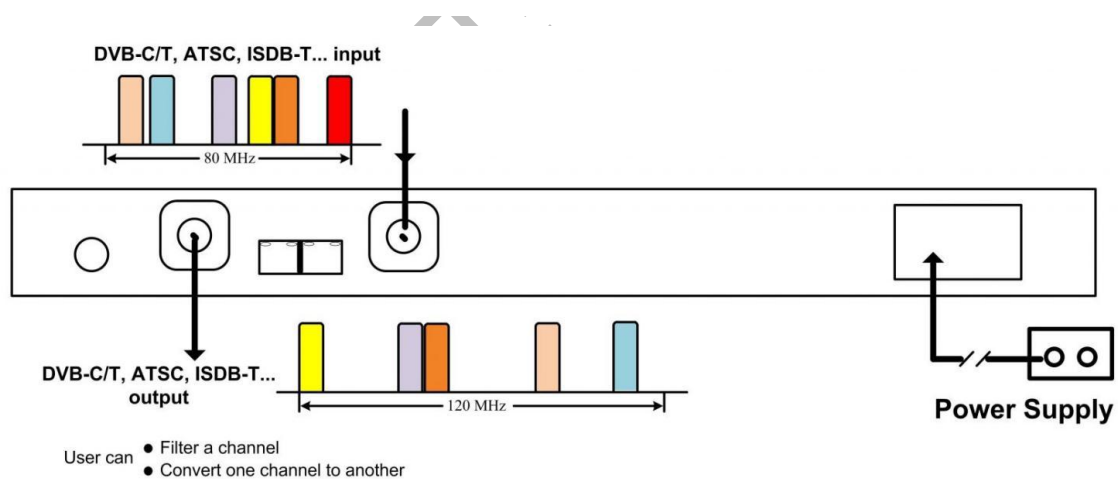

Product overview

The FMUSER FUQ-46610K processes 6 channels of analog/digital signals via 470-860MHz RF input and delivers 48-960MHz RF output. It converts between DVB-C/T, ATSC, and ISDB-T standards with configurable 6M/8M bandwidth. This 1RU rack-mount unit features WEB-based management for remote control and firmware updates. Ideal for cable headend modernization and multi-standard broadcast systems requiring flexible signal conversion.

Key feature

Web interface for remote management and system upgrades

Technical Specifications

Input	1*RF IN with up to 6 frequencies	1*RF IN with up to 6 frequencies	1*RF IN with up to 6 frequencies
-------	----------------------------------	----------------------------------	----------------------------------

Input	RF range: 470-860MHz, 80M bandwidth for start-end channel	RF range: 470-860MHz, 80M bandwidth for start-end channel	RF range: 470-860MHz, 80M bandwidth for start-end channel
Output	1*RF OUT with up to 6 frequencies - N Type, 50Ω 1* RF TEST - F Type	1*RF OUT with up to 6 frequencies - N Type, 50Ω 1* RF TEST - F Type	1*RF OUT with up to 6 frequencies - N Type, 50Ω 1* RF TEST - F Type
Output	RF range	48~960MHz, 1KHz step, 110M bandwidth for start-end channel	48~960MHz, 1KHz step, 110M bandwidth for start-end channel
Output	RF ATT	-25~-2 dBm, 0.5dBm step	-25~-2 dBm, 0.5dBm step
Output	Shoulder level	≥57dB (for single channel), ≥54dB (for 6 channels)	≥57dB (for single channel), ≥54dB (for 6 channels)
Output	Image rejection	>70dB	>70dB
Output	Spurious in band	<-55dBc	<-55dBc
Standard	6M/8M channel bandwidth, DVB-C/T, ATSC, ISDB-T, PAL, NTSC, etc	6M/8M channel bandwidth, DVB-C/T, ATSC, ISDB-T, PAL, NTSC, etc	6M/8M channel bandwidth, DVB-C/T, ATSC, ISDB-T, PAL, NTSC, etc
System	WEB-server manage	WEB-server manage	WEB-server manage
System	WEB system upgrade	WEB system upgrade	WEB system upgrade
General	Dimensions (W*L*H)	Dimensions (W*L*H)	482mm×410mm×44mm
General	Weight	Weight	4 kg
General	Temperature	Temperature	0~45℃(Running), -20~80℃(Storage)
General	Power Supply	Power Supply	AC 220V±10%,50/60Hz
General	Consumption	Consumption	27W

Performance Reference

>>>>>Digital COFDM Channel (6 Frequencies)<<<<<<



Figure 1 COFDM Spectrum



Figure 2 Shoulder Level



Figure 3 Out-band Rejection

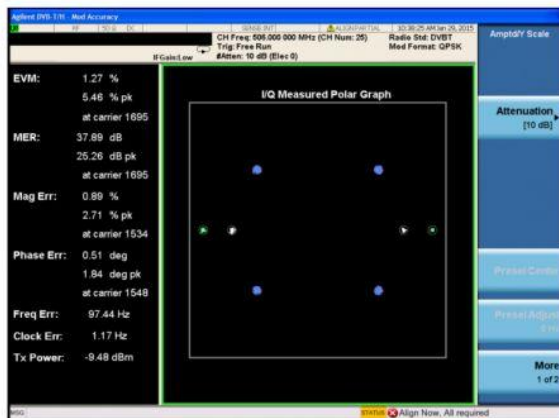


Figure 4 MER (QPSK)



Figure 5 MER (16 QAM)

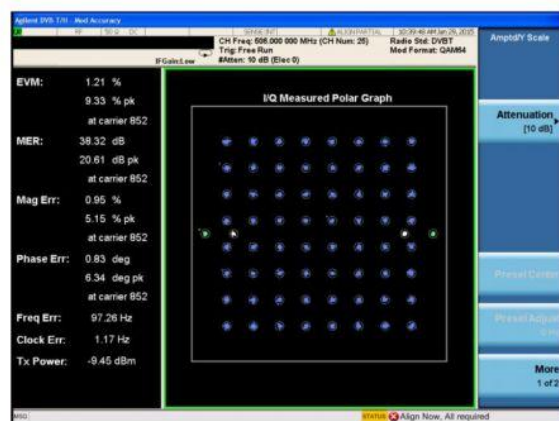


Figure 6 MER (64 QAM)

>>>>>Analog Channel (6 Frequencies)<<<<<<

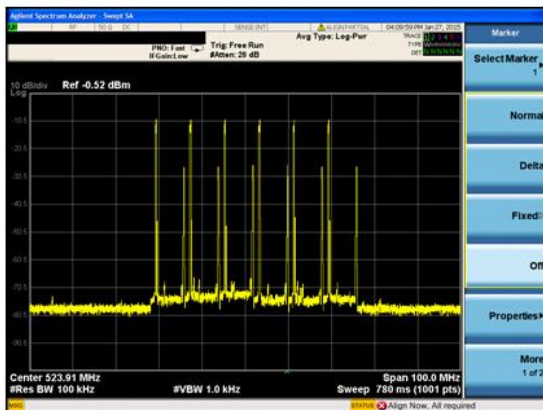


Figure 7 Analog Spectrum (D/K)

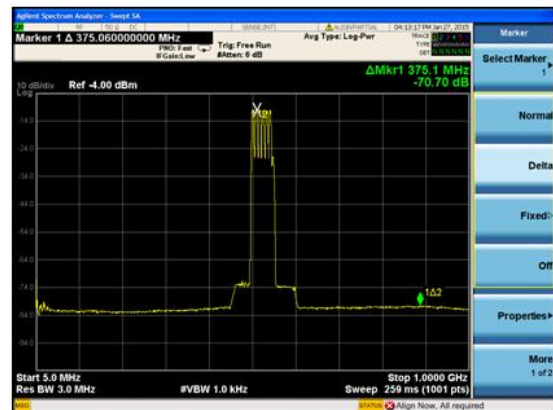


Figure 8 Out-band Rejection

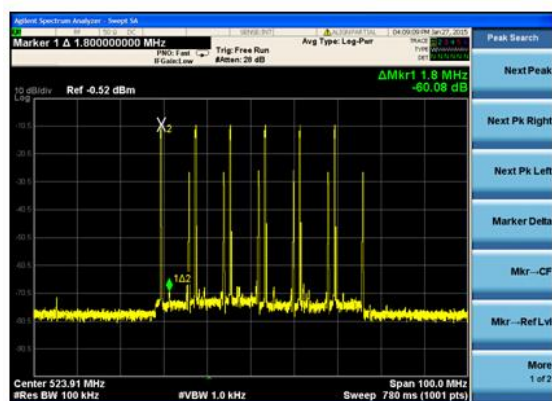


Figure 9 In-band Spurious

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)