


FMUSER FUQ-467B Series SD IRD Dual RF-ASI-IP Inputs 2 ASI-IP-CVBS Outputs DVB-C DVB-T-T ISDB-T DVB-S-S2-S2X Demodulation Descrambling Decoding Broadcast Reception

Its production is stopped temporarily, and the date for resuming production is not fixed yet.



Demodulation Module = 2*RF/Loop out + 2*CAM + 2*Smartcard

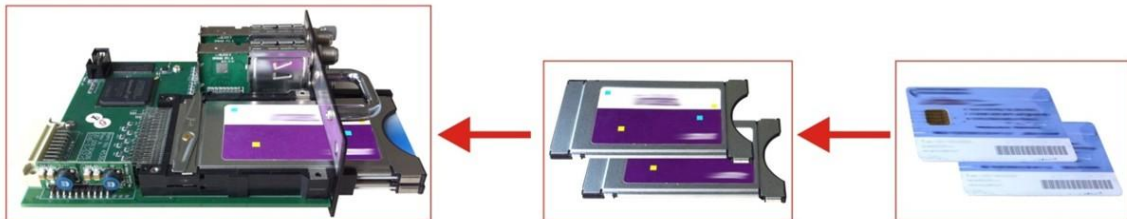

Product overview

The FMUSER FUQ-467Y Series SD IRD integrates demodulation, descrambling, and decoding in a 1U chassis, with dual tuner inputs for RF, ASI, and IP sources. It processes signals by converting RF inputs to CVBS output, supporting standards like DVB-S/S2/S2X. The pluggable module design enables component customization. Ideal for broadcast distribution and television signal transmission.

Key feature

Integrated demodulation, descrambling, and decoding in one unit.


Supports dual tuner inputs with DVB-S/S2/S2X, DVB-C, DVB-T/(T), and ISDB-T.

Features BISS and CAM/CI descrambling for encrypted content.

Pluggable modules for easy replacement of demodulator and decoder components.

Delivers CVBS, ASI, and IP (UDP/RTP/RTSP) outputs.

Principle Chart

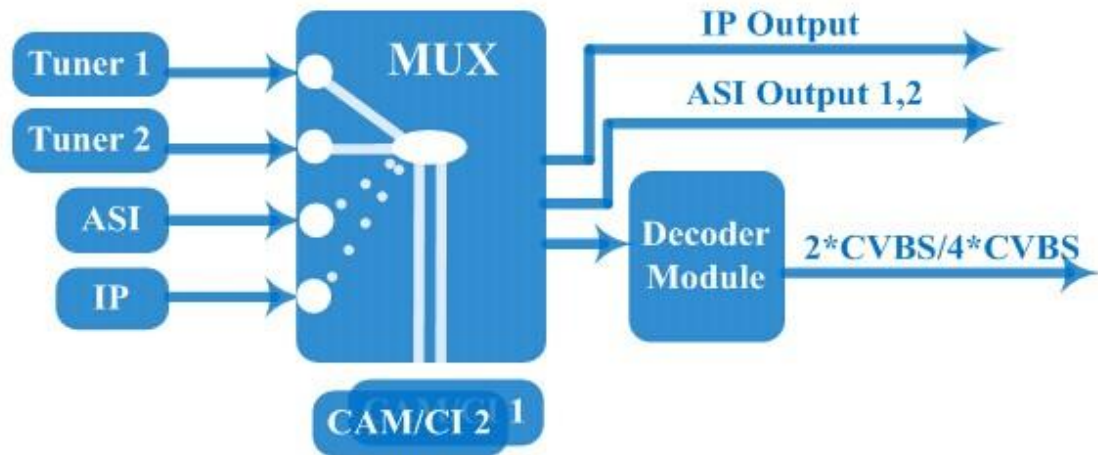

Technical Specifications

Input	2 *Tuner(DVB-C, T/(T), ISDBT, S/S2/S2 X optional), F type 1*ASI input for re-mux, BNC interface 1*IP input for re-mux (UDP)	2 *Tuner(DVB-C, T/(T), ISDBT, S/S2/S2 X optional), F type 1*ASI input for re-mux, BNC interface 1*IP input for re-mux (UDP)	2 *Tuner(DVB-C, T/(T), ISDBT, S/S2/S2 X optional), F type 1*ASI input for re-mux, BNC interface 1*IP input for re-mux (UDP)	2 *Tuner(DVB-C, T/(T), ISDBT, S/S2/S2 X optional), F type 1*ASI input for re-mux, BNC interface 1*IP input for re-mux (UDP)	2 *Tuner(DVB-C, T/(T), ISDBT, S/S2/S2 X optional), F type 1*ASI input for re-mux, BNC interface 1*IP input for re-mux (UDP)	2 *Tuner(DVB-C, T/(T), ISDBT, S/S2/S2 X optional), F type 1*ASI input for re-mux, BNC interface 1*IP input for re-mux (UDP)	2 *Tuner(DVB-C, T/(T), ISDBT, S/S2/S2 X optional), F type 1*ASI input for re-mux, BNC interface 1*IP input for re-mux (UDP)	
Tuner Section	Multi-mode tuners switchable (New)	Multi-mode tuners switchable (New)	DVB-C	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz	
Tuner Section	Multi-mode tuners switchable (New)	Multi-mode tuners switchable (New)	DVB-C	Standard	Standard	J.83A, J.83C	J.83B	

Tuner Section	Multi-mode tuners switchable (New)	Multi-mode tuners switchable (New)	DVB-C	Constellation	Constellation	16/32/64/128/256 QAM	64/256 QAM	
Tuner Section	Multi-mode tuners switchable (New)	Multi-mode tuners switchable (New)	DVB-T/(T)	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz	
Tuner Section	Multi-mode tuners switchable (New)	Multi-mode tuners switchable (New)	DVB-T/(T)	Bandwidth	Bandwidth	6/7/8 M	6/7/8 M	
Tuner Section	Multi-mode tuners switchable (New)	Multi-mode tuners switchable (New)	ISDB-T	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz	
Tuner Section	Version 1	Version 1	DVB-S	Input Frequency	Input Frequency	950~2150MHz	950~2150MHz	
Tuner Section	Version 1	Version 1	DVB-S	Symbol rate	Symbol rate	1~45 Msps	1~45 Msps	
Tuner Section	Version 1	Version 1	DVB-S	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	
Tuner Section	Version 1	Version 1	DVB-S	Constellation	Constellation	QPSK	QPSK	
Tuner Section	Version 1	Version 1	DVB-S	Signal Strength	Signal Strength	- 65~-25 dBm	- 65~-25 dBm	
Tuner Section	Version 1	Version 1	DVB-S	Max input bitrate	Max input bitrate	≤120 Mbps	≤120 Mbps	
Tuner Section	Version 1	Version 1	DVB-S2	Input Frequency	Input Frequency	950~2150MHz	950~2150MHz	
Tuner Section	Version 1	Version 1	DVB-S2	Symbol rate	Symbol rate	1~45 Msps	1~45 Msps	

Tuner Section	Version 1	Version 1	DVB-S2	FEC	FEC	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10	
Tuner Section	Version 1	Version 1	DVB-S2	Constellation	Constellation	QPSK, 8PSK	QPSK, 8PSK	
Tuner Section	Version 1	Version 1	DVB-S2	Max input bitrate	Max input bitrate	≤120 Mbps	≤120 Mbps	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S	Input Frequency	Input Frequency	950~2150MHz	950~2150MHz	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S	Symbol rate	Symbol rate	0.5~45 Msps	0.5~45 Msps	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S	Signal Strength	Signal Strength	- 65~-25dBm	- 65~-25dBm	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S	Constellation	Constellation	QPSK	QPSK	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S	Max input bitrate	Max input bitrate	≤160 Mbps	≤160 Mbps	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S2	Input Frequency	Input Frequency	950~2150MHz	950~2150MHz	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S2	Symbol rate	Symbol rate	QPSK/8PSK /16APSK :0.5~45 Msps 32APSK: 0.5~40Msps;	QPSK/8PSK /16APSK :0.5~45 Msps 32APSK: 0.5~40Msps;	

Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S2	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16 APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32A PSK: 3/4, 4/5, 5/6, 8/9, 9/10	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16 APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32A PSK: 3/4, 4/5, 5/6, 8/9, 9/10	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S2	Constellation	Constellation	QPSK, 8PSK, 16APSK, 32APSK	QPSK, 8PSK, 16APSK, 32APSK	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S2	Max input bitrate	Max input bitrate	≤160 Mbps	≤160 Mbps	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S2 X	Input Frequency	Input Frequency	950~2150MHz	950~2150MHz	

Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S2 X	Symbol rate	Symbol rate	QPSK/8 PSK /16 APSK :0.5~45 Mps 8APSK: 0.5~40 Mps 32 APSK: 0 .5~40M sps	QPSK/8 PSK /16 APSK :0.5~45 Mps 8APSK: 0.5~40 Mps 32 APSK: 0 .5~40M sps	
------------------	--------------------	--------------------	-------------	----------------	----------------	---	---	--

Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S2 X	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK : 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36 , 2/3-L, 25/36, 13/18, 7/9, 77/90 3 2APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK : 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36 , 2/3-L, 25/36, 13/18, 7/9, 77/90 3 2APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9	
---------------	-----------------	-----------------	----------	-----	-----	--	--	--


Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S2 X	Constellation	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK	QPSK, 8PSK, 8APSK, 16APSK, 32APSK	
Tuner Section	Version 2 (New)	Version 2 (New)	DVB-S2 X	Max input bitrate	Max input bitrate	≤160 Mbps	≤160 Mbps	
Descrambling	Descrambling	CAM/CI Quantity	CAM/CI Quantity	2	2	2	2	
Descrambling	Descrambling	BISS Mode	BISS Mode	Mode 1, Mode E (up to 1 20Mbps)	Mode 1, Mode E (up to 1 20Mbps)	Mode 1, Mode E (up to 1 20Mbps)	Mode 1, Mode E (up to 1 20Mbps)	
Output	Output	IP (1*MPTS & 8*SPTS) out over UDP, RTP/RTSP. 100Base-T Ethernet interface (unicast / multicast)	IP (1*MPTS & 8*SPTS) out over UDP, RTP/RTSP. 100Base-T Ethernet interface (unicast / multicast)	IP (1*MPTS & 8*SPTS) out over UDP, RTP/RTSP. 100Base-T Ethernet interface (unicast / multicast)	IP (1*MPTS & 8*SPTS) out over UDP, RTP/RTSP. 100Base-T Ethernet interface (unicast / multicast)	IP (1*MPTS & 8*SPTS) out over UDP, RTP/RTSP. 100Base-T Ethernet interface (unicast / multicast)	IP (1*MPTS & 8*SPTS) out over UDP, RTP/RTSP. 100Base-T Ethernet interface (unicast / multicast)	
Output	Output	2×ASI mirrored out, BNC interface	2×ASI mirrored out, BNC interface	2×ASI mirrored out, BNC interface	2×ASI mirrored out, BNC interface	2×ASI mirrored out, BNC interface	2×ASI mirrored out, BNC interface	
Output	Output	2*CVBS optional	2*CVBS optional	2*CVBS optional	2*CVBS optional	2*CVBS optional	2*CVBS optional	

Output	Output	Decode Out	Decode Out	Video In interface: 2xCVBS (RCA) Audio In interface: 2xStereo/4xMono (RCA) Resolution: PAL 576i, NTSC 480i Video Decode: MPEG-2, MPEG-4 AVC/H.264 (optional) Audio Decode: MPEG 1 Layer II	Video In interface: 2xCVBS (RCA) Audio In interface: 2xStereo/4xMono (RCA) Resolution: PAL 576i, NTSC 480i Video Decode: MPEG-2, MPEG-4 AVC/H.264 (optional) Audio Decode: MPEG 1 Layer II	Video In interface: 2xCVBS (RCA) Audio In interface: 2xStereo/4xMono (RCA) Resolution: PAL 576i, NTSC 480i Video Decode: MPEG-2, MPEG-4 AVC/H.264 (optional) Audio Decode: MPEG 1 Layer II	Video In interface: 2xCVBS (RCA) Audio In interface: 2xStereo/4xMono (RCA) Resolution: PAL 576i, NTSC 480i Video Decode: MPEG-2, MPEG-4 AVC/H.264 (optional) Audio Decode: MPEG 1 Layer II	
Output	Output	4*CVBS optional	4*CVBS optional	4*CVBS optional	4*CVBS optional	4*CVBS optional	4*CVBS optional	

Output	Output	Decode Out	Decode Out	Decode Out	Video In interface: 4xCVBS (RCA) Audio In interface: 4xStereo/8xMono (RCA) Resolution: PAL 576i, NTSC 480i Video Decode: MPEG-2, MPEG-4 AVC/H.264 Audio Decode: MPEG 1 Layer II	Video In interface: 4xCVBS (RCA) Audio In interface: 4xStereo/8xMono (RCA) Resolution: PAL 576i, NTSC 480i Video Decode: MPEG-2, MPEG-4 AVC/H.264 Audio Decode: MPEG 1 Layer II	Video In interface: 4xCVBS (RCA) Audio In interface: 4xStereo/8xMono (RCA) Resolution: PAL 576i, NTSC 480i Video Decode: MPEG-2, MPEG-4 AVC/H.264 Audio Decode: MPEG 1 Layer II	
System	System	Local interface	Local interface	Local interface	LCD + control buttons	LCD + control buttons	LCD + control buttons	LCD + control buttons
System	System	Remote management	Remote management	Remote management	Web-server Management	Web-server Management	Web-server Management	Web-server Management
System	System	Language	Language	Language	English	English	English	English
System	System	Upgrade	Upgrade	Upgrade	USB, web management	USB, web management	USB, web management	USB, web management
Miscellaneous	Miscellaneous	Dimension	Dimension	Dimension	482*300*44.5mm (W×L×H)	482*300*44.5mm (W×L×H)	482*300*44.5mm (W×L×H)	
Miscellaneous	Miscellaneous	Approx weight	Approx weight	Approx weight	3.5kg	3.5kg	3.5kg	

Miscellaneous	Miscellaneous	Environment	Environment	Environment	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■	
Miscellaneous	Miscellaneous	Power requirements	Power requirements	Power requirements	100~240VAC, 50/60Hz	100~240VAC, 50/60Hz	100~240VAC, 50/60Hz	
Miscellaneous	Miscellaneous	Power consumption	Power consumption	Power consumption	20W	20W	20W	

System Connection Sample

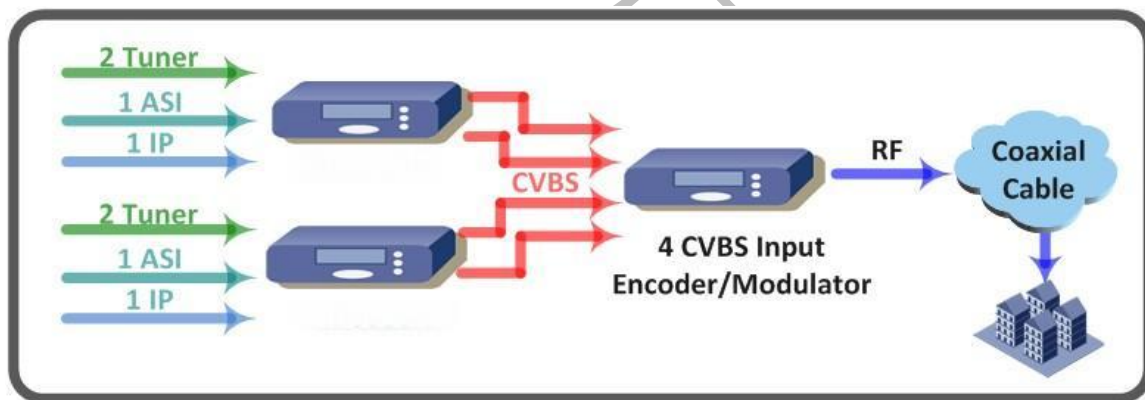

Ordering Guide

FU-467X, 'X' should be interpreted as different digits which indicate tuners of different standard. *
FU-4671 DVB-C SD IRD * FU-4674 DVB-(T) SD IRD * FU-4675 DVB-S/S2 SD IRD Multiple decoding boards are optional: Option 1: 2 A/V output (MPEG-2 Decoding)- FU-467X Option 2: 2 A/V output (MPEG-2 & MPEG-4 Decoding) – FU-467X-A Option 3: 4 A/V output (MPEG-2 & MPEG-4 Decoding) – FU-467X-C

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227

FMUSER 广州艾盛