

## **FMUSER FUQ-4823C Multiplexer Scrambler 4 Tuner Inputs 5 MPTS Outputs DVB-S-DVB-S2-DVB-S2X UDP-RTP PID Remapping Web-Based NMS Satellite Broadcast IPTV**




### **Product overview**

The FMUSER FUQ-4823C Multiplexer Scrambler processes DVB-S/S2/S2X signals through 4 tuner inputs and outputs 5 MPTS streams (4 bypassed + 1 multiplexed) via UDP/RTP. It remaps PIDs and multiplexes signals for efficient broadcast transmission. Features include web-based NMS and DiSEqC support for satellite control. Ideal for broadcast, satellite communication, and media distribution applications.

### **Key Features**

- Supports multi-standard tuner inputs for DVB-S/S2/S2X signals across 950-2150MHz with  $\leq 170$  Mbps throughput.
- Delivers flexible MPTS output with 4 bypassed and 1 multiplexed streams via UDP/RTP multicast/unicast.
- Enables granular PID control with remapping of up to 256 PIDs per channel.
- Features integrated management via web-based NMS and DiSEqC support.
- Provides high-capacity processing for QPSK/8PSK/16APSK/32APSK constellations and FEC rates.

### **Inner Principle Chart (Per Card)**

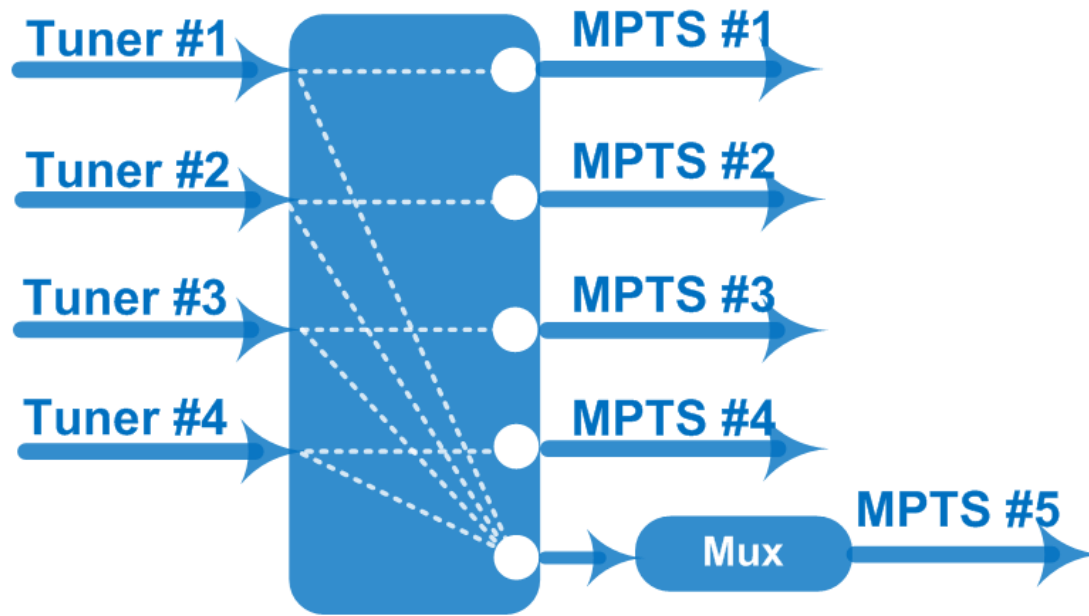

### Specifications

|                |                                                                                                                                                             |                                                                                                                                                             |                                                                                                                                                             |                                                                                                                                                             |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input / Output | 4 Tuner input, F Type 5 MPTS (4 MPTS out thru bypassing, 1 MPTS multiplexing) out over UDP/RTP thru Data port, 100/1000M self-adaptation, unicast/multicast | 4 Tuner input, F Type 5 MPTS (4 MPTS out thru bypassing, 1 MPTS multiplexing) out over UDP/RTP thru Data port, 100/1000M self-adaptation, unicast/multicast | 4 Tuner input, F Type 5 MPTS (4 MPTS out thru bypassing, 1 MPTS multiplexing) out over UDP/RTP thru Data port, 100/1000M self-adaptation, unicast/multicast | 4 Tuner input, F Type 5 MPTS (4 MPTS out thru bypassing, 1 MPTS multiplexing) out over UDP/RTP thru Data port, 100/1000M self-adaptation, unicast/multicast |
| Mux            | Max number of managing PID: 256 (for 1 MPTS out thru multiplexing)                                                                                          | Max number of managing PID: 256 (for 1 MPTS out thru multiplexing)                                                                                          | Max number of managing PID: 256 (for 1 MPTS out thru multiplexing)                                                                                          | Max number of managing PID: 256 (for 1 MPTS out thru multiplexing)                                                                                          |
| Mux            | Functions                                                                                                                                                   | PID remapping (automatically/ manually)                                                                                                                     | PID remapping (automatically/ manually)                                                                                                                     | PID remapping (automatically/ manually)                                                                                                                     |
| Mux            | Functions                                                                                                                                                   | PID pass-through                                                                                                                                            | PID pass-through                                                                                                                                            | PID pass-through                                                                                                                                            |
| Tuner Section  | DVB-S                                                                                                                                                       | Input Frequency                                                                                                                                             | Input Frequency                                                                                                                                             | 950-2150MHz                                                                                                                                                 |
| Tuner Section  | DVB-S                                                                                                                                                       | Symbol Rate                                                                                                                                                 | Symbol Rate                                                                                                                                                 | 0.5~45 Msps                                                                                                                                                 |
| Tuner Section  | DVB-S                                                                                                                                                       | Constellation                                                                                                                                               | Constellation                                                                                                                                               | QPSK                                                                                                                                                        |

|               |         |                                |                                |                                                                                                                                                                            |
|---------------|---------|--------------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tuner Section | DVB-S   | FEC                            | FEC                            | 1/2, 2/3, 3/4, 5/6, 7/8                                                                                                                                                    |
| Tuner Section | DVB-S2  | Input Frequency                | Input Frequency                | 950-2150MHz                                                                                                                                                                |
| Tuner Section | DVB-S2  | Symbol Rate                    | Symbol Rate                    | QPSK/8PSK/16A<br>PSK: 0.5~45<br>MSPS<br>32APSK: 0.5~40<br>MSPS                                                                                                             |
| Tuner Section | DVB-S2  | Constellation                  | Constellation                  | QPSK/8PSK/16A<br>PSK/32APSK                                                                                                                                                |
| Tuner Section | DVB-S2  | FEC                            | FEC                            | QPSK: 1/2, 3/5,<br>2/3, 3/4, 4/5, 5/6,<br>8/9, 9/10 8PSK:<br>3/5, 2/3, 3/4, 5/6,<br>8/9, 9/10<br>16APSK: 2/3,<br>3/4, 4/5, 5/6, 8/9,<br>9/10 32APSK:<br>3/4, 4/5, 5/6, 8/9 |
| Tuner Section | DVB-S2  | Max input bitrate<br>per tuner | Max input bitrate<br>per tuner | ≤170 Mbps                                                                                                                                                                  |
| Tuner Section | DVB-S2X | Symbol Rate                    | Symbol Rate                    | QPSK/8PSK/16A<br>PSK: 0.5~45<br>MSPS;<br>8APSK/32APSK:<br>0.5~40 MSPS                                                                                                      |
| Tuner Section | DVB-S2X | Constellation                  | Constellation                  | QPSK/8PSK/16A<br>PSK/8APSK/32A<br>PSK                                                                                                                                      |

|               |                               |                               |                                              |                                                                                                                                                                                                                                                                                                                                              |
|---------------|-------------------------------|-------------------------------|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tuner Section | DVB-S2X                       | FEC                           | FEC                                          | QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20<br>8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18<br>8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90<br>32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9 |
| Tuner Section | DVB-S2X                       | Max input bitrate per tuner   | Max input bitrate per tuner                  | ≤170 Mbps                                                                                                                                                                                                                                                                                                                                    |
| Tuner Section | Signal Strength               | -65 ~ -25dBm                  | -65 ~ -25dBm                                 | -65 ~ -25dBm                                                                                                                                                                                                                                                                                                                                 |
| System        | Web management:100M NMS port  | Web management:100M NMS port  | Web management:100M NMS port                 | Web management:100M NMS port                                                                                                                                                                                                                                                                                                                 |
| System        | Language: English and Chinese | Language: English and Chinese | Language: English and Chinese                | Language: English and Chinese                                                                                                                                                                                                                                                                                                                |
| System        | Ethernet software upgrade     | Ethernet software upgrade     | Ethernet software upgrade                    | Ethernet software upgrade                                                                                                                                                                                                                                                                                                                    |
| General       | Dimensions                    | Dimensions                    | 482mm×328mm×44mm (W×L×H)                     | 482mm×328mm×44mm (W×L×H)                                                                                                                                                                                                                                                                                                                     |
| General       | Weight                        | Weight                        | 3.5kg                                        | 3.5kg                                                                                                                                                                                                                                                                                                                                        |
| General       | Temperature                   | Temperature                   | 0~45℃(operation), -20~80℃(storage)           | 0~45℃(operation), -20~80℃(storage)                                                                                                                                                                                                                                                                                                           |
| General       | Power supply                  | Power supply                  | AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz | AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz                                                                                                                                                                                                                                                                                                 |

|         |             |             |      |      |
|---------|-------------|-------------|------|------|
| General | Consumption | Consumption | ≤40W | ≤40W |
|---------|-------------|-------------|------|------|

### About Us

***FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.***

**Contact:Tomleequan Email■[sales@fmuser.com](mailto:sales@fmuser.com) whatsapp: +8613922702227**