


FMUSER FUQ-5315K Encoder 4-8-12 HDMI Inputs IP Output MPEG-4 AVC-H264 LC-AAC-HE-AAC Web Management for IP Broadcasting

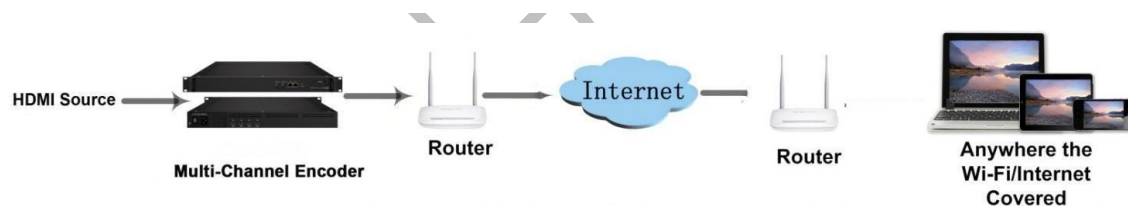


Product Overview

The FMUSER FUQ-5315K is a multi-channel encoder with 4/8/12 HDMI inputs, supporting MPEG-4 AVC/H.264 video and LC-AAC/HE-AAC audio encoding. It streams content via UDP, RTSP, RTMP, HTTP, and HLS protocols for reception on PCs and mobile devices. Controlled through web-based management, it enables easy updates. Ideal for professional IP broadcasting in live streaming and digital media distribution.

Key feature

Allows control and updates via web-based management.* Support MPEG-4 AVC/H.264 video encoding and LC-AAC or HE-AAC Audio encoding

Inner Principle Chart (Per Module)

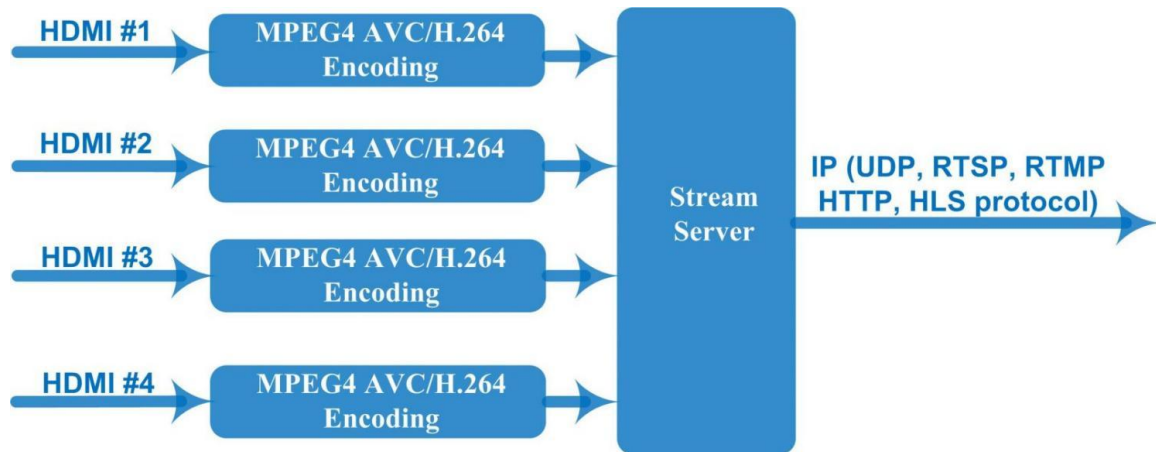

Specifications

Input	4/8/12 HDMI inputs	4/8/12 HDMI inputs	4/8/12 HDMI inputs	4/8/12 HDMI inputs	4/8/12 HDMI inputs
Encoder Section	Video	Resolution	Resolution	Input	Output
Encoder Section	Video	Resolution	Resolution	1920x1080_60p, 1920x1080_60i	1920x1080_30p
Encoder Section	Video	Resolution	Resolution	1920x1080_50p, 1920x1080_50i	1920x1080_25p
Encoder Section	Video	Resolution	Resolution	1280x720_60p	1280x720_30p
Encoder Section	Video	Resolution	Resolution	1280x720_50p	1280x720_25p
Encoder Section	Video	Resolution	Resolution	720x480_60i	720x480_30p
Encoder Section	Video	Resolution	Resolution	720x576_50i	720x576_25p
Encoder Section	Video	Encoding	Encoding	MPEG-4 AVC/H.264 (Baseline profile, Main profile, High profile)	MPEG-4 AVC/H.264 (Baseline profile, Main profile, High profile)
Encoder Section	Video	Bit rate	Bit rate	1Mbps~13Mbps	1Mbps~13Mbps

Encoder Section	Video	Rate Mode	Rate Mode	CBR, VBR	CBR, VBR
Encoder Section	Video	GOP Size	GOP Size	25~50	25~50
Encoder Section	Audio	Encoding	Encoding	LC-AAC or HE-AAC	LC-AAC or HE-AAC
Encoder Section	Audio	Sampling rate	Sampling rate	48KHz input, 44.1KHz output	48KHz input, 44.1KHz output
Encoder Section	Audio	Bitrate	Bitrate	LC-AAC : 48, 64, 96, 128, 256 kbps HE-AAC : 48, 64 kbps	LC-AAC : 48, 64, 96, 128, 256 kbps HE-AAC : 48, 64 kbps
Stream out	IP out over UDP (Unicast /Multicast) , RTSP, RTMP, HTTP, HLS (RJ45, 100M) ASI output port and Data port are not applicable currently	IP out over UDP (Unicast /Multicast) , RTSP, RTMP, HTTP, HLS (RJ45, 100M) ASI output port and Data port are not applicable currently	IP out over UDP (Unicast /Multicast) , RTSP, RTMP, HTTP, HLS (RJ45, 100M) ASI output port and Data port are not applicable currently	IP out over UDP (Unicast /Multicast) , RTSP, RTMP, HTTP, HLS (RJ45, 100M) ASI output port and Data port are not applicable currently	IP out over UDP (Unicast /Multicast) , RTSP, RTMP, HTTP, HLS (RJ45, 100M) ASI output port and Data port are not applicable currently
System	Remote control	Remote control	Network management (WEB)	Network management (WEB)	Network management (WEB)
System	Language	Language	Chinese and English	Chinese and English	Chinese and English
System	Upgrade	Upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Operation temperature	Operation temperature	0~45℃(work), -20~80℃Storage	0~45℃(work), -20~80℃Storage	0~45℃(work), -20~80℃Storage
General	Power supply	Power supply	AC 100-240V 50/60Hz 2A	AC 100-240V 50/60Hz 2A	AC 100-240V 50/60Hz 2A
General	Dimensions	Dimensions	482mm×328mm×44mm	482mm×328mm×44mm	482mm×328mm×44mm

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227

FMUSER 广东卫视