

**FMUSER FUQ-8322 DVB-T Digital Transmitter 1 Input 1 Output 470-806MHz
Frequency Range 4-64 QAM Modulation LDMOS Amplifier Technology High
Linearity AGC Control Terrestrial TV Broadcast Emergency Backup**





Product overview

The FUQ-8322 is a DVB-T digital transmitter with configurable 200W-600W RF output, featuring LDMOS amplifier technology for high linearity. It processes HD/SD signals with 4/16/32/64 QAM modulation, supporting both SFN ($\pm 1\text{Hz}$ sync) and MFN ($\pm 100\text{Hz}$) network modes via 470-806MHz frequency range. This 2U rack-mount unit integrates AGC control, modular redundancy, and intelligent air cooling for 24/7 broadcast operations. Ideal for terrestrial TV transmission and emergency backup systems.


Key feature

Features low-noise cooling and multi-stage lightning protection

Specifications

Item	Item	Technical Spec
Basic Parameter	Standard	DVB-(T)
Basic Parameter	Modulation Mode	support 4/16/32/64 QAM mode
Basic Parameter	Working frequency	470MHz~806MHz
Basic Parameter	Output rating	200W/300W/400W/500W/600W Optional
Basic Parameter	Frequency accuracy	MFN: $\leq \pm 100\text{Hz}$ / SFN: $\leq \pm 1\text{Hz}$
Basic Parameter	L.O. Phase Noise	$\leq -70\text{dBc}@10\text{Hz}$
Basic Parameter	L.O. Phase Noise	$\leq -90\text{dBc}@100\text{Hz}$
Basic Parameter	L.O. Phase Noise	$\leq -100\text{dBc}@1\text{kHz}$
Basic Parameter	L.O. Phase Noise	$\leq -105\text{dBc}@10\text{kHz}$
Basic Parameter	L.O. Phase Noise	$\leq -115\text{dBc}@100\text{kHz}$
Basic Parameter	L.O. Phase Noise	$\leq -130\text{dBc}@1\text{MHz}$
Basic Parameter	variation of output power	$\pm 0.2\text{dB}$
Basic Parameter	Inband spectrum ripple	$\pm 0.5\text{dB}$ @ $f_c \pm 3.591\text{MHz}$
Basic Parameter	Shoulder Level	$\leq -40\text{dB}$ @ Central frequency, $\text{IF} \pm 4.2\text{MHz}$
Basic Parameter	MER	$\geq 36\text{dB}$
Output Character	Output impedance	50Ω
Output Character	output reflection loss	$\geq 20\text{dB}$
Output Character	Output interface	200W/300W/400W: L29-K; 500W/600W: 1-5/8", directly-fed
Environment Condition	Working temperature	$-20 \sim +50^\circ\text{C}$
Environment Condition	Storage temperature	$-30 \sim +75^\circ\text{C}$
Environment Condition	Relatively humidity	$\leq 95\%$ (25 $^\circ\text{C}$ no condensation)
Environment Condition	Cooling mode	inside cooling fan
Environment Condition	atm press	86~106kPa
Environment Condition	power supply	AC, $220 \pm 20\%$, 50Hz AC, $380 \pm 20\%$, 50Hz
Environment Condition	Machine room requirement	less dust, no friction

Principle Chart

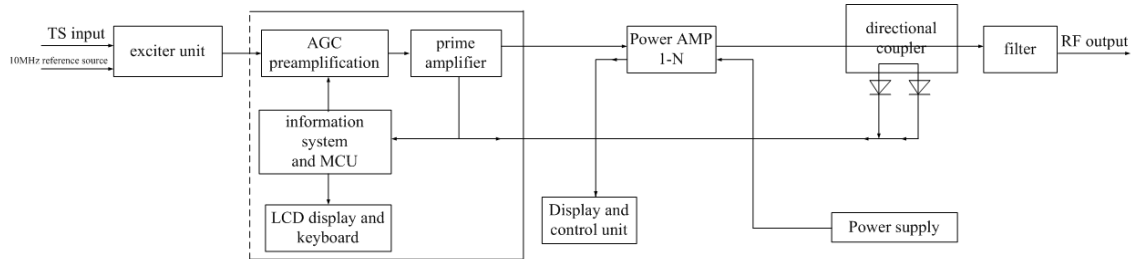

Main Components List (Standard Configuration)

S/N	Component	200W	300W	400W	500W	600W	Remarks
S/N	Component	Qty (piece)	Qty (piece)	Qty (piece)	Qty (piece)	Qty (piece)	
1	Cabinet/ Rack	N/A	1	1	1	1	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.

2	Power Supply	1 (Built-in)	1	1	1	2	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.
3	Exciter	1 (Built-in)	1	1	1	1	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.
4	Power Amplifier	1 (Built-in)	1	1	1	2	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.

5	Monitor Unit	N/A	1	1	1	1	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.
6	Filter	1 (Built-in)	1	1	1	1	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227