

**FMUSER FUQ-8322 200W-600W DVB-T Transmitter Adjustable Output Power
LDMOS Amplifier SFN-MFN Operation Professional Broadcast Terrestrial TV**



Copyright © 2014-2022 FMUSER



Product overview

The FMUSER FUQ-8322 is a professional-grade DVB-T transmitter with 200W-600W adjustable output. It processes RF signals through LDMOS amplifier technology, supporting both SFN ($\pm 1\text{Hz}$ accuracy) and MFN ($\pm 100\text{Hz}$) operation modes. The 2U rack-mount unit features intelligent AGC control and multi-stage lightning protection, ideal for terrestrial TV broadcasting and single-frequency network deployments.


Key feature

2U rack design with efficient cooling system

Specifications

Item	Item	Technical Spec
Basic Parameter	Standard	DVB-(T)
Basic Parameter	Modulation Mode	support 4/16/32/64 QAM mode
Basic Parameter	Working frequency	470MHz~806MHz
Basic Parameter	Output rating	200W/300W/400W/500W/600 W Optional
Basic Parameter	Frequency accuracy	MFN: $\leq \pm 100\text{Hz}$ / SFN: $\leq \pm 1\text{Hz}$
Basic Parameter	L.O. Phase Noise	$\leq -70\text{dBc}@10\text{Hz}$
Basic Parameter	L.O. Phase Noise	$\leq -90\text{dBc}@100\text{Hz}$
Basic Parameter	L.O. Phase Noise	$\leq -100\text{dBc}@1\text{kHz}$
Basic Parameter	L.O. Phase Noise	$\leq -105\text{dBc}@10\text{kHz}$
Basic Parameter	L.O. Phase Noise	$\leq -115\text{dBc}@100\text{kHz}$
Basic Parameter	L.O. Phase Noise	$\leq -130\text{dBc}@1\text{MHz}$
Basic Parameter	variation of output power	$\pm 0.2\text{dB}$
Basic Parameter	Inband spectrum ripple	$\pm 0.5\text{dB}$ @ $\pm 3.591\text{MHz}$
Basic Parameter	Shoulder Level	$\leq -40\text{dB}$ @ Central frequency, $\text{IF} \pm 4.2\text{MHz}$
Basic Parameter	MER	$\geq 36\text{dB}$
Output Character	Output impedance	50Ω
Output Character	output reflection loss	$\geq 20\text{dB}$
Output Character	Output interface	200W/300W/400W: L29-K; 500W/600W: 1-5/8", directly-fed
Environment Condition	Working temperature	$-20 \sim +50^\circ\text{C}$
Environment Condition	Storage temperature	$-30 \sim +75^\circ\text{C}$
Environment Condition	Relatively humidity	$\leq 95\%$ (25°C no condensation)
Environment Condition	Cooling mode	inside cooling fan
Environment Condition	atm press	86~106kPa
Environment Condition	power supply	AC, $220 \pm 20\%$, 50Hz AC, $380 \pm 20\%$, 50Hz
Environment Condition	Machine room requirement	less dust, no friction

Principle Chart

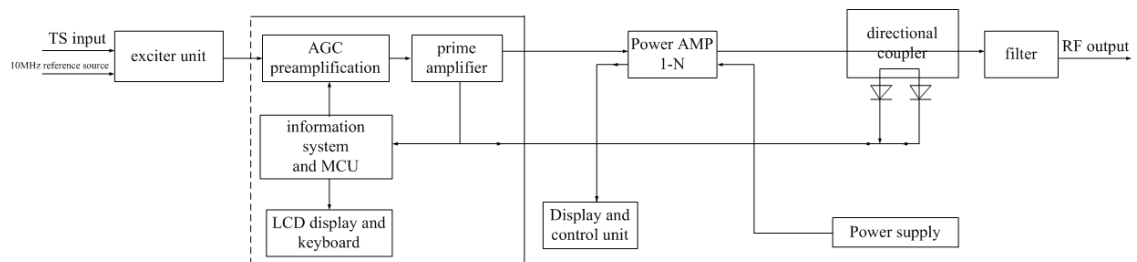

Main Components List (Standard Configuration)

S/N	Component	200W	300W	400W	500W	600W	Remarks
S/N	Component	Qty (piece)	Qty (piece)	Qty (piece)	Qty (piece)	Qty (piece)	
1	Cabinet/ Rack	N/A	1	1	1	1	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.

2	Power Supply	1 (Built-in)	1	1	1	2	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.
3	Exciter	1 (Built-in)	1	1	1	1	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.
4	Power Amplifier	1 (Built-in)	1	1	1	2	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.

5	Monitor Unit	N/A	1	1	1	1	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.
6	Filter	1 (Built-in)	1	1	1	1	These configuration is standard. If customer need certain redundancy component, it is available and negotiable.

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)