


**FMUSER FUQ-8351 Digital Transmitter 10W-100W Output DVB-T-ATSC-ISDB-T
Input-Output Compliance LDMOS Amplifier AGC Control SFN-MFN Terrestrial
Broadcasting**

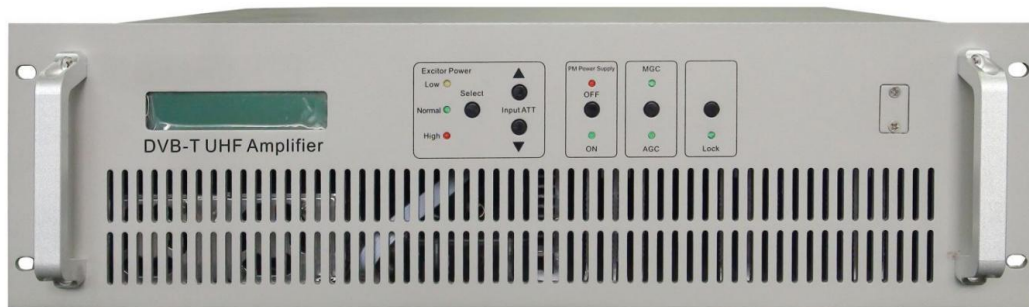

Product overview

The FUQ-8351 is a DVB-T/ATSC/ISDB-T compliant digital transmitter with 10W-100W adjustable output via LDMOS amplification. It processes MPEG-2/4 signals with AGC stability, housed in a 482x504x132mm rack-mount chassis. Designed for SFN/MFN deployments, it supports 470-806MHz frequency range with LED alarm monitoring, ideal for terrestrial TV broadcasting and emergency backup systems.

Key feature

Features real-time monitoring via LED alarms and fault self-diagnosis

Monitoring Objects and Alarm Status

Monitoring Objects	Alarm Status
Power Supply	abnormal
Overheating	alert
Amplifier	abnormal
Antenna feed system	abnormal

Phase noise

Center frequency deviation (Hz)	Local oscillator (dBc/Hz)
@10	≤ -70

@100	≤ -85
@1k	≤ -95
@10 k	≤ -100
@100 k	≤ -111
@1 M	≤ -125

Electrical Parameters

Item	Item	Technical specs
Basic Parameters	TV Standard	DVB-T/ATSC/ISDB-T
Basic Parameters	Modulating mode	4/16/32/64 QAM
Basic Parameters	Frequency stability (3 months)	External Frequency Range: $\leq 10^{-10}$
Basic Parameters	Frequency stability (3 months)	Internal Frequency Range: $\leq 10^{-7}$
Basic Parameters	Frequency accuracy	MFN: $\pm 100\text{Hz}$ / SFN: $\pm 1\text{Hz}$
Basic Parameters	Local oscillator phase noise	See table above
Basic Parameters	In-band stray	$\leq -60\text{dBc}$
Basic Parameters	In-band ripple $\text{fc} \pm 3.591\text{MHz}$	$\pm 0.5\text{dB}$
Basic Parameters	Out-of-band rejection	$\leq -65\text{dBc}$
Input	Frequency range	470MHz~806MHz (any 100MHz bandwidth)
Input	level	$-20 \pm 3\text{dBm}$
Input	Input reflection loss	$\geq 15\text{dB}$
Input	connector	N-K
Output	Output power	10W, 20W, 30W, 50W, 100W Optional
Output	Frequency range	470MHz~806MHz (any 100MHz bandwidth)
Output	Output impedance	50Ω
Output	In-band ripple ($\text{fc} \pm 3.591\text{MHz}$)	$\pm 0.5\text{dB}$

Output	Shoulder level	≥40dB@central frequency FC±4.2MHz (after correction, single channel)
Output	MER	≥35dB (after correction, single channel)
Output	output reflection loss	≥26dB
Output	Output power variation	±0.25dB
Output	Inner adjacent channel transmission power	Inner adjacent channel transmission power : in-band transmission power≤-60dB, meet that Inner adjacent channel transmission power≤13mW
Output	External adjacent channel transmission power	External adjacent channel transmission power : in-band transmission power≤-65dB, meet that Inner adjacent channel transmission power≤13mW
Environment condition	Working temperature	-20~+50■
Environment condition	Storage temperature	-30~+75■
Environment condition	Relatively humidity	■95%■no condensation at 25■
Environment condition	atm press	86~106kPa
Environment condition	power supply	AC, 220V±10%/50Hz
Environment condition	Case size (L/W/H)	482x504x132mm

Optical Signal Parameters

Item	Unit	Technical Specs
Optical wavelength	nm	1100-1600
nominal optical input power	dBm	-1
Input optical power range	dBm	-15~+2
Max input optical power	dBm	+3
Optical interface		FC/APC

optical reflection loss	dB	■45
-------------------------	----	-----

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227