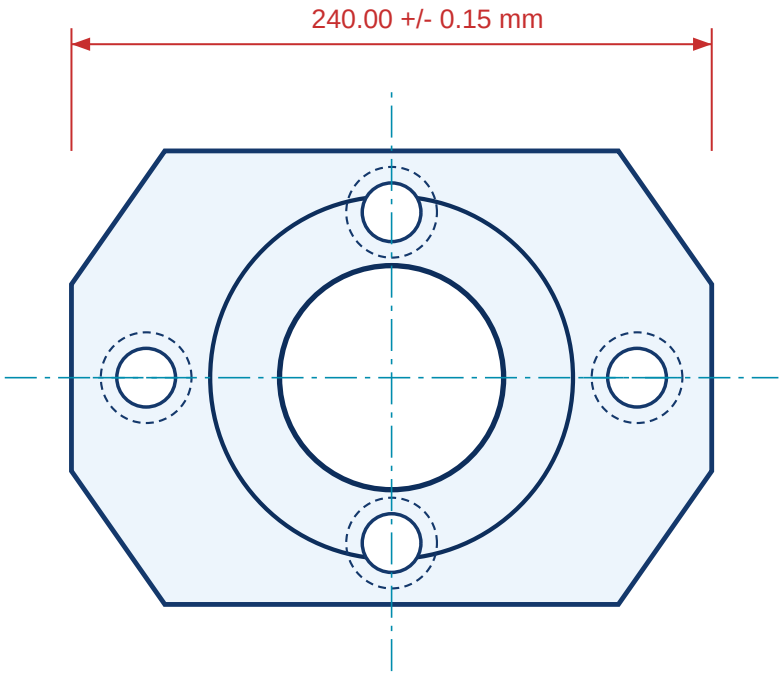

FRONT VIEW (SCALE 1:1)

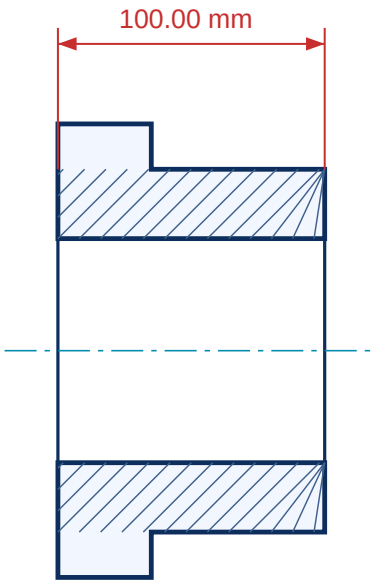

SECTION A-A

⌖	POS 0.05 M	A	B

ENGINEERING NOTES (ASME Y14.5-2018):

1. MATERIAL: AL 6061-T6 BILLET, ANODIZE MIL-A-8625 TYPE II.
2. BREAK ALL SHARP EDGES 0.50 X 45 DEG MAX UNLESS SPECIFIED.
3. BORE DIA 84.00 H7 (+0.035 / -0.000) CONCENTRIC TO DATUM A.
4. EXPORT TARGET: ISO/IEC 8632 CGM BINARY / S1000D / SIEMENS NX.

FLANGED BEARING HOUSING - REV C		SHEET 1 OF 2
PART NO: NX-4020-CGM	UNITS: MILLIMETERS	SCALE: 1:1
CAD EXCHANGE: ISO 8632-3 BINARY / ISO 2768-mK	TOL: ISO 2768-mK	SIZE: A4-L

PRELOAD TORQUE VS CLAMP LOAD CURVE

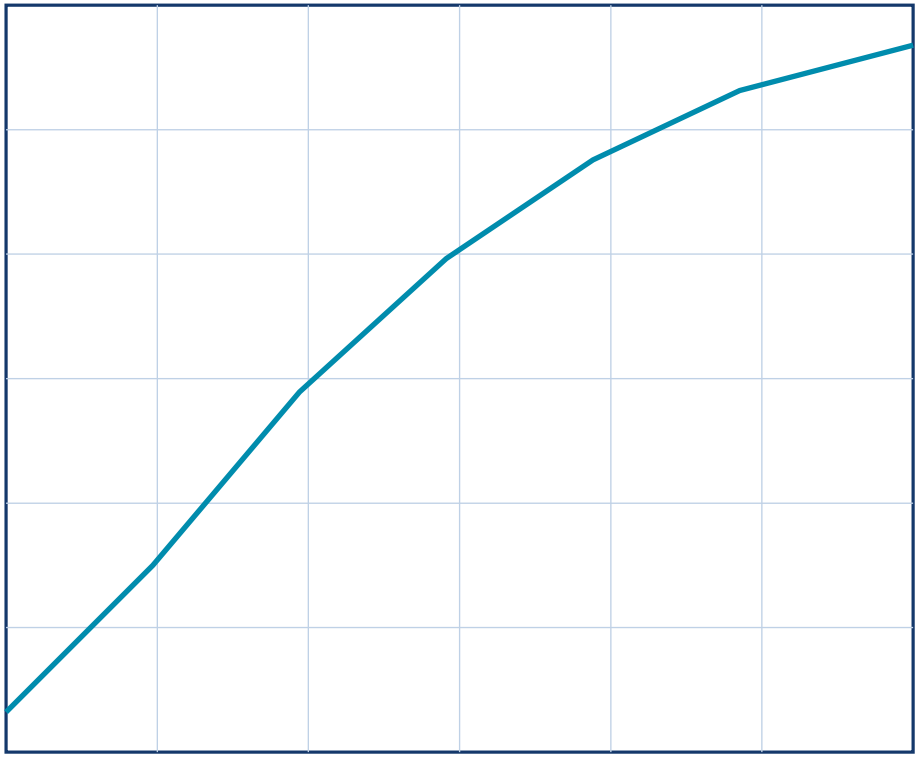

INSPECTION & FIT SCHEDULE

FEATURE	NOMINAL	TOLERANCE
MAIN BORE	84.00 mm	+0.035 / -0.000
PILOT OD	136.00 mm	+0.000 / -0.040
BOLT CIRCLE	184.00 mm	POS 0.05 M
MOUNT HOLES	4X 22.00 mm	+0.15 / -0.00
FLANGE THK	17.00 mm	+/- 0.10 mm

FLANGED BEARING HOUSING - SCHEDULE

PART NO: NX-4020-CGM | SHEET 2 OF 2