


pocket_sdr.py help

Pocket SDR ver. 0.16 2026-06-01

Initial Window

Page Tabs:

Tabs to switch
current page

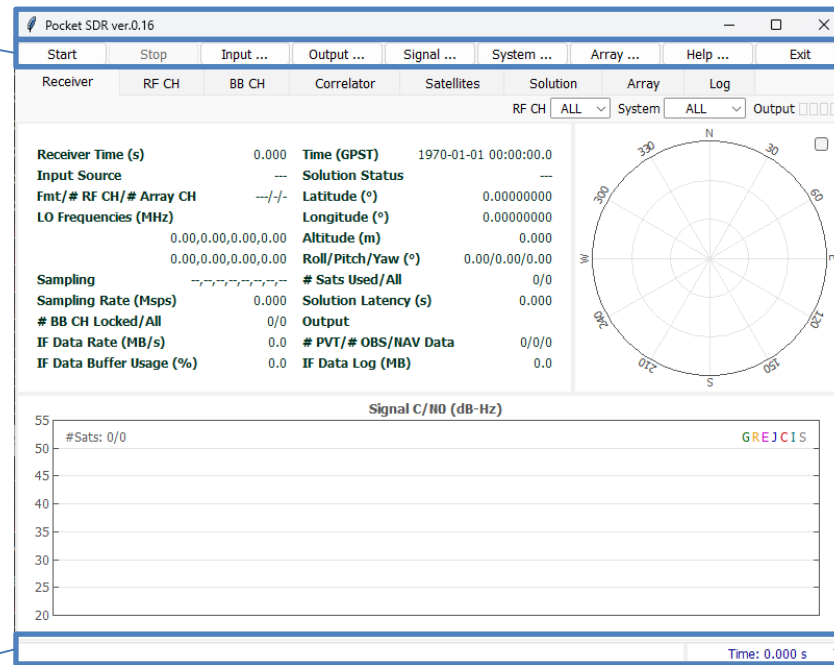

Command Buttons

- Start : Start the receiver
- Stop : Stop the receiver
- Input... : Show Input Options dialog
- Output... : Show Output Options dialog
- Signal... : Show Signal Options dialog
- System... : Show System Options dialog
- Array... : Show Array Options dialog
- Help : Show Help dialog
- Exit : Exit the receiver

Status Bar:

Status info or error
message for the
receiver

Receiver Time:
Elapsed time since the
receiver started (s)

Receiver Page

Receiver Time:

Elapsed time since the receiver started

Input Source:

IF data source (RF_Frontend or IF_Data)

Fmt/# RF CH/# Array CH:

IF data format *3 and number of CHs

LO Frequencies (MHz):

Local oscillator frequencies for each RF CH (MHz)

Sampling:

IF data sampling type for each RF CH (I or IQ)

Sampling Rate (Msps):

IF data sampling rate

BB CH Locked/All:

Number of BB CHs tracked and all

IF Data Rate (MB/s):

IF data transfer rate

IF Data Buffer Usage (%):

Receiver internal IF data buffer usage rate

Time (GPST):

PVT Solution time in GPST

Solution Status:

PVT Solution status (- or FIX)

Latitude, Longitude and Altitude:

PVT Solution latitude/ longitude (deg) and ellipsoidal height (m)

Roll/Pitch/Yaw (deg):

Attitude solution by antenna array

Sats Used / All:

Number of used satellites for PVT and all satellites with OBS data

Solution Latency (s):

PVT Solution latency


PVT/# OBS/NAV Data:

Total count of PVT solutions, OBS and NAV data

IF Data Log (MB):

Recorded size of IF Data log

Receiver Status Panel

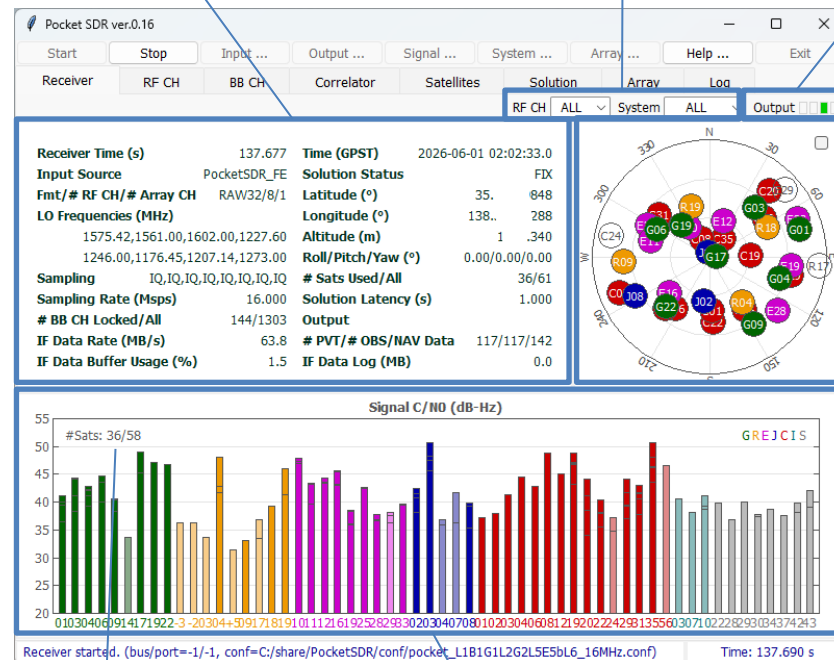

RF CH and System Selection for Skyplot and C/N0 Plot

Output Status Indicators

for PVT solution, OBS/NAV data, receiver log and IF data log

Orange: waiting for connection

Green: data OK

Light-Green: data active

Red: error

White: no output

Satellite Positions in Skyplot *1 *2

Number of used satellites and all satellites with OBS data

Signal C/N0 (dB-Hz) Plot for Each Satellite and Signals (stacked) *1 *2

* 1 GNSS System Color:

Green: GPS

Orange: GLONASS

Magenta: Galileo

Blue: QZSS

Red: BeiDou

Blue-Green: NavIC

Grey: SBAS


White or light-color:

unused satellites for solution

*2 Satellite ID complies with RINEX convention

*3 INT8 (int8 I-sampling), INT8X2 (interleaved-int8 IQ-sampling), RAW8, RAW16, RAW32 (Pocket SDR FE), CS8 or CS16 (SoapySDR devices)

RF CH Page

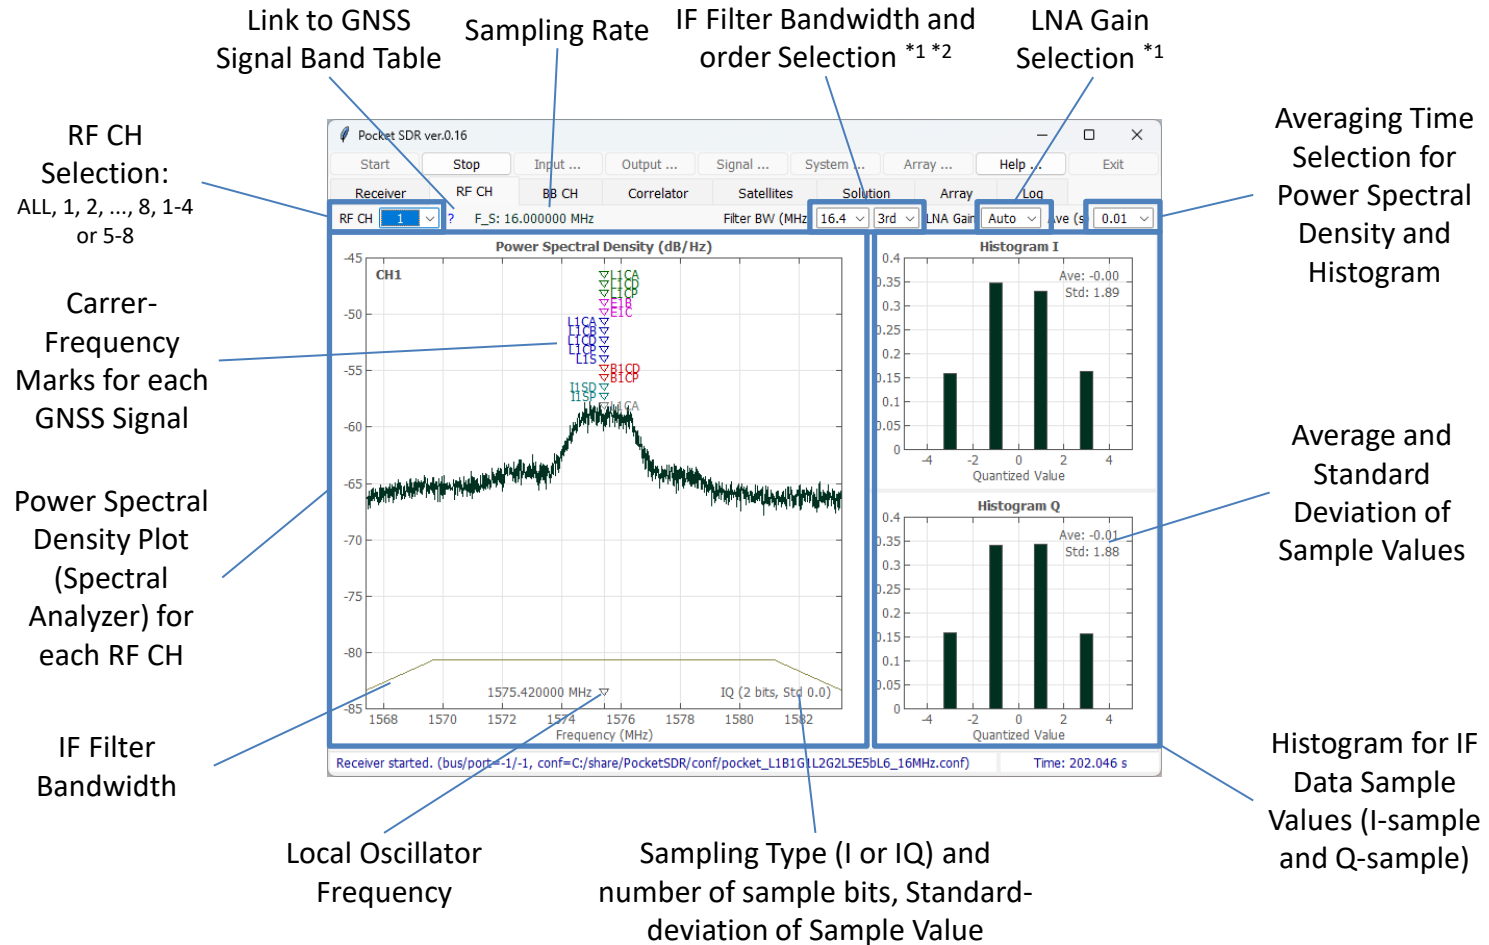

*1 Only valid for RF_Frontend Input, *2 Only valid for IQ-sampling

BB CH Page

RF CH Selection:
ALL, 1, 2, ..., 8

GNSS System Selection:
ALL, GPS, GLONASS, ...

BB CH State Selection:
LOCK or ALL

Link to GNSS Signal Table

Internal IF Data Buffer Usage Rate in %

BB CH No Searching Signal

Status for each BB CH:

CH : BB CH no

RF : Assigned RF CH no for BB CH

SAT : Satellite ID

SIG : Signal ID

PRN : PRN number or FCN for GLONASS FDMA signal

LOCK : Continuous lock time (s)

C/N0 : Signal C/N0 (dB-Hz)

(dB-Hz) : Signal C/N0 Bar (20-50 dB-Hz)

COFF : Code offset (ms)

DOP : Doppler frequency (Hz)

ADR : Accumulated Doppler range (cycle)

SYNC : Synchronization status

#NAV : Decoded subframe or message count

#ERR : NAV data error count

#LOL : Loss-of-lock count

FEC : Number of error bits corrected by FEC (-1: correction unable)


Number of Locked and All BB CHs

Synchronization Status:

S : Secondary code sync
 B : NAV symbol (bit) sync
 F : Subframe or message sync
 R : Polarity of subframe or message sync (R: reversed)

CH	RF	SAT	SIG	PRN	LOCK(s)	C/N0	(dB-Hz)	COFF(ms)	DOP(Hz)	ADR(cyc)	SYNC	#NAV	#ERR	#LOL	FEC
1	1	G01	L1CA	1	236.66	41.5		0.8602798	-630.1	-146896.8	-BF-	39	0	0	0
3	1	G03	L1CA	3	236.63	45.3		0.8420837	-989.0	-223683.2	-BFR	39	0	0	0
4	1	G04	L1CA	4	236.60	42.8		0.1926022	3521.0	847876.6	-BF-	38	0	0	0
6	1	G06	L1CA	6	236.55	46.9		0.9626088	3366.2	802515.0	-BF-	38	0	0	0
9	1	G09	L1CA	9	236.45	40.4		0.7548684	4917.2	1170753.7	-BF-	38	0	0	0
17	1	G17	L1CA	17	236.11	49.9		0.5649584	1809.7	441658.5	-BFR	38	0	0	0
19	1	G19	L1CA	19	236.03	47.7		0.5573421	3972.4	949898.4	-BFR	38	0	0	0
22	1	G22	L1CA	22	235.96	45.8		0.2726595	-380.4	-77643.2	-BF-	38	0	0	0
37	3	R18	G1CA	-3	235.29	40.2		0.6879981	608.2	150818.7	SBF-	115	0	0	0
38	3	R09	G1CA	-2	235.25	38.6		0.8723855	-226.3	-34977.1	-BF-	115	0	0	0
41	3	R+1	G1CA	1	26.95	30.7		0.6080123	6487.6	174825.0	S-	0	0	0	0
43	3	R19	G1CA	3	234.96	44.8		0.7518076	3205.2	759473.1	SBF-	115	0	0	0
44	3	R07	G1CA	4	234.92	43.6		0.2905745	-659.1	-149816.7	-BF-	115	0	0	0
46	3	R04	G1CA	6	234.77	46.6		0.7789974	4814.5	1150278.1	-BFR	115	0	0	0
56	1	E10	E1B	10	233.32	47.4		1.1040484	2060.3	485116.6	-BFR	115	0	0	0
57	1	E11	E1B	11	233.19	42.5		2.6092020	3007.8	705850.3	-BF-	115	0	0	0
58	1	E12	E1B	12	233.15	43.5		0.7695724	1163.1	274649.0	-BFR	115	0	0	0
62	1	E16	E1B	16	231.94	45.7		2.8240763	131.8	42062.4	-BF-	115	0	0	0
65	1	E19	E1B	19	229.37	35.4		1.2180454	3386.8	786790.8	-BFR	113	0	0	0
71	1	E25	E1B	25	225.70	41.3		1.5360948	2611.6	602172.7	-BFR	112	0	0	0
74	1	E28	E1B	28	225.62	37.9		1.3047491	4265.2	966860.6	-BF-	112	0	0	0
75	1	E29	E1B	29	225.46	35.4		1.2631545	1259.1	295828.7	-BF-	111	0	0	0
79	1	E33	E1B	33	225.29	33.7		3.7085662	-16.6	-3560.0	-BF-	111	0	0	0
84	1	J02	L1CA	194	223.62	41.6		0.4579999	2231.5	502019.4	-BFR	36	0	0	0
85	1	J03	L1CA	195	223.57	46.9		0.5533309	1585.8	353692.7	-BFR	36	0	0	0
93	2	C01	B1I	1	222.52	38.1		0.8141688	1888.9	421400.3	-BFR	367	0	0	0
94	2	C02	B1I	2	222.44	37.8		0.3990061	1935.6	432579.9	-BF-	365	0	0	0
95	2	C03	B1I	3	222.42	42.4		0.4992244	1940.3	432480.2	-BFR	367	0	0	0
96	2	C04	B1I	4	222.34	44.4		0.3976521	1958.2	436542.2	-BFR	367	0	0	0
98	2	C06	B1I	6	222.29	42.3		0.2306814	2826.2	632351.0	SBF-	35	0	0	0
100	2	C08	B1I	8	222.22	49.4		0.0097842	2295.1	512369.5	SBF-	35	0	0	0

Correlator Page

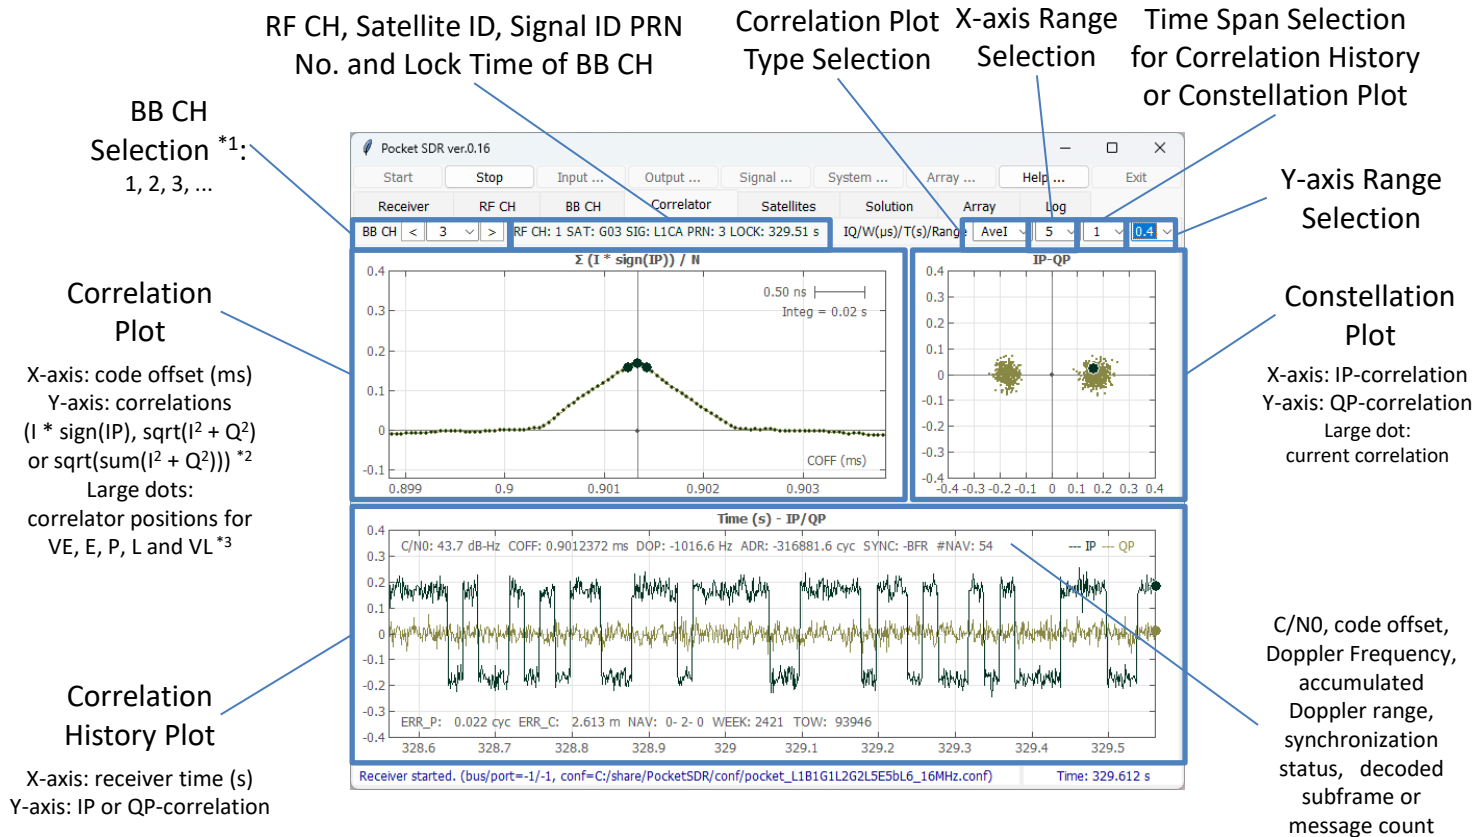

*1 BB CH can be selected by clicking BB CH Status row in BB CH Page

*2 Integration time is based on non-coherent integration time for DLL

*3 VE and VL are only shown in case of BOC-modulation and Bump-Jump enabled

Satellites Page

System Selection

Status for each Satellite:

SAT : Satellite ID
 FCN : Frequency channel no (FCN) for GLONASS FDMA signals
 PVT : Satellite used in PVT solution or not
 OBS : Satellite L1 OBS data availability
 EPH : Satellite ephemeris availability
 SVH : Satellite health flag in ephemeris (HEX)
 AZ : Azimuth angle (deg)
 EL : Elevation angle (deg)
 SIG1 : Signal 1 ID
 C/N0 : C/N0 of signal 1 (dB-Hz)
 SIG2 : Signal 2 ID
 C/N0 : C/N0 for signal 2 (dB-Hz)
 SIG3 : Signal 3 ID
 C/N0 : C/N0 for signal 3 (dB-Hz)
 ...

Number of satellites used for PVT solution, number of satellites tracked, number of all tracked signals

Red: unhealthy satellite
 Grey: unused satellite for PVT solution

SAT	FCN	PVT	OBS	EPH	SVH	AZ(°)	EL(°)	SIG1	C/N0	SIG2	C/N0	SIG3	C/N0	SIG4	C/N0	SIG5	C/N0	SIG6	C/N0
G01	-	OK	OK	OK	00	74.2	16.3	L1CA	40.8	L1CD	37.0	L1CP	41.9	L2CM	35.2	L5I	42.6	L5Q	41.1
G03	-	OK	OK	OK	00	42.2	37.1	L1CA	44.3	L2CM	38.1	L5I	44.3	L5Q	38.8	-	-	-	-
G04	-	OK	OK	OK	00	105.2	34.4	L1CA	43.5	L1CD	39.6	L1CP	44.2	L2CM	42.0	L5I	42.5	L5Q	41.7
G06	-	OK	OK	OK	00	299.8	45.0	L1CA	45.3	L2CM	40.0	L5I	44.8	-	-	-	-	-	-
G09	-	OK	OK	OK	00	145.7	29.5	L1CA	39.5	L2CM	38.2	L5I	42.1	L5Q	39.9	-	-	-	-
G14	-	-	-	OK	00	0.0	0.0	L1CP	33.9	-	-	-	-	-	-	-	-	-	-
G17	-	OK	OK	OK	00	105.0	83.9	L1CA	49.7	L2CM	44.5	-	-	-	-	-	-	-	-
G19	-	OK	OK	OK	00	319.1	59.7	L1CA	47.5	-	-	-	-	-	-	-	-	-	-
G22	-	OK	OK	OK	00	219.4	37.9	L1CA	44.2	-	-	-	-	-	-	-	-	-	-
R04	+6	OK	OK	OK	00	142.5	48.7	G1CA	48.0	G2CA	40.0	G3OCD	42.5	G3OCP	42.4	-	-	-	-
R09	-2	OK	OK	OK	00	264.7	22.8	G1CA	39.1	-	-	-	-	-	-	-	-	-	-
R17	+4	-	OK	OK	00	96.3	3.9	G1CA	42.1	G2CA	36.8	-	-	-	-	-	-	-	-
R18	-3	OK	OK	OK	00	65.7	39.3	G1CA	37.9	G2CA	35.8	-	-	-	-	-	-	-	-
R19	+3	-	-	OK	00	0.0	0.0	G3OCD	41.4	G3OCP	41.3	-	-	-	-	-	-	-	-
E10	-	OK	OK	OK	00	328.2	62.8	E1B	47.2	E1C	46.8	ESA1	47.3	E5AQ	47.1	ESB1	47.2	ESBQ	47.2
E11	-	OK	OK	OK	00	287.7	44.0	E1B	42.2	E1C	42.1	ESA1	40.4	E5AQ	40.4	ESB1	39.2	ESBQ	39.6
E12	-	OK	OK	OK	00	24.3	59.5	E1B	42.9	E1C	43.1	ESA1	43.9	E5AQ	43.7	ESB1	42.1	ESBQ	42.2
E16	-	OK	OK	OK	00	227.1	47.3	E1B	44.6	E1C	44.4	ESA1	45.7	E5AQ	45.5	ESB1	44.5	ESBQ	44.2
E19	-	OK	OK	OK	00	94.3	27.3	E1B	34.2	E1C	34.6	ESA1	38.2	E5AQ	38.1	ESB1	35.4	-	-
E25	-	OK	OK	OK	00	295.5	36.8	E1B	43.6	E1C	43.2	ESA1	43.1	E5AQ	43.2	ESB1	40.6	ESBQ	40.8
E28	-	OK	OK	OK	00	127.0	24.1	E1B	37.5	E1C	37.7	ESA1	40.7	E5AQ	40.7	ESB1	40.4	ESBQ	40.6
E29	-	-	OK	OK	00	47.0	12.0	E1B	36.2	E1C	36.2	ESA1	38.1	E5AQ	38.2	ESB1	36.0	ESBQ	36.2
E33	-	OK	OK	OK	00	67.5	15.6	E1B	37.8	E1C	37.2	ESA1	39.2	E5AQ	39.5	ESB1	37.1	ESBQ	37.2
J02	-	OK	OK	OK	00	187.8	55.4	L1CA	43.4	L1CD	39.7	L1CP	44.6	L1S	43.7	L2CM	38.4	L5I	42.1
J03	-	OK	OK	OK	00	338.6	86.0	L1CA	46.3	L1CD	45.7	L1CP	50.1	L1S	48.7	L2CM	45.3	L5I	41.2
J04	-	-	-	OK	10	0.0	0.0	L1CP	35.7	L1S	36.4	L5I	40.8	L6E	34.6	-	-	-	-
J07	-	-	-	-	-	0.0	0.0	L1CP	35.4	L1S	41.6	L5Q	36.6	-	-	-	-	-	-
J08	-	OK	OK	OK	10	242.2	25.0	L1CB	39.0	L1CD	34.0	L1CP	37.6	L5Q	38.4	L5SQV	38.0	-	-
C01	-	OK	OK	OK	00	177.2	49.0	B1I	36.5	B2BI	36.6	B3I	39.8	-	-	-	-	-	-
C02	-	OK	OK	OK	00	248.5	15.5	B1I	39.0	B3I	38.5	-	-	-	-	-	-	-	-
C03	-	OK	OK	OK	00	221.0	27.7	B1I	42.0	B2BI	42.0	B3I	41.6	-	-	-	-	-	-

Receiver started. (bus/port=-1/-1, conf=C:/share/PocketSDR/conf/pocket_L1B1G1L2G2L5E5B6_16MHz.conf) Time: 366.148 s

Solution Page

PVT Solution Plot
Selection:
Pos ENU or Pos Horiz


Show Ref Pos
Dialog Button

PVT Solution
Clear Button

Time Span and Y-axis
Range Selections

PVT Solution Plot:
Pos E, N, U: position errors
east-west, north-south,
up-down *¹,
Sats: Number of used/all
satellites
or
Position error horizontal *¹
(east-west and north-west,
horizontal scatter plot)

Current Solution and
Number of Used/All
Satellites

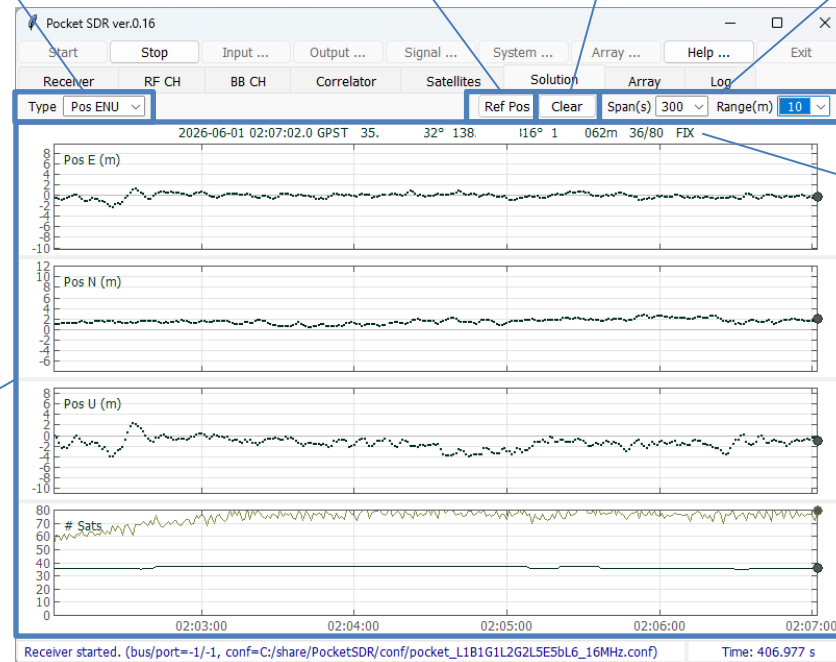

Ref Pos Dialog

*¹ The reference position is automatically selected from the first epoch solution.
It can be modified by using Ref Pos Dialog

Array Page

Array Calibration Status:
STOP or RUN, Total epochs for calibration and RMS residuals

Array Calibration Targets:
Both: Dealy and Attiude
Delay: Delay only
Att: Attitude only

Array Calibration Operation Buttons:
Start or Stop, Clear, Load and Save

Pocket SDR ver.0.16

Start Stop Input ... Output ... Signal ... System ... Array ... Help ... Exit

Receiver RF CH BB CH Correlator Satellites Solution Array Log

CALIB: STOP EPOCHS: 0 RMS: 0.0000 m Calibration Both Start Clear Load Save

RF CH DELAY

CH1: 0.0000 m CH2: 0.0000 m CH3: 0.0000 m CH4: 0.0000 m
CH5: 0.0000 m CH6: 0.0000 m CH7: 0.0000 m CH8: 0.0000 m

ARRAY ATTITUDE

ROLL: 0.000° PITCH: 0.000° YAW: 0.000°

ARRAY CH BEAM DIRECTION

CH	AZ	EL	Update
CH9	0.000 °	90.000 °	Update
CH10	0.000 °	90.000 °	Update
CH11	0.000 °	90.000 °	Update
CH12	0.000 °	90.000 °	Update
CH13	0.000 °	90.000 °	Update
CH14	0.000 °	90.000 °	Update
CH15	0.000 °	90.000 °	Update
CH16	0.000 °	90.000 °	Update

Receiver started. (bus/port=-1/-1, conf=C:/share/PocketSDR/conf/pocket_L1B1G1L2G2L5E5bL6_16MHz.conf) Time: 474.823 s

RF CH DELAY:
RF CH delay calibration results referenced to RF CH1

ARRAY ATTITUDE:
Array attitude calibration results (ROLL, PITCH, YAW angles)

ARRAY CH BEAM DIRECTION:
Beam direction control for each Array CH. Set AZ (azimuth) and EL (elevation) angles and push Update Button.


Log Page

Additional Receiver Log Filter:
filter string, like G01 or L1CA, separated
by spaces, | indicates OR condition
(e.g., G10|G02|G03)

Receiver Log
Pause Button

Receiver Log
Clear Button

Receiver Log
Type Selection:
Blank: all log

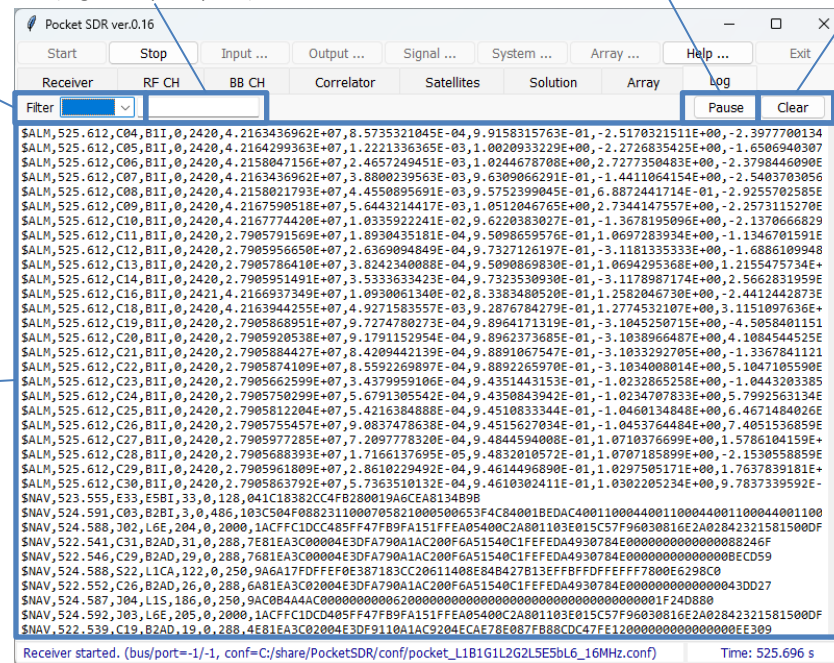Receiver
Logs ^{*1} ^{*2}

*1 Refer p.15 for the receiver log formats

*2 To copy the logs to Clip-board, push Pause button, select the logs and push Ctrl-C of the keyboard

Input Options Dialog

Input Source Selection:
RF Frontend or IF Data

Device Configuration File:
RF Frontend configuration (MAX2771 register settings for Pocket SDR FE) to be loaded at the receiver started. Check Device Configuration File and fill the file path. If unchecked, the current configuration for the device is used.

IF Data File *1:
IF data file path, if IF Data selected as the input source. The IF data can be captured by pocket_dump or as IF data log of the receiver with tag files.

Device Options for SoapySDR Devices:
-GAIN=gain (LNA gain),
-BW=bw (Filter Bandwidth),
Options are separated by spaces.

RF Frontend Type Selection:
Currently, only Pocket SDR FE is selectable

USB Bus/Port:
To select device in case of multiple devices connected. If blank, the device is automatically selected.

Time Offset and Scale:
Start time offset and time scale to playback the IF Data.

IF Data File Property *1:
IF Data Format, Sampling Rate, LO frequency, Sampling Type (I or IQ), Number of sample bits for each RF CH. If the tag file exist for the IF data file, these are automatically configured according to the tag file.

Input LPF Settings:
Set two-sided bandwidth (MHz) of LPF for each RF CH. 0 indicates disabled.

*1 Refer p.13 for the IF data file formats

Output Options Dialog

PVT Solution Output

Path:

PVT Solution (NMEA 0183
GNRMC, GNGGA, GNGSA,
GxGSV) path *¹.

OBS and NAV Data

Output Path:

OBS and NAV Data (RTCM 3.4
MSM (MT1077, 1087, 1097, 1117,
1127, 1137 and 1107) with
extension and EPH (MT1019,
1020, 1045, 1046, 1044, 1042
and 1041) path *¹ *²

Receiver Log

Output Path:

Receiver Log Path *¹ *³

Receiver Log Type

Selections *³

IF Data Log Output

Path:

IF Data Log Path *¹ *⁴,
It is only valid for RF
Frontend selected as the
input source

*¹ The output path should be one of the followings.

- (1) <local path>: A local file path <local path>. It can contain time keywords replaced by the log start time. Optionally, it can include the file swapping order “::S=<tint>” by the specified interval <tint> (H).
- (2) :<port>: TCP server with the port number <port>. The TCP server waits for and accepts the external TCP connection at the port and output data
- (3) <addr>:<port>: TCP client with the address <addr> and the port number <port>. The TCP client connects the external TCP server and output data

*² The output RTCM 3.4 MSM (with extensions) and EPH can be converted to RINEX OBS and NAV by CONVBIN utility included in the Pocket SDR package

*³ Refer p.14 for the receiver log format. The receiver log can be plotted by the Log Viewer pocket_plot.py in the Pocket SDR package

*⁴ Refer p.13 for the IF data log format. The output format is automatically selected according to the RF Frontend (RAW8, RAW16 or RAW32). The tag file is also generated.

Signal Options Dialog

GNSS System and Signal Selections:

System: GNSS System,
Satellite No: Satellite number or
number range (n-m) separated
by , *¹
GNSS Signals: Signal IDs to be
tracked

RF CH Assignment Options:

RF CH is automatically assigned for
signals. To assign signals to specific
RF CH(s) manually, use the option
as the format <sig>:<ch_list>
separated by spaces, where, <sig>
is signal ID and <ch_list> is RF CH
number list like 1,3,5-7.
Additionally, SRCH:<ch_list> can be
used to specify signal search CH(s)
to shorten the acquisition time.

Link to Detailed GNSS
Signal Table

The screenshot shows the 'Signal Options' dialog box. It has a table with three main columns: 'System', 'Satellite No', and 'GNSS Signals'. The 'GNSS Signals' column contains checkboxes for various signal IDs. Below the table, there is a section for 'RF CH Assignments' with a text input field and a button to 'OK'.

Pocket SDR Signal ID Table

System	Signal	Signal ID	System	Signal	Signal ID
GPS	L1C/A	L1CA	BeiDou	B1I	B1I
	L1C-D	L1CD		B1C-D	B1CD
	L1C-P	L1CP		B1C-P	B1CP
	L2C-M	L2CM		B2a-D	B2AD
	L5-I	L5I		B2a-P	B2AP
GLONASS	L5-Q	L5Q	NavIC	B2I	B2I
	L1C/A	G1CA		B2b-I	B2BI
	L10Cd	G10CD		B3I	B3I
	L10Cp	G10CP		L1-SPS-D	I1SD
	L2C/A	G2CA		L1-SPS-P	I1SP
Galileo	L20Cp	G20CP	SBAS	L5-SPS	I5S
	L30Cd	G30CD		S-SPS	ISS* ³
	L30Cp	G30CP		L1C/A	L1CA
	E1-B	E1B		L5-I	L5I
	E1-C	E1C		L5-Q	L5Q
QZSS	E5a-I	E5AI			
	E5a-Q	E5AQ			
	E5AltBOC	E5ABQ			
	E5b-I	E5BI			
	E5b-Q	E5BQ			
QZSS	E6-B	E6B			
	E6-C	E6C			
	L1C/A	L1CA			
	L1C/B	L1CB			
	L1C-D	L1CD			
	L1C-P	L1CP			
	L1S	L1S			
	L2C-M	L2CM			
	L5-I	L5I			
	L5Q	L5Q			
	L5S-I	L5SI			
	L5S-Q	L5SQ			
	L5S-Q	L5SQV* ²			
	L6D	L6D			
	L6E	L6E			

*¹ For GPS, Galileo, BeiDou, NavIC and SBAS, these satellite numbers are the same as the signal PRN numbers. For GLONASS, use the frequency channel number (FCN) for FDMA signals and satellite slot number for CDMA signals instead separated by /.
For QZSS, which has complicated satellite numbering, use SV IDs (1-5, 8, 9) or non-standard code numbers (6, 10) instead as the satellite numbers.

*² QZSS L5S verification mode signals

*³ Pocket SDR FE currently does not support S-band signals

System Options Dialog

PVT Options Selection:

Epoch Interval (s), Max Epoch Lag (s) and Elevation angle Mask (deg)

Signal Acquisition and Tracking Options Selection:

Correlation Spacing (chip), Non-coherent Integration Time for Acquisition (s), Non-coherent Integration Time for DLL (s), Loop filter bandwidth for DLL, PLL, FLL (wide-band) and FLL (narrow-band) (Hz), Max Doppler Frequency search range (Hz), C/N0 thresholds for signal-lock or signal-lost decision (dB-Hz), Bump-Jump for BOC modulation enabled or disabled, Max code length for direct acquisition (ms).

The screenshot shows the 'System Options' dialog box with various configuration parameters. Blue boxes and arrows highlight specific sections: 1. A box at the top contains 'Epoch Interval for PVT (s)' (1.0), 'Max Epoch Lag for PVT (s)' (1.0), and 'Elevation Mask for PVT (°)' (15). 2. A larger box covers the middle section with parameters like 'Correlator Spacing (chip)', 'Integration Time for Acquisition (s)', 'Integration Time for DLL (s)', 'DLL Loop Filter Bandwidth (Hz)', 'PLL Loop Filter Bandwidth (Hz)', 'FLL Loop Filter Bandwidth Wide (Hz)', 'FLL Loop Filter Bandwidth Narrow (Hz)', 'Max Doppler Frequency to Search Signal (Hz)', 'C/N0 Threshold for Signal Locked (dB-Hz)', 'C/N0 Threshold for Signal Lost (dB-Hz)', 'Bump Jump for BOC Modulation', 'Signal Acquisition Mode' (Fast-Search), and 'Max Code Length for direct acquisition (ms)'. 3. A box at the bottom highlights the 'FFTW Wisdom Path' field, which contains 'C:/share/PocketSDR/python/fftw_wisdom.txt'. 4. The 'Receiver Options' section at the very bottom is also highlighted. The dialog has 'OK' and 'Cancel' buttons at the bottom right.

Parameter	Value
Epoch Interval for PVT (s)	1.0
Max Epoch Lag for PVT (s)	1.0
Elevation Mask for PVT (°)	15
Correlator Spacing (chip)	0.2
Integration Time for Acquisition (s)	0.02
Integration Time for DLL (s)	0.02
DLL Loop Filter Bandwidth (Hz)	0.5
PLL Loop Filter Bandwidth (Hz)	10.0
FLL Loop Filter Bandwidth Wide (Hz)	10.0
FLL Loop Filter Bandwidth Narrow (Hz)	5.0
Max Doppler Frequency to Search Signal (Hz)	5000
C/N0 Threshold for Signal Locked (dB-Hz)	35.0
C/N0 Threshold for Signal Lost (dB-Hz)	30.5
Bump Jump for BOC Modulation	ON
Signal Acquisition Mode	Fast-Search
Max Code Length for direct acquisition (ms)	5.0
FFTW Wisdom Path	C:/share/PocketSDR/python/fftw_wisdom.txt
Receiver Options	

Signal Acquisition Mode Selection:

Full-Search: All PRN signals are searched.

Fast-Search: Only signals of visible satellites are searched for fast acquisition.

The visibility is estimated with CPU time, last or current FIX position, almanac or ephemeris of each satellites. The Doppler also is decided by last or current reference oscillator freq. offset. So, if FE changed, use Full-Search.

FFTW Wisdom Path:

FFTW wisdom file path to shorten the signal acquisition time. The file can be generated by the utility fftw_wisdom in the Pocket SDR package.

Receiver Specific Options

Array Options Dialog

Array Element
Horizontal Plot
(Antenna Geometry)

Antenna Geometry
Load and Save Buttons

The dialog window titled "Array Options" contains a "Number of Array CH" dropdown menu at the top right, currently set to 0. Below it is a horizontal plot showing a circular arrangement of 7 numbered antenna elements (1-7) on a grid. Under the plot are "Load...", "Save...", "Clear", and "Update" buttons. At the bottom is a table with columns "RF CH", "POSX", "POSY", and "POSZ". The table lists 8 channels (CH1-CH8) with checkboxes for enabling/disabling them and numerical values for their positions in meters. "OK" and "Cancel" buttons are at the very bottom.

RF CH	POSX	POSY	POSZ
☒ CH1	0.0000	0.0000	0.0000 m
☒ CH2	0.0000	0.0951	0.0000 m
☒ CH3	0.0824	0.0476	0.0000 m
☒ CH4	0.0824	-0.0476	0.0000 m
☒ CH5	0.0000	-0.0951	0.0000 m
☒ CH6	-0.0824	-0.0476	0.0000 m
☒ CH7	-0.0824	0.0476	0.0000 m
☐ CH8	0.0000	0.0000	0.0000 m


Number of Array CH
enabled.

Antenna Geometry
Clear and Update
Buttons

Enable/Disable and
Positions X, Y, Z (m) in
body-frame for each
Antenna Element.

IF Data File Formats

I_i : i-CH I-sample, Q_i : i-CH Q-sample * Q-polarity inverted due to MAX2771 convention

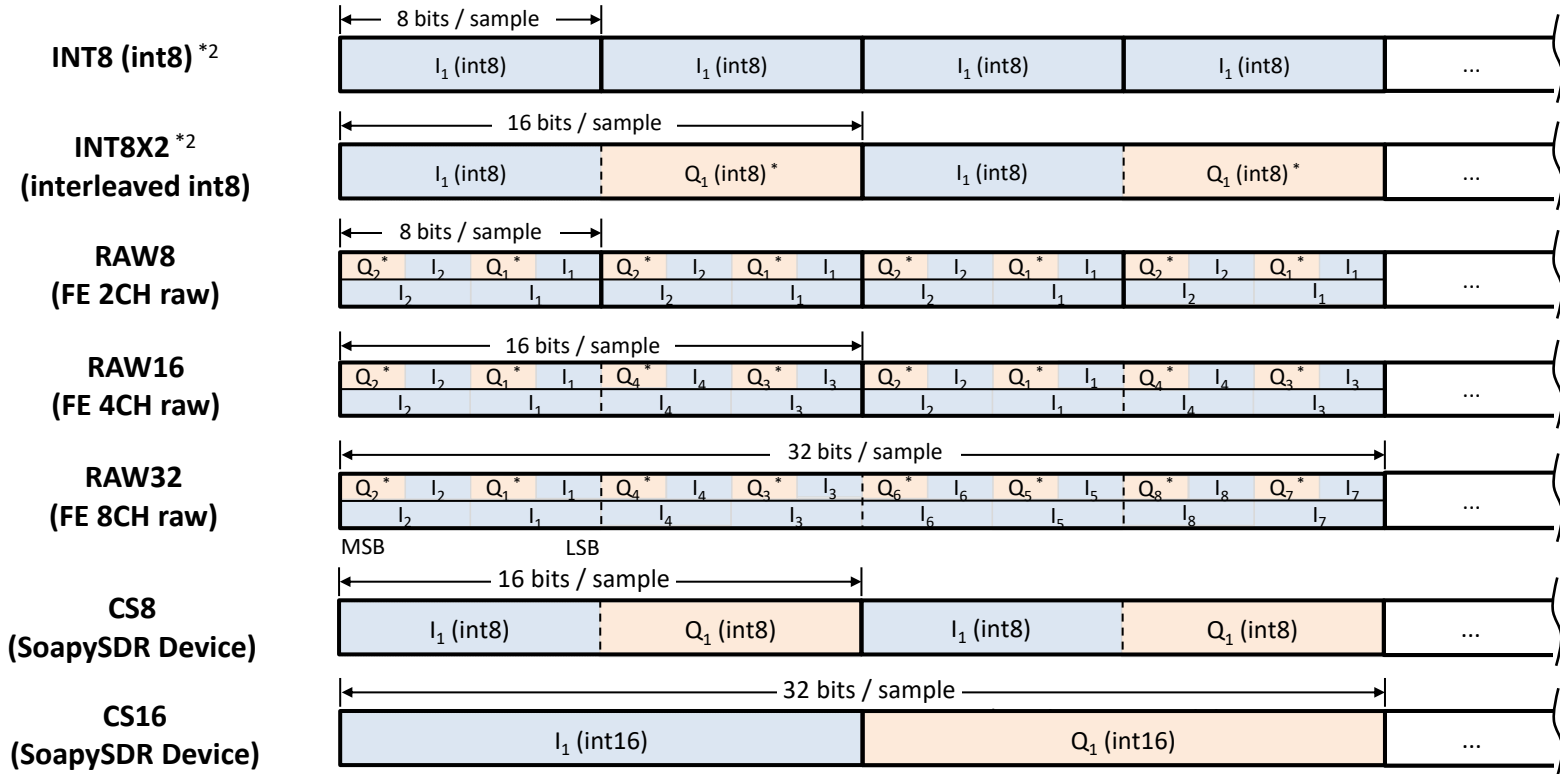

2 bits IQ-sampling (RAW8/16/32)

bits	00	01	10	11
I	+1	+3	-1	-3
Q *	-1	-3	+1	+3

2 bits I-sampling (RAW8/16/32)

bits	**00	**01	**10	**11
I	+1	+3	-1	-3

3 bits I-sampling (RAW8/16/32)

bits	0000	1000	0001	1001	0010	1010	0011	1011
I	+1	+3	+5	+7	-1	-3	-5	-7

IF Data Tag File (<path>.tag)

```

PROG = Pocket SDR
TIME = 2024/11/01 20:48:00.776 (Start Time GPST)
FMT = RAW16 (Format)
F_S = 24 (Sampling Freq. MHz)
F_LO = 1568,1237.8,1176.45,1278.75 (LO Freq. MHz)
IQ = 2,2,2,2 (Sampling, 1:I, 2:IQ)
BITS = 2,2,2,2 (Sampling Bits)
    
```

Receiver Logs

\$TIME,time,year,mon,day,hour,min,sec,tsys (time info)
\$OBS,time,year,month,day,hour,min,sec,sat,code,cn0,pr,cp,dop,lli,fcn (OBS data)
\$NAV,time,sat,sig,nerr,size,data (raw NAV data)
\$POS,time,year,month,day,hour,min,sec,lat,lon,htg,Q,ns,stdn,stde,stdu,dtr (position solution)
\$SAT,time,year,month,day,hour,min,sec,sat,pvt,obs,cn0,az,el,res (satellite info)
\$EPH,time,sat,sig,IODE,IODC,SVA,SVH,Toe,Toc,Ttr,A,e,i0,OMEGA0,omega,M0,delta-n,OMEGAdot,Idot,Crc,Crs,Cuc,Cus,Cic,Cis,Toes,Fit,Af0,Af1,Af2,TGD,code,flag (GPS/Galileo/QZSS/BeiDou/NavIC decoded ephemeris)
\$EPH,time,sat,sig,tb,fcn,SVH,SVA,age,Toe,Tof,pos-x,pos-y,pos-z,vel-x,vel-y,vel-z,acc-x,acc-y,acc-z,tau-n,gamma-n,delta-tau-n (GLONASS decoded ephemeris)
\$ALM,time,sat,sig,svh,week,A,e,i0,OMG0,omg,M0,OMGd,toas,f0,f1 (GPS,Galileo,QZSS,BeiDou decoded almanac)
\$ALM,time,sat,sig,svh,taun,lambda,di,eps,omg,tlambda,dT,dTd,frq (GLONASS decoded almanac)
\$CH,time,ch,rfch,sat,sig,prn,lock,cn0,coff,dop,adr,ssync,bsync,fsync,rev,srev,err_phas,err_code,tow_v,tow,week,type,nnav,nerr,nlol,nfec (receiver channel info)
\$LOG,time,message (error, warning, general info message)

\$TIME
 time receiver time (s)
 year year (2000-2099)
 mon month (1-12)
 day day (1-31)
 hour hour (0-23)
 min minute (0-59)
 sec second (0.000-59.999)
 tsys time system (GPST or UTC)

\$OBS
 time receiver time (s)
 year,month,day solution day (GPST)
 obs data day (GPST)
 hour,min,sec solution time (GPST)
 sat satellite ID
 code RINEX obs code
 cn0 C/N0 (dB-Hz)
 pr pseudorange (m)
 cp carrier phase (cyc)
 dop Doppler frequency (Hz)
 lli loss-of-lock indicator
 fcn frequency channel number for GLONASS FDMA signals

\$NAV
 time receiver time (s)
 sat satellite ID
 sig signal ID
 nerr number of corrected error
 bits
 size raw NAV data size (bits)
 data raw NAV data HEX dump
\$POS
 time receiver time (s)
 year,month,day solution day (GPST)
 hour,min,sec solution time (GPST)
 lat solution latitude (deg,+north,-south)
 lon solution longitude (deg,+east,-west)
 hgt solution ellipsoidal height (m)
 Q quality flag (=5: single)
 ns number of valid satellites
 stdn solution standard-dev north (m)
 stde solution standard-dev east (m)
 stdu solution standard-dev up (m)
 dtr receiver clock bias (s)

\$SAT
 time receiver time (s)
 year,month,day solution day (GPST)
 hour,min,sec solution time (GPST)
 sat satellite ID
 pvt PVT status (0:not used,1:used)
 obs L1 obs data status (0:unavailable,1:available)
 cn0 L1 signal C/N0 (dB-Hz)
 az azimuth angle (deg)
 el elevation angle (deg)
 res L1 pseudorange residual (m)

\$EPH
 time receiver time (s)
 sat satellite ID
 sig signal ID
 ... decoded ephemeris parameters

\$ALM
 time receiver time (s)
 sat satellite ID
 sig signal ID
 ... decoded almanac parameters

\$LOG
 time receiver time (s)
 message error, warning or general info message

\$CH
 time receiver time (s)
 ch receiver channel number
 rfch RF channel number
 sat satellite ID
 sig signal ID
 prn PRN number
 lock lock time (s)
 cn0 C/N0 (dB-Hz)
 coff code offset (ms)
 dop Doppler frequency (Hz)
 adr accumulated Doppler range (cyc)
 ssync secondary code sync flag (0:async,1:sync)
 bsync symbol/bit sync flag (0:async,1:sync)
 fsync frame sync flag (0:async,1:sync)
 rev primary code polarity (0:normal,1:reversed)
 srev secondary code polarity (0:normal,1:reversed)
 err_phas phase error (cyc)
 err_code code error (10^-6 s)
 tow_v tow valid flag (0:invalid,1:valid,2:ambiguity unresolved)
 tow time of week (ms)
 week week number (week)
 type navigation subframe or message type
 nnav navigation subframe/message count
 nerr error subframe/message count
 nlol loss-of-lock count
 nfec number of error corrected (bits)