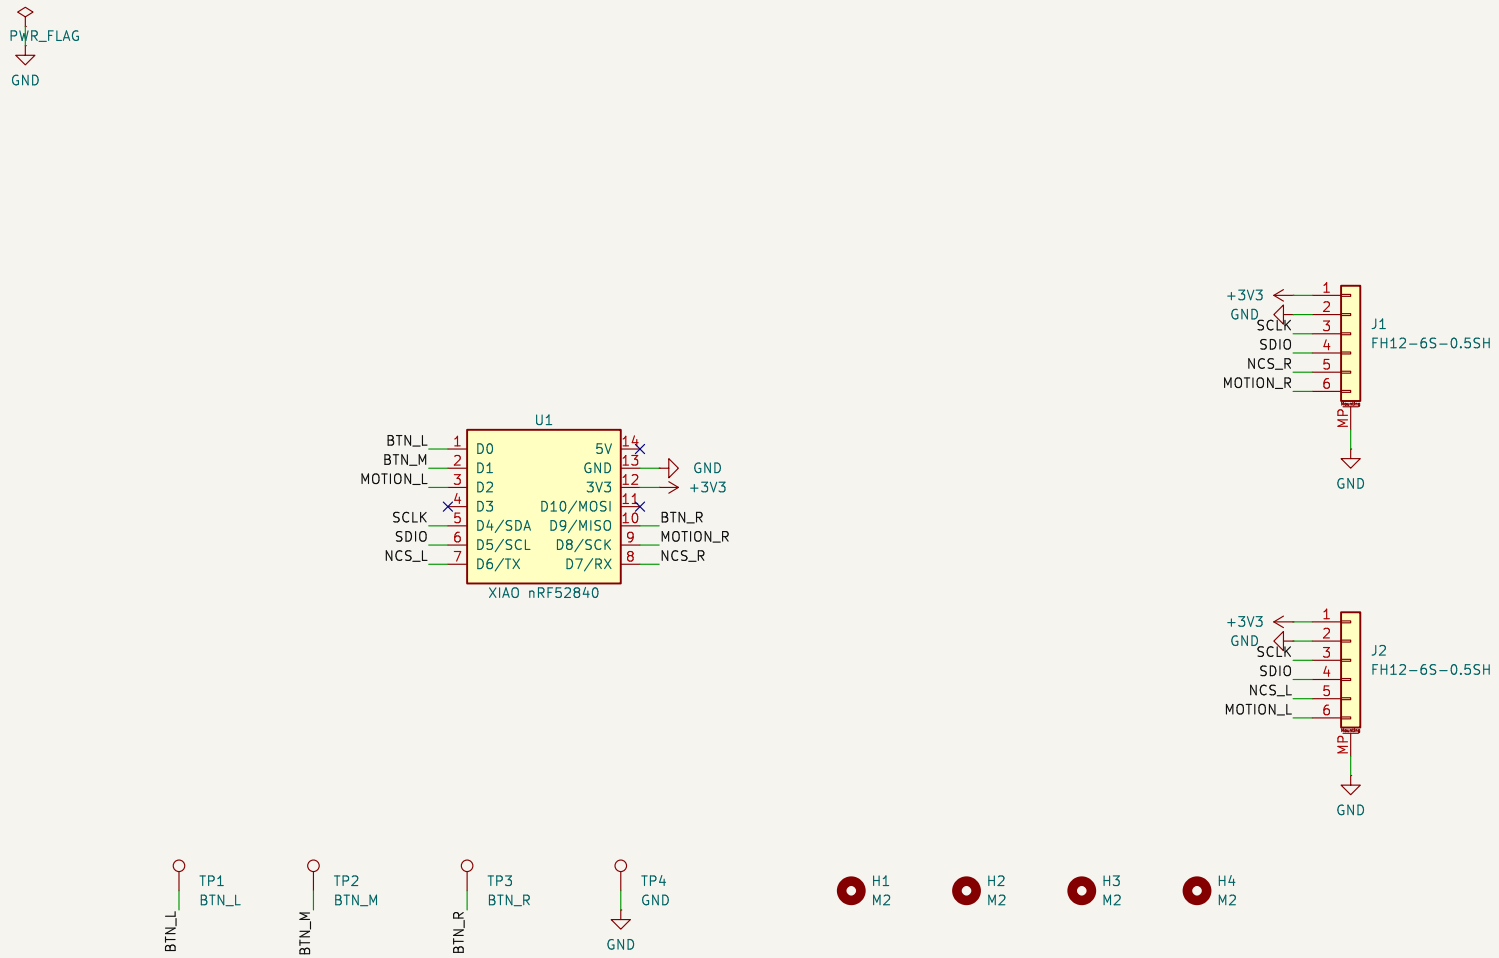


XIAO pins as in zmk/boards/shields/rollino/rollino.overlay; NCS/MOTION _R = right sensor (J1), _L = left (J2)

J1/J2 (FPC): 1 +3V3, 2 GND, 3 SCLK, 4 SDIO, 5 NCS, 6 MOTION — or reversed, so each signal meets itself through the ribbon

SDIO goes to both SPI MOSI (D5) and MISO: the firmware puts them on the same pin

The battery's leads go straight to the XIAO's battery pads.
FPC connectors to the two sensor boards, pads for optional buttons.
XIAO nRF52840 soldered upside down (parts through the cutout),

Sheet: /
File: rollino-base.kicad_sch

Title: Rollino base board

Size: A4	Date:	**Rev: 1**
KiCad E.D.A. 8.0.5		Id: 1/1