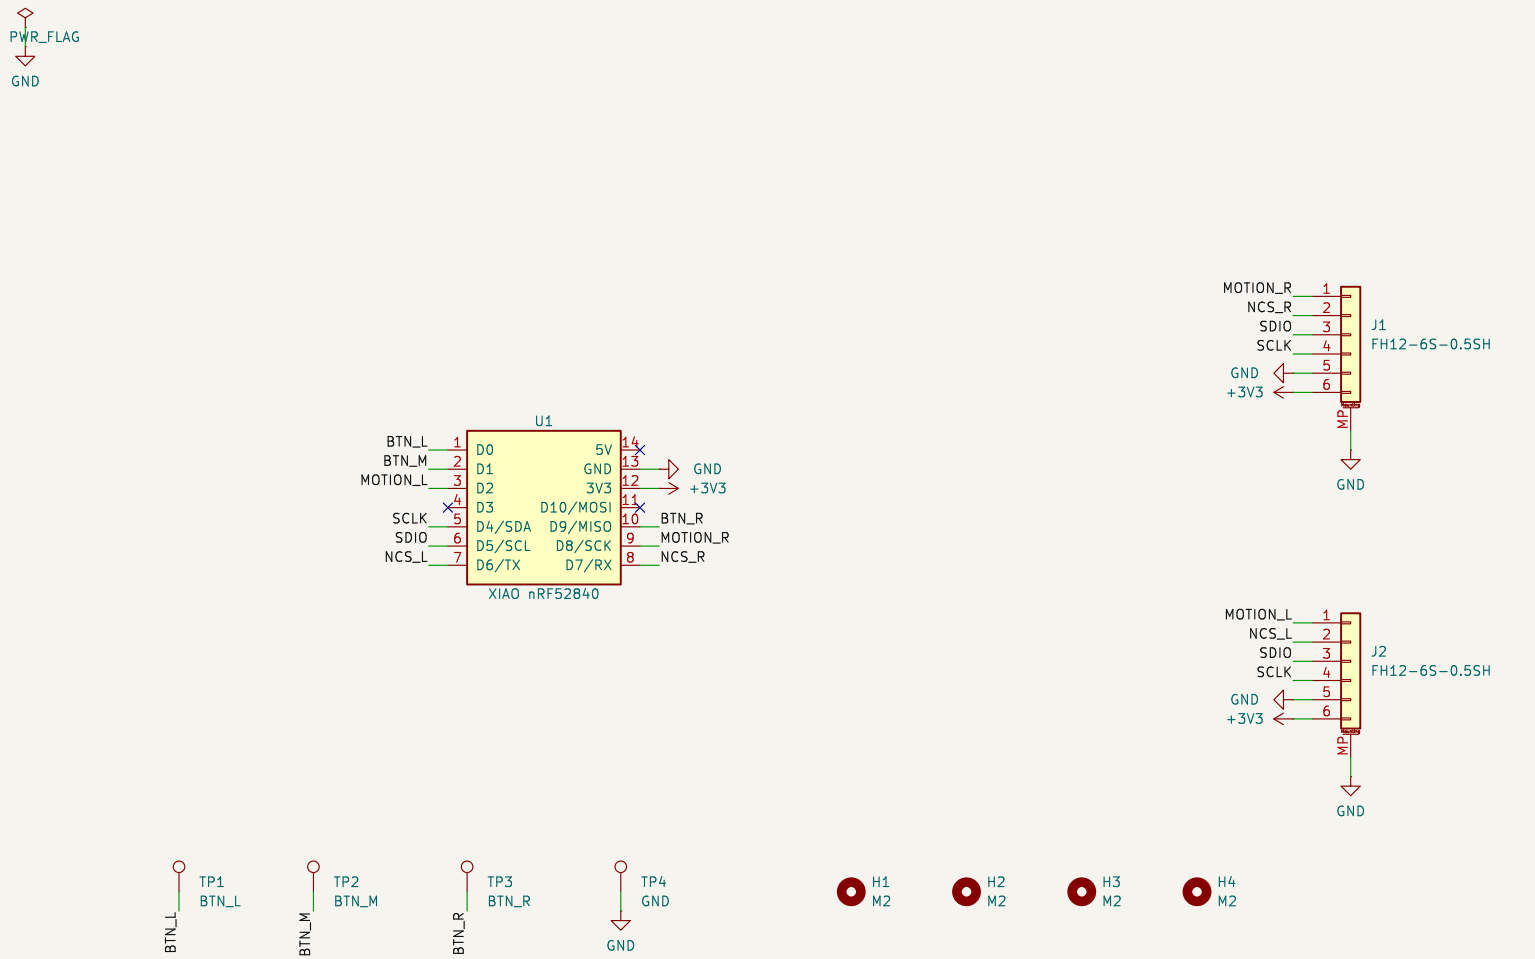


XIAO pins as in zmk/boards/shields/rollino/rollino.overlay; NCS/MOTION _R = right sensor (J1), _L = left (J2)

J1/J2 (FPC): 1 +3V3, 2 GND, 3 SCLK, 4 SDIO, 5 NCS, 6 MOTION — or reversed, so each signal meets itself through the ribbon

SDIO goes to both SPI MOSI (D5) and MISO: the firmware puts them on the same pin

FPC connectors to the two sensor boards, pads for optional buttons.
XIAO nRF52840 soldered upside down (parts through the cutout),

Sheet: /
File: rollino-base.kicad_sch

Title: Rollino base board

Size: A4	Date:	**Rev: 1**
KiCad E.D.A. 8.0.5		Id: 1/1